



Bricsys®

# Riferimento Variabili di Sistema V21

## Documentazione del Prodotto





# Indice

1.	System variable reference	50
1.1	System variable data types	50
1.2	System variables save location	50
1.3	Editing system variables	50
1.4	Searching for variables	51
2.		52
2.1	_PKSER system variable	52
2.1.1	Packet serial	52
2.2	_QUADTABFLAGS system variable	52
2.2.1	Quad tab flags	52
2.3	_VERNUM system variable	52
2.3.1	Version number	52
3.		54
3.1	_3DCOMPAREMODE system variable	54
3.1.1	Compare visualization mode	54
3.2	_3DOSMODE system variable	54
3.2.1	Entity 3D snap mode	54
3.3	_3DSNAPMARKERCOLOR system variable	55
3.3.1	3d snap marker color	55
4.		56
4.1	ACADLSPASDOC system variable	56
4.1.1	on_start.lsp for each doc	56
4.2	ACADPREFIX system variable	56
4.2.1	Program folder path	56
4.3	ACADVER system variable	56
4.3.1	AutoCAD version	56
4.4	ACISHLRRESOLUTION system variable	57
4.4.1	Hidden line removal resolution	57
4.5	ACISOUTVER system variable	57
4.5.1	Acisout version	57
4.6	ADAPTIVEGRIDSTEPSENSE system variable	57
4.6.1	Adaptive grid step size	57
4.7	AFLAGS system variable	58
4.7.1	Attribute options	58
4.8	ALLOWTABEXTERNALMOVE system variable	58
4.8.1	Move tabs externally	58
4.9	ALLOWTABMOVE system variable	58
4.9.1	Move tabs	58
4.10	ALLOWTABSPLIT system variable	59
4.10.1	Split tabs	59
4.11	ANGBASE system variable	59
4.11.1	Angle base	59
4.12	ANGDIR system variable	59
4.12.1	Angle direction	59
4.13	ANNOALLVISIBLE system variable	60
4.13.1	Annotation visibility	60
4.14	ANNOAUTOSCALE system variable	60



# Indice

4.14.1	Annotation scaling	60
4.15	ANNOSELECTED system variable	61
4.15.1	Selected object is annotative	61
4.16	ANNOTATIVEDWG system variable	61
4.16.1	Annotative drawing	61
4.17	ANTIALIASRENDER system variable	62
4.17.1	Anti-alias amount for render	62
4.18	ANTALIASSCREEN system variable	62
4.18.1	Anti-alias amount for screen	62
4.19	APBOX system variable	63
4.19.1	Entity snap aperture box	63
4.20	APERTURE system variable	63
4.20.1	Entity snap aperture	63
4.21	AREA system variable	64
4.21.1	Calculated area	64
4.22	AREAPREC system variable	64
4.22.1	Area precision	64
4.23	AREAUNITS system variable	65
4.23.1	Area units	65
4.24	ARRAYASSOCIATIVITY system variable	65
4.24.1	Associative arrays	65
4.25	ARRAYEDITSTATE system variable	65
4.25.1	Array editing state	65
4.26	ARRAYTYPE system variable	66
4.26.1	Array type	66
4.27	ASSOCIATIVITY system variable	66
4.27.1	Associativity	66
4.28	ATTDIA system variable	66
4.28.1	Attribute dialog	66
4.29	ATTMODE system variable	67
4.29.1	Attribute display mode	67
4.30	ATTRACTONDISTANCE system variable	67
4.30.1	Grips attraction distance	67
4.31	ATTREQ system variable	67
4.31.1	Insertion default settings	67
4.32	AUDITCTL system variable	68
4.32.1	Audit control	68
4.33	AUDITERRORCOUNT system variable	68
4.33.1	Audit Error Count	68
4.34	AUNITS system variable	68
4.34.1	Angular unit type	68
4.35	AUPREC system variable	69
4.35.1	Angular unit precision	69
4.36	AUTOADOPTSIZE system variable	69
4.36.1	Auto adopt sizes	69
4.37	AUTOCOMPLETEDELAY system variable	70
4.37.1	Auto complete delay	70
4.38	AUTOCOMPLETEMODE system variable	70



# Indice

4.38.1	Auto complete mode	70
4.39	AUTOMENULOAD system variable	71
4.39.1	Auto menu load	71
4.40	AUTORESETSCALES system variable	71
4.40.1	Purge unused scales	71
4.41	AUTOSAVECHECKSONLYFIRSTBITDBMOD system variable	71
4.41.1	Ignore all but first bit of DBMOD for autosave	71
4.42	AUTOSNAP system variable	72
4.42.1	AutoSnap	72
4.43	AUTOTRACKINGVECCOLOR system variable	72
4.43.1	Auto tracking vector color	72
4.44	AUTOVPFITTING system variable	73
4.44.1	Automatically fit viewport borders	73
4.45	AXISMODE system variable	73
4.45.1	Axis mode	73
4.46	AXISUNIT system variable	73
4.46.1	Axis unit	73
5.	B	74
5.1	BACKGROUNDPLOT system variable	74
5.1.1	Background plotting	74
5.2	BACKZ system variable	74
5.2.1	Back clipping plane offset	74
5.3	BASEFILE system variable	74
5.3.1	Template	74
5.4	BCFSOURCEURL system variable	75
5.4.1	BCF source URL	75
5.5	BIMACTIVATEPYTHON system variable	75
5.5.1	Activate Python	75
5.6	BIMOSMODE system variable	75
5.6.1	BIM snap mode	75
5.7	BIMPROFILESTANDARDS system variable	76
5.7.1	Profile's standards	76
5.8	BINDTYPE system variable	76
5.8.1	Xref bind type	76
5.9	BKGCOLOR system variable	76
5.9.1	Background color	76
5.10	BKGCOLORPS system variable	77
5.10.1	Paper space background color	77
5.11	BLIPMODE system variable	77
5.11.1	Blip mode	77
5.12	BLOCKEDITLOCK system variable	78
5.12.1	Block editor lock	78
5.13	BLOCKEDITOR system variable	78
5.13.1	Block editor	78
5.14	BLOCKIFYMODE system variable	78
5.14.1	Blockify settings	78
5.15	BLOCKIFYTOLERANCE system variable	79
5.15.1	Blockify tolerance	79



# Indice

5.16	BLOCKSPATH system variable	79
5.16.1	Blocks path	79
5.17	BMAUTOUPDATE system variable	79
5.17.1	Update external components	79
5.18	BMFORMTEMPLATEPATH system variable	80
5.18.1	BMFORM template path	80
5.19	BMUPDATEMODE system variable	80
5.19.1	Assembly components updating mode	80
5.20	BOUNDARYCOLOR system variable	80
5.20.1	Detected Boundary Color	80
5.21	BSYSLIBCOPYOVERWRITE system variable	81
5.21.1	Bsystlib copy overwrite	81
5.22	BVMODE system variable	81
5.22.1	Block Visibility Mode	81
6.	C	83
6.1	CACHELAYOUT system variable	83
6.1.1	Cache layout	83
6.2	CAMERADISPLAY system variable	83
6.2.1	Camera display	83
6.3	CAMERAHEIGHT system variable	83
6.3.1	Camera height	83
6.4	CANNOSCALE system variable	84
6.4.1	Annotation scale name	84
6.5	CANNOSCALEVALUE system variable	84
6.5.1	Annotation scale value	84
6.6	CDATE system variable	84
6.6.1	Calendar date	84
6.7	CECOLOR system variable	84
6.7.1	Entity color	84
6.8	CELTSCALE system variable	85
6.8.1	Entity linetype scale	85
6.9	CELTYPE system variable	85
6.9.1	Entity linetype	85
6.10	CELWEIGHT system variable	85
6.10.1	Entity linewidth	85
6.11	CENTERCROSSGAP system variable	86
6.11.1	Center mark cross gap	86
6.12	CENTERCROSSSIZE system variable	86
6.12.1	Center mark cross size	86
6.13	CENTEREXE system variable	87
6.13.1	Centerline extensions length	87
6.14	CENTERLAYER system variable	88
6.14.1	Default layer for center mark or centerline	88
6.15	CENTERLTSIZE system variable	88
6.15.1	Linetype scale for center mark or centerline	88
6.16	CENTERLTYPE system variable	88
6.16.1	Linetype for center mark or centerline	88
6.17	CENTERLTYPEFILE system variable	88



# Indice

6.17.1	Linetype file for center mark or centerline	88
6.18	CENTERMARKEXE system variable	89
6.18.1	Automatic extension for center mark or centerline	89
6.19	CETRANSPARENCY system variable	89
6.19.1	Transparency for new entities	89
6.20	CHAMFERA system variable	90
6.20.1	Chamfer first distance	90
6.21	CHAMFERB system variable	90
6.21.1	Chamfer second distance	90
6.22	CHAMFERC system variable	90
6.22.1	Chamfer length	90
6.23	CHAMFERD system variable	91
6.23.1	Chamfer angle	91
6.24	CHAMMODE system variable	91
6.24.1	Chamfer mode	91
6.25	CHECKDWLPRESENTENCE system variable	92
6.25.1	Check Dwl file existence before open	92
6.26	CIRCLERAD system variable	92
6.26.1	Circle radius	92
6.27	CLAYER system variable	92
6.27.1	Current layer	92
6.28	CLEANSCREENOPTIONS system variable	93
6.28.1	Clean screen options	93
6.29	CLEANSCREENSTATE system variable	93
6.29.1	Clean screen state	93
6.30	CLIPBOARDFORMAT system variable	93
6.30.1	Clipboard DWG format	93
6.31	CLIPBOARDFORMATS system variable	94
6.31.1	Clipboard Formats	94
6.32	CLIPROMPTLINES system variable	95
6.32.1	Prompt Lines	95
6.33	CLISTATE system variable	95
6.33.1	Command line state	95
6.34	CLOSECHECKSONLYFIRSTBITDBMOD system variable	95
6.34.1	Ignore all but first bit of DBMOD for close	95
6.35	CLOUDDOWNLOADPATH system variable	96
6.35.1	Cloud download path	96
6.36	CLOUDLOG system variable	96
6.36.1	Cloud log	96
6.37	CLOUDLOGVERBOSE system variable	96
6.37.1	Cloud log verbose	96
6.38	CLOUDONMODIFIED system variable	97
6.38.1	Cloud on modified	97
6.39	CLOUDSERVER system variable	97
6.39.1	Cloud server	97
6.40	CLOUDTEMPFOLDER system variable	98
6.40.1	Cloud temporary folder	98
6.41	CLOUDUPLOADDEPENDENCIES system variable	98



# Indice

6.41.1	Cloud upload dependencies	98
6.42	C MATERIAL system variable	98
6.42.1	Current material	98
6.43	CMDACTIVE system variable	99
6.43.1	Active command	99
6.44	CMDDIA system variable	99
6.44.1	Command dialogs	99
6.45	CMDECHO system variable	99
6.45.1	Command echo	99
6.46	CMDLINEEDITBGCOLOR system variable	100
6.46.1	Command line edit background color	100
6.47	CMDLINEEDITFGCOLOR system variable	100
6.47.1	Command line edit foreground color	100
6.48	CMDLINEFADINGLOGBGCOLOR system variable	101
6.48.1	Command line fading log background color	101
6.49	CMDLINEFADINGLOGFADEDELAY system variable	101
6.49.1	Command line fading log fade delay	101
6.50	CMDLINEFADINGLOGFGCOLOR system variable	101
6.50.1	Command line fading log foreground color	101
6.51	CMDLINEFADINGLOGTRANSPARENCY system variable	102
6.51.1	Command line fading log transparency	102
6.52	CMDLINEFONTNAME system variable	102
6.52.1	Command line font name	102
6.53	CMDLINEFONTSIZE system variable	102
6.53.1	Command line font size	102
6.54	CMDLINEFRAMEACTIVETRANSPARENCY system variable	103
6.54.1	Command line frame transparency when active (Windows)	103
6.55	CMDLINEFRAMEINACTIVETRANSPARENCY system variable	103
6.55.1	Command line frame transparency when inactive (Windows)	103
6.56	CMDLINELISTBGCOLOR system variable	103
6.56.1	Command line list background color	103
6.57	CMDLINELISTFGCOLOR system variable	104
6.57.1	Command line list foreground color	104
6.58	CMDLINEOPTIONBGCOLOR system variable	104
6.58.1	Command line option background color	104
6.59	CMDLINEOPTIONSHORTCUTCOLOR system variable	104
6.59.1	Command line option shortcut color	104
6.60	CMDLINEUSENEWFRAME system variable	105
6.60.1	Command line use new floating frame (Windows)	105
6.61	CMDLNTEXT system variable	105
6.61.1	Prompt prefix	105
6.62	CMDNAMES system variable	105
6.62.1	Active Command Name	105
6.63	CMLEADERSTYLE system variable	106
6.63.1	Multileader style	106
6.64	CMLJUST system variable	106
6.64.1	Multiline justification	106
6.65	CMLSCALE system variable	106



# Indice

6.65.1	Multiline scale	106
6.66	CMLSTYLE system variable	107
6.66.1	Multiline style	107
6.67	CMPCLRMISS system variable	107
6.67.1	Color for displaying of missing entities in DWGCOMPARE mode	107
6.68	CMPCLRMOD1 system variable	107
6.68.1	Color for displaying of modified entities in this drawing in DWGCOMPARE mode	107
6.69	CMPCLRMOD2 system variable	108
6.69.1	Color for displaying of modified entities in the second drawing in DWGCOMPARE mode	108
6.70	CMPCLRNEW system variable	108
6.70.1	Color for displaying of new entities in DWGCOMPARE mode	108
6.71	CMPDIFFLIMIT system variable	108
6.71.1	Maximal number of entities in the output of DWGCOMPARE command	108
6.72	CMPFADECTL system variable	109
6.72.1	DWGCOMPARE fade control	109
6.73	CMPLOG system variable	109
6.73.1	DWGCOMPARE log control	109
6.74	COLORBOOKPATH system variable	109
6.74.1	Color book file search path	109
6.75	COLORTHEME system variable	110
6.75.1	UI color theme	110
6.76	COLORX system variable	110
6.76.1	X axis color	110
6.77	COLORY system variable	110
6.77.1	Y axis color	110
6.78	COLORZ system variable	111
6.78.1	Z axis color	111
6.79	COMACADCOMPATIBILITY system variable	111
6.79.1	COM Acad compatibility	111
6.80	COMBINETEXTMODE system variable	111
6.80.1	Options for COMBINETEXTMODE	111
6.81	COMMUNICATORPATH system variable	112
6.81.1	Communicator path	112
6.82	COMPASS system variable	112
6.82.1	Compass	112
6.83	COMPONENTSCONFIG system variable	113
6.83.1	Library panel configuration	113
6.84	COMPONENTSPATH system variable	113
6.84.1	Library directory path	113
6.85	CONSTRAINTBARDISPLAY system variable	113
6.85.1	Constraint Bar Display	113
6.86	CONTINUOUSMOTION system variable	114
6.86.1	Continuous motion	114
6.87	COORDS system variable	114
6.87.1	Coordinates	114
6.88	COPYMODE system variable	114
6.88.1	Copy mode	114
6.89	CPLOTSTYLE system variable	115



# Indice

6.89.1	Current plot style	115
6.90	CPROFILE system variable	115
6.90.1	Current profile	115
6.91	CREATETHUMBNAILONTHEFLY system variable	115
6.91.1	Create preview thumbnail on the fly	115
6.92	CREATEVIEWPORTS system variable	116
6.92.1	Automatic viewport creation	116
6.93	CROSSHAIRDRAWMODE system variable	116
6.93.1	Crosshair rendering mode	116
6.94	CROSSINGAREACOLOR system variable	117
6.94.1	Crossing area color	117
6.95	CTAB system variable	117
6.95.1	Current tab	117
6.96	CTABLESTYLE system variable	117
6.96.1	Current table style	117
6.97	CTRL3D.MOUSE system variable	118
6.97.1	3D mouse mode	118
6.98	CTRL.MOUSE system variable	118
6.98.1	Mouse shortcuts	118
6.99	CURSORSIZE system variable	119
6.99.1	Crosshairs size	119
6.100	CVPORT system variable	119
6.100.1	Current viewport	119
7.	D	120
7.1	DATACOLLECTION system variable	120
7.1.1	Diagnostics and usage data collection	120
7.2	DATALINKNOTIFY system variable	120
7.2.1	Notification of data links	120
7.3	DATE system variable	121
7.3.1	Current date	121
7.4	DBCSTATE system variable	121
7.4.1	DbConnect state	121
7.5	DBLCLKEDIT system variable	121
7.5.1	Double click editing	121
7.6	DBMOD system variable	122
7.6.1	Modification status	122
7.7	DCTCUST system variable	122
7.7.1	Custom spelling dictionary	122
7.8	DCTMAIN system variable	122
7.8.1	Main spelling dictionary	122
7.9	DEFAULTBSYSLIBIMPERIAL system variable	123
7.9.1	Default Bsylisb imperial	123
7.10	DEFAULTBSYSLIBMETRIC system variable	123
7.10.1	Default Bsylisb metric	123
7.11	DEFAULTLIGHTING system variable	123
7.11.1	Default lighting	123
7.12	DEFAULTCURVETYPEHA system variable	124
7.12.1	Default curve for horizontal alignments	124



# Indice

7.13	DEFAULTCURVETYPEVA system variable	124
7.13.1	Default curve for vertical alignments	124
7.14	DEFAULTLIGHTSHADOWBLUR system variable	124
7.14.1	Default light shadow blur	124
7.15	DEFAULTNEWSHEETTEMPLATE system variable	125
7.15.1	Default new sheet template	125
7.16	DEFPLLSTYLE system variable	125
7.16.1	Default layer plot style	125
7.17	DEFPLSTYLE system variable	125
7.17.1	Default entity plot style	125
7.18	DELETEINTERFERENCE system variable	126
7.18.1	Delete interference	126
7.19	DELETETOOL system variable	126
7.19.1	Delete tool	126
7.20	DELOBJ system variable	127
7.20.1	Delete entity	127
7.21	DEMANDLOAD system variable	127
7.21.1	Demand load	127
7.22	DETAILSPATH system variable	128
7.22.1	Details directory path	128
7.23	DGNEXPXREFMODE system variable	128
7.23.1	Export Conversion of Xrefs	128
7.24	DGNFRAME system variable	128
7.24.1	DGN frame	128
7.25	DGNIMP2DCLOSEDBSPLINECURVEIMPORTMODE system variable	129
7.25.1	2D closed B-spline curve import mode	129
7.26	DGNIMP2DELLIPSEIMPORTMODE system variable	129
7.26.1	2D ellipse import mode	129
7.27	DGNIMP2DSHAPEIMPORTMODE system variable	130
7.27.1	2D shape import mode	130
7.28	DGNIMP3DCLOSEDBSPLINECURVEIMPORTMODE system variable	130
7.28.1	3D closed B-spline curve import mode	130
7.29	DGNIMP3DELLIPSEIMPORTMODE system variable	131
7.29.1	3D ellipse import mode	131
7.30	DGNIMP3DOBJECTIMPORTMODE system variable	131
7.30.1	3D object import mode	131
7.31	DGNIMP3DSHAPEIMPORTMODE system variable	131
7.31.1	3D shape import mode	131
7.32	DGNIMPBREAKDIMENSIONASSOCIATION system variable	132
7.32.1	Break dimension association	132
7.33	DGNIMP CONVERT DGN COLOR INDICES TO TRUE COLORS system variable	132
7.33.1	Convert DGN color indices to true colors	132
7.34	DGNIMP CONVERT EMPTY DATA FIELDS TO SPACES system variable	133
7.34.1	Convert empty data fields to spaces	133
7.35	DGNIMPERASE UNUSED RESOURCES system variable	133
7.35.1	Erase unused resources	133
7.36	DGNIMP EXPLODE TEXT NODES system variable	134
7.36.1	Explode text nodes	134



# Indice

7.37	DGNIMPIMPORTACTIVEMODELTOMODELSPACE system variable	134
7.37.1	Import active model to Model Space	134
7.38	DGNIMPIMPORTINVISIBLEELEMENTS system variable	135
7.38.1	Import invisible elements	135
7.39	DGNIMPIMPORTPAPERSPACEMODELS system variable	135
7.39.1	Import Paper Space models	135
7.40	DGNIMPIMPORTVIEWINDEX system variable	135
7.40.1	Import view index	135
7.41	DGNIMPRECOMPUTEDIMENSIONSAFTERIMPORT system variable	136
7.41.1	Recompute dimensions after import	136
7.42	DGNIMPSSYMBOLRESOURCEFILES system variable	136
7.42.1	Symbol resource files	136
7.43	DGNIMPXREFIMPORTMODE system variable	137
7.43.1	External references import mode	137
7.44	DGNOSNAP system variable	137
7.44.1	Dgn entity snap	137
7.45	DIASTAT system variable	137
7.45.1	Dialog state	137
7.46	DIMADEC system variable	138
7.46.1	Dim angle precision	138
7.47	DIMALT system variable	138
7.47.1	Alt units	138
7.48	DIMALTD system variable	139
7.48.1	Alt precision	139
7.49	DIMALTF system variable	139
7.49.1	Alt multiplier	139
7.50	DIMALTRND system variable	139
7.50.1	Alt roundoff	139
7.51	DIMALTTD system variable	139
7.51.1	Alt tolerance precision	139
7.52	DIMALTTZ system variable	140
7.52.1	Alt tolerance suppress zeros	140
7.53	DIMALTU system variable	140
7.53.1	Alt unit type	140
7.54	DIMALTZ system variable	141
7.54.1	Alt suppress zeros	141
7.55	DIMANNO system variable	141
7.55.1	Style is annotative	141
7.56	DIMAPOST system variable	142
7.56.1	Alt units prefix/suffix	142
7.57	DIMARCSYM system variable	142
7.57.1	Arc symbol	142
7.58	DIMASO system variable	142
7.58.1	Associativity (Obsolete)	142
7.59	DIMASSOC system variable	143
7.59.1	Associativity	143
7.60	DIMASZ system variable	143
7.60.1	Arrow size	143



# Indice

7.61	DIMATFIT system variable	143
7.61.1	Arrow and text fit	143
7.62	DIMAUNIT system variable	144
7.62.1	Dim angle units	144
7.63	DIMAZIN system variable	144
7.63.1	Suppress angle zeros	144
7.64	DIMBLK system variable	145
7.64.1	Arrow	145
7.65	DIMBLK1 system variable	145
7.65.1	Arrow 1	145
7.66	DIMBLK2 system variable	145
7.66.1	Arrow 2	145
7.67	DIMCEN system variable	145
7.67.1	Center mark	145
7.68	DIMCLRD system variable	146
7.68.1	Dim line color	146
7.69	DIMCLRE system variable	146
7.69.1	Ext line color	146
7.70	DIMCLRT system variable	147
7.70.1	Text color	147
7.71	DIMDEC system variable	147
7.71.1	Dim precision	147
7.72	DIMDLE system variable	147
7.72.1	Dim line ext	147
7.73	DIMDLI system variable	148
7.73.1	Dim baseline spacing	148
7.74	DIMDSEP system variable	148
7.74.1	Decimal separator	148
7.75	DIMEXE system variable	148
7.75.1	Ext line ext	148
7.76	DIMEXO system variable	148
7.76.1	Ext line offset	148
7.77	DIMFIT system variable	149
7.77.1	Dimension text fit (Obsolete)	149
7.78	DIMFRAC system variable	149
7.78.1	Fractional type	149
7.79	DIMFXL system variable	149
7.79.1	Ext line fixed length	149
7.80	DIMFXLON system variable	150
7.80.1	Ext line fixed	150
7.81	DIMGAP system variable	150
7.81.1	Text offset	150
7.82	DIMJOGANG system variable	150
7.82.1	Jogged angle	150
7.83	DIMJUST system variable	151
7.83.1	Horizontal text position	151
7.84	DIMLAYER system variable	151
7.84.1	Default layer for new dimensions	151



# Indice

7.85	DIMLDRBLK system variable	152
7.85.1	Leader arrow	152
7.86	DIMLFAC system variable	152
7.86.1	Dim scale linear	152
7.87	DIMLIM system variable	152
7.87.1	Tolerance method	152
7.88	DIMLTEX1 system variable	153
7.88.1	Ext line 1 linetype	153
7.89	DIMLTEX2 system variable	153
7.89.1	Ext line 2 linetype	153
7.90	DIMLTYPE system variable	153
7.90.1	Dim line linetype	153
7.91	DIMLUNIT system variable	153
7.91.1	Dim units	153
7.92	DIMLWD system variable	154
7.92.1	Dim line lineweight	154
7.93	DIMLWE system variable	154
7.93.1	Ext line LW	154
7.94	DIMPOST system variable	155
7.94.1	Dim prefix/suffix	155
7.95	DIMRND system variable	155
7.95.1	Dim round	155
7.96	DIMSAH system variable	155
7.96.1	Arrowheads	155
7.97	DIMSCALE system variable	156
7.97.1	Dim scale overall	156
7.98	DIMSD1 system variable	156
7.98.1	Dim line 1	156
7.99	DIMSD2 system variable	157
7.99.1	Dim line 2	157
7.100	DIMSE1 system variable	157
7.100.1	Ext line 1	157
7.101	DIMSE2 system variable	157
7.101.1	Ext line 2	157
7.102	DIMSHO system variable	158
7.102.1	Dimension show (Obsolete)	158
7.103	DIMSOXD system variable	158
7.103.1	Dim line inside	158
7.104	DIMSTYLE system variable	158
7.104.1	Dimension style	158
7.105	DIMTAD system variable	159
7.105.1	Vertical text position	159
7.106	DIMTDEC system variable	159
7.106.1	Tolerance precision	159
7.107	DIMTFAC system variable	159
7.107.1	Tolerance text height	159
7.108	DIMTFILL system variable	160
7.108.1	Text fill	160



# Indice

7.109	DIMTFILLCLR system variable	160
7.109.1	Text fill color	160
7.110	DIMTIH system variable	161
7.110.1	Text inside align	161
7.111	DIMTIX system variable	161
7.111.1	Text inside	161
7.112	DIMTM system variable	161
7.112.1	Tolerance limit lower	161
7.113	DIMTMOVE system variable	162
7.113.1	Text movement	162
7.114	DIMTOFL system variable	162
7.114.1	Dim line forced	162
7.115	DIMTOH system variable	162
7.115.1	Text outside align	162
7.116	DIMTOL system variable	163
7.116.1	Tolerance display	163
7.117	DIMTOLJ system variable	163
7.117.1	Tolerance pos vert	163
7.118	DIMTP system variable	164
7.118.1	Tolerance limit upper	164
7.119	DIMTSZ system variable	164
7.119.1	Dim tick size	164
7.120	DIMTVP system variable	164
7.120.1	Text offset vert	164
7.121	DIMTXSTY system variable	165
7.121.1	Text style	165
7.122	DIMTXT system variable	165
7.122.1	Text height	165
7.123	DIMXTDIRECTION system variable	165
7.123.1	Text direction	165
7.124	DIMTZIN system variable	165
7.124.1	Tolerance suppress zeros	165
7.125	DIMUNIT system variable	166
7.125.1	Dim unit type (Obsolete)	166
7.126	DIMUPT system variable	166
7.126.1	Place text manually	166
7.127	DIMZIN system variable	167
7.127.1	Suppress dim zeros	167
7.128	DISPLAYAXES system variable	167
7.128.1	Display Axes	167
7.129	DISPLAYSCALING system variable	168
7.129.1	Automatic display scaling	168
7.130	DISPLAYSIDESANDENDS system variable	168
7.130.1	Display sides and ends	168
7.131	DISPLAYSNAPMARKERINALLVIEWS system variable	169
7.131.1	Snap marker in all views	169
7.132	DISPLAYTOOLTIPS system variable	169
7.132.1	Snap tooltips	169



# Indice

7.133	DISPPAPERBKG system variable	169
7.133.1	Paper background	169
7.134	DISPPAPERMARGINS system variable	170
7.134.1	Printable area	170
7.135	DISPSILH system variable	170
7.135.1	Display silhouette curves	170
7.136	DISTANCE system variable	171
7.136.1	Distance	171
7.137	DMAUDITLEVEL system variable	171
7.137.1	DMAUDIT command, level of details	171
7.138	DMAUTOUPDATE system variable	171
7.138.1	3D constraints recalculation mode	171
7.139	DMCONNECTIONCUTTYPE system variable	172
7.139.1	Connection type	172
7.140	DMEXTRUDEMODE system variable	172
7.140.1	Extrude mode	172
7.141	DMPUSHPULLSUBTRACT system variable	173
7.141.1	DMPUSHPULL subtract	173
7.142	DMRECOGNIZE system variable	173
7.142.1	Automatic 3D geometry constraints recognition	173
7.143	DOCKPRIORITY system variable	174
7.143.1	Docking Priority	174
7.144	DOCTABPOSITION system variable	175
7.144.1	Tabs position	175
7.145	DONUTID system variable	175
7.145.1	Donut inside diameter	175
7.146	DONUTOD system variable	175
7.146.1	Donut outside diameter	175
7.147	DRAGMODE system variable	176
7.147.1	Entity dragging	176
7.148	DRAGMODEHIDE system variable	176
7.148.1	Hide original entity when dragging	176
7.149	DRAGMODEINTERRUPT system variable	176
7.149.1	Dragging interruption mode	176
7.150	DRAGOPEN system variable	177
7.150.1	Drag open	177
7.151	DRAGP1 system variable	177
7.151.1	Regen-drag rate	177
7.152	DRAGP2 system variable	178
7.152.1	Fast-drag rate	178
7.153	DRAGSNAP system variable	178
7.153.1	Snap dragged entities	178
7.154	DRAWINGPATH system variable	178
7.154.1	Drawings path	178
7.155	DRAWINGVIEWPRESET system variable	179
7.155.1	Drawing view preset	179
7.156	DRAWINGVIEWPRESETHIDDEN system variable	179
7.156.1	Drawing view hidden lines preset	179



# Indice

7.157	DRAWINGVIEWPRESETSCALE system variable	179
7.157.1	Scale for drawing view preset	179
7.158	DRAWINGVIEWPRESETTANGENT system variable	180
7.158.1	Drawing view tangent lines preset	180
7.159	DRAWINGVIEWPRESETTRAILING system variable	180
7.159.1	Drawing view trailing lines preset	180
7.160	DRAWINGVIEWQUALITY system variable	180
7.160.1	Quality of drawing views	180
7.161	DRAWORDERCTL system variable	181
7.161.1	Draworder control	181
7.162	DWFFORMAT system variable	181
7.162.1	Default DWF format	181
7.163	DWFFRAME system variable	182
7.163.1	DWF frame	182
7.164	DWFOSNAP system variable	182
7.164.1	Dwf entity snap	182
7.165	DWFVERSION system variable	183
7.165.1	DWF version	183
7.166	DWGCHECK system variable	183
7.166.1	Drawing check	183
7.167	DWGCODEPAGE system variable	184
7.167.1	Drawing codepage	184
7.168	DWGNAME system variable	184
7.168.1	Drawing name	184
7.169	DWGPREFIX system variable	184
7.169.1	Drawing prefix	184
7.170	DWGTITLED system variable	184
7.170.1	Drawing titled	184
7.171	DXEVAL system variable	185
7.171.1	Data extraction update mode	185
7.172	DXFTEXTADJUSTALIGNMENT system variable	185
7.172.1	Dxf text adjust alignment	185
7.173	DYNCONSTRAINTMODE system variable	186
7.173.1	Dynamic Constraint Mode	186
7.174	DYNDIGRIP system variable	186
7.174.1	Show dynamic dimensions	186
7.175	DYNDIMAPERTURE system variable	187
7.175.1	Dynamic dimension aperture	187
7.176	DYNDIMCOLORHOT system variable	187
7.176.1	Dynamic dimension hot color	187
7.177	DYNDIMCOLORHOVER system variable	187
7.177.1	Dynamic dimension hover color	187
7.178	DYNDIMDISTANCE system variable	188
7.178.1	Dynamic dimension distance	188
7.179	DYNDIMLINETYPE system variable	188
7.179.1	Dynamic dimension linetype	188
7.180	DYNDIVIS system variable	189
7.180.1	Dynamic dimension visibility	189



# Indice

7.181	DYNINPUTTRANSPARENCY system variable	189
7.181.1	Transparency of dynamic input fields	189
7.182	DYNMODE system variable	190
7.182.1	Dynamic input mode	190
7.183	DYNPICOORDS system variable	190
7.183.1	Default mode for dynamic coordinates input	190
8.	E	191
8.1	EDGEMODE system variable	191
8.1.1	Edge mode	191
8.2	ELEVATION system variable	191
8.2.1	Elevation	191
8.3	ENABLEATTRACTION system variable	192
8.3.1	Grips attraction	192
8.4	ENABLEHYPERLINKMENU system variable	192
8.4.1	Hyperlink menu	192
8.5	ENABLEHYPERLINKTOOLTIP system variable	192
8.5.1	Hyperlink tooltip	192
8.6	ERRNO system variable	193
8.6.1	Error number	193
8.7	EXPERT system variable	193
8.7.1	Expert	193
8.8	EXPINSALIGN system variable	194
8.8.1	Explorer Insert Aligned	194
8.9	EXPINSANGLE system variable	194
8.9.1	Explorer Insert Angle	194
8.10	EXPINSFIXANGLE system variable	194
8.10.1	Explorer Insert Fix Angle	194
8.11	EXPINSFIXSCALE system variable	195
8.11.1	Explorer Insert Fix Scale	195
8.12	EXPINSSCALE system variable	195
8.12.1	Explorer Insert Scale	195
8.13	EXPLMODE system variable	195
8.13.1	Explode mode	195
8.14	EXPORTACISFORMATVERSION system variable	196
8.14.1	ACIS export format version	196
8.15	EXPORTMODELSPACE system variable	196
8.15.1	Export model space	196
8.16	EXPORTPAGESETUP system variable	197
8.16.1	Export page setup	197
8.17	EXPORTPAPERSPACE system variable	197
8.17.1	Export paper space	197
8.18	EXTMAX system variable	198
8.18.1	Extents maximum	198
8.19	EXTMIN system variable	198
8.19.1	Extents minimum	198
8.20	EXTNAMES system variable	198
8.20.1	Extend names	198



# Indice

9.	F	199
9.1	FACETRATIO system variable	199
9.1.1	Faceting aspect ratio	199
9.2	FACETRES system variable	199
9.2.1	Facet resolution	199
9.3	FBXEXPORTCAMERAS system variable	199
9.3.1	Fbx Export Cameras	199
9.4	FBXEXPORTENTITIES system variable	200
9.4.1	Fbx Export Entities	200
9.5	FBXEXPORTENTITIESSELTYPE system variable	200
9.5.1	Fbx entities to export	200
9.6	FBXEXPORTLIGHTS system variable	201
9.6.1	Fbx Export Lights	201
9.7	FBXEXPORTMATERIALS system variable	201
9.7.1	Fbx Export Materials	201
9.8	FBXEXPORTTEXTURES system variable	201
9.8.1	Fbx Export Textures	201
9.9	FBXEXPORTTEXTURESPATH system variable	202
9.9.1	FBX Export Textures path	202
9.10	FEATURECOLORS system variable	202
9.10.1	Feature colors	202
9.11	FIELDDISPLAY system variable	202
9.11.1	Field display	202
9.12	FIELDEVAL system variable	203
9.12.1	Field update mode	203
9.13	FILEDIA system variable	203
9.13.1	File dialog	203
9.14	FILLETRAD system variable	204
9.14.1	Fillet radius	204
9.15	FILLMODE system variable	204
9.15.1	Fill mode	204
9.16	FLOORTOFLOORDISTANCE system variable	204
9.16.1	Floor to floor distance	204
9.17	FONTALT system variable	205
9.17.1	Alternate font	205
9.18	FONTPMAP system variable	205
9.18.1	Font mapping file	205
9.19	FRAME system variable	205
9.19.1	Frame	205
9.20	FRAMESELECTION system variable	206
9.20.1	Frame selection	206
9.21	FRONTZ system variable	206
9.21.1	Front clipping plane offset	206
9.22	FULLOPEN system variable	206
9.22.1	Full open	206
10.	G	207
10.1	GENERATEASSOCATTRS system variable	207
10.1.1	Generate associative attributes	207



# Indice

10.2	GENERATEASSOCVIEWS system variable	207
10.2.1	Generate associative drawings	207
10.3	GEOLATLONGFORMAT system variable	207
10.3.1	Geographic latitude/longitude format	207
10.4	GEOMARKERVISIBILITY system variable	208
10.4.1	Geographic marker visibility	208
10.5	GEOMRELATIONS system variable	208
10.5.1	Geometric relationship indication	208
10.6	GETSTARTED system variable	209
10.6.1	Get Started	209
10.7	GFANG system variable	209
10.7.1	Gradient fill angle	209
10.8	GFCLR1 system variable	209
10.8.1	Gradient fill primary color	209
10.9	GFCLR2 system variable	209
10.9.1	Gradient fill secondary color	209
10.10	GFCLRLUM system variable	210
10.10.1	Gradient fill tint level	210
10.11	GFCLRSTATE system variable	210
10.11.1	Number of colors for a gradient fill	210
10.12	GFNAME system variable	210
10.12.1	Gradient fill name	210
10.13	GFSHIFT system variable	211
10.13.1	Gradient fill shift	211
10.14	GLSWAPMODE system variable	211
10.14.1	GL Swap Mode	211
10.15	GRADIENTCOLORBOTTOM system variable	212
10.15.1	Background gradient color bottom	212
10.16	GRADIENTCOLORMIDDLE system variable	212
10.16.1	Background gradient color middle	212
10.17	GRADIENTCOLORTOP system variable	212
10.17.1	Background gradient color top	212
10.18	GRADIENTMODE system variable	213
10.18.1	Background gradient mode	213
10.19	GRIDAXISCOLOR system variable	213
10.19.1	Grid axis color	213
10.20	GRIDDISPLAY system variable	214
10.20.1	Grid display	214
10.21	GRIDMAJOR system variable	214
10.21.1	Grid major	214
10.22	GRIDMAJORCOLOR system variable	214
10.22.1	Grid major color	214
10.23	GRIDMINORCOLOR system variable	215
10.23.1	Grid minor color	215
10.24	GRIDMODE system variable	215
10.24.1	Grid mode	215
10.25	GRIDSTYLE system variable	215
10.25.1	Grid style	215



# Indice

10.26	GRIDUNIT system variable	216
10.26.1	Grid unit	216
10.27	GRIDXYZTINT system variable	216
10.27.1	Grid XYZ tint	216
10.28	GRIPBLOCK system variable	217
10.28.1	Grips in blocks	217
10.29	GRIPCOLOR system variable	217
10.29.1	Grip color	217
10.30	GRIPDYNCOLOR system variable	217
10.30.1	Dynamic grip color	217
10.31	GRIPHOT system variable	218
10.31.1	Selected grip color	218
10.32	GRIPHOVER system variable	218
10.32.1	Hover grip color	218
10.33	GRIPOBJLIMIT system variable	218
10.33.1	Grip object limit	218
10.34	GRIPS system variable	219
10.34.1	Grips	219
10.35	GRIPSIZE system variable	219
10.35.1	Grip size	219
10.36	GRIPTIPS system variable	219
10.36.1	Grip tips	219
10.37	GSDEVICETYPE2D system variable	220
10.37.1	2D graphic system device	220
10.38	GSDEVICETYPE3D system variable	220
10.38.1	3D graphic system device	220
11.	H	222
11.1	HALOGAP system variable	222
11.1.1	Halo gap	222
11.2	HANDLES system variable	222
11.2.1	Publish Handles	222
11.3	HANDSEED system variable	222
11.3.1	Handle seed	222
11.4	HIDEPRECISION system variable	223
11.4.1	Hide and shade precision	223
11.5	HIDESYSTEMPRINTERS system variable	223
11.5.1	Hide system printers	223
11.6	HIDETEXT system variable	223
11.6.1	Hide text on HIDE	223
11.7	HIDEXREFSCALES system variable	224
11.7.1	Hide xref scales	224
11.8	HIGHLIGHT system variable	224
11.8.1	Highlight	224
11.9	HIGHLIGHTCOLOR system variable	224
11.9.1	Selection Highlight Color	224
11.10	HIGHLIGHTEFFECT system variable	225
11.10.1	Selection Highlight Style	225
11.11	HORIZONBKG_ENABLE system variable	225



# Indice

11.11.1	Horizon background	225
11.12	HORIZONBKG_GROUNDHORIZON system variable	226
11.12.1	Ground horizon	226
11.13	HORIZONBKG_GROUNDORIGIN system variable	226
11.13.1	Ground origin	226
11.14	HORIZONBKG_SKYHIGH system variable	226
11.14.1	Sky high	226
11.15	HORIZONBKG_SKYHORIZON system variable	226
11.15.1	Sky horizon	226
11.16	HORIZONBKG_SKYLOW system variable	227
11.16.1	Sky low	227
11.17	HOTKEYASSISTANT system variable	227
11.17.1	Hotkey Assistant	227
11.18	HPANG system variable	227
11.18.1	Hatch pattern angle	227
11.19	HPANNOTATIVE system variable	228
11.19.1	Hatch pattern annotative	228
11.20	HPASSOC system variable	228
11.20.1	Hatch pattern associativity	228
11.21	HPBACKGROUNDCOLOR system variable	228
11.21.1	Hatch background default color	228
11.22	HPBOUND system variable	229
11.22.1	Hatch pattern boundary	229
11.23	HPBOUNDRETAIN system variable	229
11.23.1	Hatch pattern boundary retain	229
11.24	HPCOLOR system variable	229
11.24.1	Hatch default color	229
11.25	HPDOUBLE system variable	230
11.25.1	Hatch pattern doubling	230
11.26	HPDRAWORDER system variable	230
11.26.1	Hatch pattern draw order	230
11.27	HPGAPTOL system variable	230
11.27.1	Hatch pattern gap tolerance	230
11.28	HPISLANDDETECTION system variable	231
11.28.1	Hatch pattern island detection	231
11.29	HPLAYER system variable	231
11.29.1	Default layer for new hatches	231
11.30	HPLINETYPE system variable	232
11.30.1	Hatch pattern linetype	232
11.31	HPMAXAREAS system variable	232
11.31.1	Fill mode for sparse hatches	232
11.32	HPNAME system variable	232
11.32.1	Hatch pattern name	232
11.33	HPOBJWARNING system variable	233
11.33.1	Hatch pattern object warning	233
11.34	HPORIGIN system variable	233
11.34.1	Hatch pattern origin	233
11.35	HPSCALE system variable	233



# Indice

11.35.1	Hatch pattern scale	233
11.36	HPSEPARATE system variable	234
11.36.1	Hatch pattern separate	234
11.37	HPSPACE system variable	234
11.37.1	Hatch pattern spacing	234
11.38	HPTRANSPARENCY system variable	234
11.38.1	Default transparency for new hatches	234
11.39	HYPERLINKBASE system variable	235
11.39.1	Hyperlink base	235
12.	I	236
12.1	IMAGECACHEFOLDER system variable	236
12.1.1	Image disk cache folder	236
12.2	IMAGECACHEMAXMEMORY system variable	236
12.2.1	Maximum used memory	236
12.3	IMAGEDISKCACHE system variable	236
12.3.1	Image disk cache	236
12.4	IMAGEFRAME system variable	237
12.4.1	Image frame	237
12.5	IMAGEHLT system variable	237
12.5.1	Image highlight	237
12.6	IMAGENOTIFY system variable	237
12.6.1	Image notify	237
12.7	IMPORTCUIFILEEXISTS system variable	238
12.7.1	Import cui file exists	238
12.8	IMPORTPRODUCTSTRUCTURE system variable	238
12.8.1	Product structure	238
12.9	IMPORTREPAIR system variable	239
12.9.1	Repair model on import	239
12.10	INCLUDEPLOTTSTAMP system variable	239
12.10.1	Include Plot Stamp	239
12.11	INDEXCTL system variable	239
12.11.1	Index control	239
12.12	INETLOCATION system variable	240
12.12.1	Internet location	240
12.13	INSBASE system variable	240
12.13.1	Insertion base point	240
12.14	INSNAME system variable	240
12.14.1	Insertion name	240
12.15	INSUNITS system variable	241
12.15.1	Insertion units	241
12.16	INSUNITSDEFSOURCE system variable	242
12.16.1	Insertion units default source	242
12.17	INSUNITSDEFTARGET system variable	242
12.17.1	Insertion units default target	242
12.18	INSUNITSSCALING system variable	243
12.18.1	Insertion units scaling	243
12.19	INTERFERECOLOR system variable	244
12.19.1	Interference color	244



# Indice

12.20	INTERFERELAYER system variable	244
12.20.1	Interference layer	244
12.21	INTERFEREOBJVS system variable	244
12.21.1	Interference object visual style	244
12.22	INTERFEREVPVS system variable	245
12.22.1	Interference viewport visual style	245
12.23	INTERSECTIONCOLOR system variable	245
12.23.1	Intersection color	245
12.24	INTERSECTIONDISPLAY system variable	245
12.24.1	Intersection display	245
12.25	ISAVEBAK system variable	246
12.25.1	Incremental save backup	246
12.26	ISAVEPERCENT system variable	246
12.26.1	Save percent	246
12.27	ISOLINES system variable	247
12.27.1	Isolines	247
13.	L	248
13.1	LASTANGLE system variable	248
13.1.1	Last angle	248
13.2	LASTPOINT system variable	248
13.2.1	Last point	248
13.3	LASTPROMPT system variable	248
13.3.1	Last prompt	248
13.4	LATITUDE system variable	248
13.4.1	Latitude	248
13.5	LAYERFILTEREXCESS system variable	249
13.5.1	Layer Filter Excess	249
13.6	LAYERPMODE system variable	249
13.6.1	Layer previous mode	249
13.7	LAYLOCKFADECTL system variable	250
13.7.1	Locked layer fade control	250
13.8	LAYOUTREGENCTL system variable	250
13.8.1	Layout regeneration control	250
13.9	LAYOUTTAB system variable	250
13.9.1	Layout and model tabs	250
13.10	LEGACYCODESEARCH system variable	251
13.10.1	Legacy code search mode	251
13.11	LENGTHUNITS system variable	251
13.11.1	Length units	251
13.12	LENSLENGTH system variable	251
13.12.1	Lens length	251
13.13	LEVELOFLDETAIL system variable	252
13.13.1	Length units	252
13.14	LICFLAGS system variable	252
13.14.1	Licensed components	252
13.15	LIGHTGLYPHCOLOR system variable	253
13.15.1	Color for light glyph	253
13.16	LIGHTGLYPHDISPLAY system variable	253



# Indice

13.16.1	Light glyph display	253
13.17	LIGHTINGUNITS system variable	253
13.17.1	Lighting units	253
13.18	LIGHTWEBGLYPHCOLOR system variable	254
13.18.1	Color for web light glyph	254
13.19	LIMCHECK system variable	254
13.19.1	Limits check	254
13.20	LIMMAX system variable	255
13.20.1	Limits maximum	255
13.21	LIMMIN system variable	255
13.21.1	Limits minimum	255
13.22	LINEARBRIGHTNESS system variable	255
13.22.1	Linear brightness	255
13.23	LINEARCONTRAST system variable	256
13.23.1	Linear contrast	256
13.24	LISPINIT system variable	256
13.24.1	LISP init	256
13.25	LOADMECHANICAL2D system variable	256
13.25.1	Mechanical 2D enablers	256
13.26	LOCALE system variable	257
13.26.1	Locale	257
13.27	LOCALROOTPREFIX system variable	257
13.27.1	Local root prefix	257
13.28	LOCKUI system variable	257
13.28.1	Lock user interface elements	257
13.29	LOFTANG1 system variable	258
13.29.1	Loft angle 1	258
13.30	LOFTANG2 system variable	259
13.30.1	Loft angle 2	259
13.31	LOFTMAG1 system variable	260
13.31.1	Loft magnitude 1	260
13.32	LOFTMAG2 system variable	260
13.32.1	Loft magnitude 2	260
13.33	LOFTNORMALS system variable	261
13.33.1	Loft normals	261
13.34	LOFTPARAM system variable	261
13.34.1	Loft param	261
13.35	LOGFILEMODE system variable	262
13.35.1	Log file mode	262
13.36	LOGFILENAME system variable	262
13.36.1	Log file name	262
13.37	LOGFILEPATH system variable	262
13.37.1	Log file path	262
13.38	LOGGEDIN system variable	263
13.38.1	Logged in	263
13.39	LOGINNAME system variable	263
13.39.1	Login name	263
13.40	LONGITUDE system variable	263



# Indice

13.40.1	Longitude	263
13.41	LOOKFROMDIRECTIONMODE system variable	264
13.41.1	LookFrom direction mode	264
13.42	LOOKFROMFEEDBACK system variable	264
13.42.1	LookFrom feedback	264
13.43	LOOKFROMZOOMEXTENTS system variable	265
13.43.1	LookFrom zoom extents	265
13.44	LTGAPSELECTION system variable	265
13.44.1	Linetype gap selection	265
13.45	LTSCALE system variable	265
13.45.1	Linetype scale	265
13.46	LUNITS system variable	266
13.46.1	Linear unit type	266
13.47	LUPREC system variable	266
13.47.1	Linear unit precision	266
13.48	LWDEFAULT system variable	267
13.48.1	Default linewidth	267
13.49	LWDISPLAY system variable	267
13.49.1	Lineweight display	267
13.50	LWDISPSCALE system variable	268
13.50.1	Lineweight display scale	268
13.51	LWUNITS system variable	268
13.51.1	Lineweight units	268
14.	M	269
14.1	MACROREC system variable	269
14.1.1	Macro recording	269
14.2	MACROTRACE system variable	269
14.2.1	Macro trace	269
14.3	MAKEBAK system variable	269
14.3.1	Make backup (Obsolete)	269
14.4	MANIPULATOR system variable	270
14.4.1	Manipulator	270
14.5	MANIPULATORCOLORTHEME system variable	270
14.5.1	Color theme of Manipulator	270
14.6	MANIPULATORDURATION system variable	271
14.6.1	Manipulator duration	271
14.7	MANIPULATORHANDLE system variable	271
14.7.1	Manipulator handle	271
14.8	MANIPULATORSIZE system variable	272
14.8.1	Size of Manipulator	272
14.9	MASSPREC system variable	272
14.9.1	Mass precision	272
14.10	MASSPROPACCURACY system variable	273
14.10.1	Mass properties calculation relative accuracy	273
14.11	MASSUNITS system variable	274
14.11.1	Mass units	274
14.12	MAXACTVP system variable	274
14.12.1	Maximum active viewports	274



# Indice

14.13	MAXHATCH system variable	274
14.13.1	Maximum hatch dashes	274
14.14	MAXSORT system variable	275
14.14.1	Maximum sort	275
14.15	MAXTHREADS system variable	275
14.15.1	Maximum number of threads	275
14.16	MBSTATE system variable	275
14.16.1	Mechanical browser state	275
14.17	MBUTTONPAN system variable	276
14.17.1	Middle button pan	276
14.18	MEASUREINIT system variable	276
14.18.1	Measurement initial	276
14.19	MEASUREMENT system variable	277
14.19.1	Measurement	277
14.20	MECH2DSAVEFORMAT system variable	277
14.20.1	Mechanical 2D save format	277
14.21	MENUBAR (EXCEPT OS X) system variable	278
14.21.1	Menu bar	278
14.22	MENUCTL system variable	278
14.22.1	Menu control	278
14.23	MENUCHO system variable	278
14.23.1	Menu echo	278
14.24	MENUNAME system variable	279
14.24.1	Menu name	279
14.25	MESHTYPE system variable	279
14.25.1	Mesh type	279
14.26	MIDDLECLICKCLOSE system variable	279
14.26.1	Middle click close (Mac & Linux)	279
14.27	MILLISECS system variable	280
14.27.1	Milliseconds	280
14.28	MIRRTEXT system variable	280
14.28.1	Mirror text	280
14.29	MLEADERSCALE system variable	281
14.29.1	Multileader scale	281
14.30	MODEMACRO system variable	281
14.30.1	Mode macro	281
14.31	MSLTSCALE system variable	281
14.31.1	Model space linetype scale	281
14.32	MSOLESCALE system variable	282
14.32.1	Model space OLE scale	282
14.33	MTEXTCOLUMN system variable	282
14.33.1	Multiline text column setting	282
14.34	MTEXTDETECTSPACE system variable	282
14.34.1	Space detection for creating lists in mtext editor	282
14.35	MTEXTED system variable	283
14.35.1	Multiline text editor	283
14.36	MTEXTFIXED system variable	283
14.36.1	Multiline text fixed	283



# Indice

14.37	MTEXTTOOLBAR system variable	283
14.37.1	MText Formatting toolbar	283
14.38	MTFLAGS system variable	284
14.38.1	Multi-Threading Flags	284
14.39	MYDOCUMENTSFOLDER system variable	284
14.39.1	MyDocuments root folder	284
14.40	MYDOCUMENTSPREFIX system variable	285
14.40.1	MyDocuments root prefix	285
14.41	MECHANICALBROWSERSETTINGS system variable	285
15.	N	286
15.1	NAVVCUBEDISPLAY system variable	286
15.1.1	LookFrom display	286
15.2	NAVVCUBELOCATION system variable	286
15.2.1	LookFrom location	286
15.3	NAVVCUBEOPACITY system variable	287
15.3.1	LookFrom opacity	287
15.4	NAVVCUBEORIENT system variable	287
15.4.1	LookFrom orientation	287
15.5	NAVVCUBESIZE system variable	287
15.5.1	LookFrom size	287
15.6	NEARESTDISTANCE system variable	288
15.6.1	Nearest Distance	288
15.7	NOMUTT system variable	289
15.7.1	No muttering	289
15.8	NORTHDIRECTION system variable	289
15.8.1	North direction	289
16.	O	290
16.1	OBJECTISOLATIONMODE system variable	290
16.1.1	Object Isolation Mode	290
16.2	OBSCUREDCOLOR system variable	290
16.2.1	Obscured color	290
16.3	OBSCUREDTYPE system variable	291
16.3.1	Obscured linetype	291
16.4	OFFSETDIST system variable	291
16.4.1	Offset distance	291
16.5	OFFSETERASE system variable	292
16.5.1	Offset erase	292
16.6	OFFSETGAPTYPE system variable	292
16.6.1	Offset gap type	292
16.7	OLEFRAME system variable	292
16.7.1	OLE frame	292
16.8	OLEHIDE system variable	293
16.8.1	OLE hide	293
16.9	OLEQUALITY system variable	293
16.9.1	OLE quality	293
16.10	OLESTARTUP system variable	294
16.10.1	OLE startup	294
16.11	OPMSTATE system variable	294



# Indice

16.11.1	Properties bar state	294
16.12	ORBITAUTOTARGET system variable	295
16.12.1	Orbit Auto Target	295
16.13	ORTHOMODE system variable	295
16.13.1	Orthogonal mode	295
16.14	OSMODE system variable	295
16.14.1	Entity snap mode	295
16.15	OSNAPCOORD system variable	296
16.15.1	Entity snap coordinates	296
16.16	OSNAPZ system variable	297
16.16.1	Ignore entity snap elevation	297
16.17	OSOPTIONS system variable	297
16.17.1	Entity snap options	297
16.18	OVERKILLAYER system variable	297
16.18.1	Duplicate Entities Layer	297
17.	P	299
17.1	PANBUFFER system variable	299
17.1.1	Pan buffer	299
17.2	PANELBUTTONSIZE system variable	299
17.2.1	Panelset icon button size	299
17.3	PAPERUPDATE system variable	299
17.3.1	Paper update	299
17.4	PARAMETERCOPYMODE system variable	300
17.4.1	Parameter copy mode	300
17.5	PARAMETRICBLOCKS2DPATH system variable	300
17.5.1	Parametric blocks 2D directory path	300
17.6	PDFCACHE system variable	301
17.6.1	PDF cache	301
17.7	PDFEMBEDDEDTTF system variable	301
17.7.1	Pdf embedded fonts	301
17.8	PDFEXPORTHYPERLINKS system variable	302
17.8.1	Export hyperlinks	302
17.9	PDFEXPORTSOLIDHATCHTYPE system variable	302
17.9.1	Export solid hatches	302
17.10	PDFFFRAME system variable	302
17.10.1	PDF frame	302
17.11	PDFHATCHTOBMPDPI system variable	303
17.11.1	Hatch to bitmap DPI	303
17.12	PDFIMAGEANTIALIAS system variable	303
17.12.1	Image anti-aliasing	303
17.13	PDFIMAGECOMPRESSION system variable	303
17.13.1	Image compression	303
17.14	PDFIMAGEDPI system variable	304
17.14.1	Image DPI	304
17.15	PDFIMPORTAPPLYLINEWEIGHT system variable	304
17.15.1	Apply linewidth properties	304
17.16	PDFIMPORTASBLOCK system variable	305
17.16.1	Import as block	305



# Indice

17.17	PDFIMPORTCONVERTSOLIDSTOHATCHES system variable	305
17.17.1	Convert solid fills to hatches	305
17.18	PDFIMPORTIMAGEPATH system variable	305
17.18.1	Raster Images Folder	305
17.19	PDFIMPORTJOINLINEANDARCSEGMENTS system variable	306
17.19.1	Join line and arc segments	306
17.20	PDFIMPORTLAYERSTYPE system variable	306
17.20.1	Layers	306
17.21	PDFIMPORTRASTERIMAGES system variable	307
17.21.1	Raster Images	307
17.22	PDFIMPORTSOLIDFILLS system variable	307
17.22.1	Solid fills	307
17.23	PDFIMPORTTRUETYPETEXT system variable	307
17.23.1	TrueType text	307
17.24	PDFIMPORTTRUETYPETEXTASGEOMETRY system variable	308
17.24.1	Import True Type text as geometry	308
17.25	PDFIMPORTUSEGEOMETRYOPTIMIZATION system variable	308
17.25.1	Import geometry with optimization	308
17.26	PDFIMPORTVECTORGEOMETRY system variable	309
17.26.1	Vector geometry	309
17.27	PDFLAYERSSETTING system variable	309
17.27.1	Pdf layer support	309
17.28	PDFLAYOUTSTOEXPORT system variable	309
17.28.1	Pdf layouts to export	309
17.29	PDFMERGECONTROL system variable	310
17.29.1	Pdf Merge Control	310
17.30	PDFNOTIFY system variable	310
17.30.1	PDF notify	310
17.31	PDFOSNAP system variable	311
17.31.1	PDF entity snap	311
17.32	PDFPAPERHEIGHT system variable	311
17.32.1	Pdf overridden paper height	311
17.33	PDFPAPERSIZE OVERRIDE system variable	311
17.33.1	Pdf papersize override	311
17.34	PDFPAPERWIDTH system variable	312
17.34.1	Pdf overridden paper width	312
17.35	PDFPRCCOMPRESSION system variable	312
17.35.1	PRC Compression	312
17.36	PDFPRCEXPORT system variable	313
17.36.1	PRC Export Mode	313
17.37	PDFPRCEXPORTPRODUCTSTRUCTUREMODE system variable	313
17.37.1	PRC Product Structure mode	313
17.38	PDFPRCSINGLEVIEWMODE system variable	313
17.38.1	PRC Single-View Mode	313
17.39	PDFRENDERDPI system variable	314
17.39.1	Render DPI	314
17.40	PDFSHXTEXTASGEOMETRY system variable	314
17.40.1	Pdf SHX text as geometry	314



# Indice

17.41	PDFSIMPLEGEOMOPTIMIZATION system variable	315
17.41.1	Pdf simple geometry optimization	315
17.42	PDFTTFTTEXTASGEOMETRY system variable	315
17.42.1	Pdf TTF text as geometry	315
17.43	PDFUSEPLOTSTYLES system variable	315
17.43.1	Pdf use plotstyles	315
17.44	PDFVECTORRESOLUTIONDPI system variable	316
17.44.1	Vector Resolution DPI	316
17.45	PDFZOOMTOEXTENTS MODE system variable	316
17.45.1	Pdf zoom to extents mode	316
17.46	PDMODE system variable	317
17.46.1	Point display mode	317
17.47	PDSIZE system variable	318
17.47.1	Point display size	318
17.48	PEDITACCEPT system variable	318
17.48.1	Polyline edit accept	318
17.49	PELLIPSE system variable	318
17.49.1	Polyline ellipse	318
17.50	PERIMETER system variable	319
17.50.1	Last perimeter	319
17.51	PERSPECTIVE system variable	319
17.51.1	Perspective	319
17.52	PFACEVMAX system variable	319
17.52.1	Polyface mesh maximum vertices	319
17.53	PHANDLE system variable	320
17.53.1	Palette handle	320
17.54	PICKADD system variable	320
17.54.1	Pick add	320
17.55	PICKAUTO system variable	321
17.55.1	Pick automatic	321
17.56	PICKBOX system variable	321
17.56.1	Pick box	321
17.57	PICKDRAG system variable	321
17.57.1	Pick drag	321
17.58	PICKFIRST system variable	322
17.58.1	Pick first	322
17.59	PICKSTYLE (EXCEPT OS X) system variable	322
17.59.1	Pick style	322
17.60	PICTUREEXPORTSCALE system variable	323
17.60.1	Picture format export scale factor	323
17.61	PLACESBARFOLDER1 system variable	323
17.61.1	First folder (Windows)	323
17.62	PLACESBARFOLDER2 system variable	324
17.62.1	Second folder (Windows)	324
17.63	PLACESBARFOLDER3 system variable	324
17.63.1	Third folder (Windows)	324
17.64	PLACESBARFOLDER4 system variable	325
17.64.1	Fourth folder (Windows)	325



# Indice

17.65	PLATFORM system variable	325
17.65.1	Platform	325
17.66	PLINECACHE system variable	326
17.66.1	Polyline cache	326
17.67	PLINECONVERTMODE system variable	326
17.67.1	Polyline convert mode	326
17.68	PLINEGEN system variable	326
17.68.1	Polyline generation	326
17.69	PLINETYPE system variable	327
17.69.1	Polyline type	327
17.70	PLINEWID system variable	328
17.70.1	Polyline width	328
17.71	PLOTCFGPATH system variable	328
17.71.1	Plotter configuration path	328
17.72	PLOTID system variable	328
17.72.1	Plot id (Obsolete)	328
17.73	PLOTOUTPUTPATH system variable	328
17.73.1	Plot output path	328
17.74	PLOTROTMODE system variable	329
17.74.1	Plot rotation mode	329
17.75	PLOTSTYLEPATH system variable	329
17.75.1	Plot styles path	329
17.76	PLOTTER system variable	329
17.76.1	Plotter (Obsolete)	329
17.77	PLOTTRANSPARENCYOVERRIDE system variable	330
17.77.1	Plot transparency override	330
17.78	PLQUIET system variable	330
17.78.1	Plot quiet	330
17.79	POINTCLOUD2DVSDISPLAY system variable	330
17.79.1	Point cloud toggle show/hide bounding box in 2D wireframe mode	330
17.80	POINTCLOUDADAPTIVEDISPLAY system variable	331
17.80.1	Point cloud toggle adaptive vs. fixed point sizes	331
17.81	POINTCLOUDBOUNDARY system variable	331
17.81.1	Point cloud point boundary	331
17.82	POINTCLOUDCACHEFOLDER system variable	332
17.82.1	Point Cloud disk cache folder	332
17.83	POINTCLOUDCACHESIZE system variable	332
17.83.1	Maximum allowed cache size on disk (Gb)	332
17.84	POINTCLOUDPOINTMAX system variable	332
17.84.1	Point cloud max points	332
17.85	POINTCLOUDPOINTSIZ system variable	333
17.85.1	Point cloud point size	333
17.86	POLARADDANG system variable	333
17.86.1	Polar add angles	333
17.87	POLARANG system variable	334
17.87.1	Polar angle	334
17.88	POLARDIST system variable	334
17.88.1	Polar distance	334



# Indice

17.89	POLARMODE system variable	334
17.89.1	Polar mode	334
17.90	POLYSIDES system variable	335
17.90.1	Polygon sides	335
17.91	POPUPS system variable	335
17.91.1	Popups	335
17.92	PREVIEW_HEIGHT system variable	335
17.92.1	Preview height	335
17.93	PREVIEW_WIDTH system variable	336
17.93.1	Preview width	336
17.94	PREVIEWDELAY system variable	336
17.94.1	Delay to preview selection	336
17.95	PREVIEWEFFECT system variable	336
17.95.1	Selection preview effect	336
17.96	PREVIEWFILTER system variable	337
17.96.1	Selection preview filter	337
17.97	PREVIEWTYPE system variable	337
17.97.1	Preview type	337
17.98	PREVIEWWNDINOPENDLG system variable	338
17.98.1	Preview window in open dialog	338
17.99	PRINTFILE system variable	338
17.99.1	Print file	338
17.100	PRINTPDFPREVIEW system variable	338
17.100.1	Print As PDF Preview	338
17.101	PRODUCT system variable	339
17.101.1	Product	339
17.102	PROGBAR system variable	339
17.102.1	Progress bar	339
17.103	PROGRAM system variable	339
17.103.1	Program	339
17.104	PROJECTIONTYPE system variable	340
17.104.1	Drawing views position scheme	340
17.105	PROJECTNAME system variable	342
17.105.1	Project name	342
17.106	PROJECTSEARCHPATHS system variable	342
17.106.1	Project search paths	342
17.107	PROJMODE system variable	342
17.107.1	Projection mode	342
17.108	PROMPTMENU system variable	343
17.108.1	Prompt menu	343
17.109	PROMPTMENUFLAGS system variable	343
17.109.1	Prompt menu flags	343
17.110	PROMPTOPTIONFORMAT system variable	344
17.110.1	Prompt option format	344
17.111	PROMPTOPTIONTRANSLATEKEYWORDS system variable	345
17.111.1	Prompt option translate keywords	345
17.112	PROPERTYPREVIEW system variable	345
17.112.1	Property preview	345



# Indice

17.113	PROPERTYPREVIEWDELAY system variable	346
17.113.1	Property Preview Delay	346
17.114	PROPERTYPREVIEWOBJLIMIT system variable	346
17.114.1	Property Preview Object Limit	346
17.115	PROPPREVTIMEOUT system variable	346
17.115.1	Property Preview Timeout	346
17.116	PROPUNITS system variable	347
17.116.1	Property units	347
17.117	PROXYGRAPHICS system variable	347
17.117.1	Proxy graphics	347
17.118	PROXYNOTICE system variable	348
17.118.1	Proxy notice	348
17.119	PROXYSHOW system variable	348
17.119.1	Proxy show	348
17.120	PROXYWEBSEARCH system variable	348
17.120.1	Proxy web search	348
17.121	PSLTSCALE system variable	349
17.121.1	Paper space linetype scale	349
17.122	PSOLHEIGHT system variable	349
17.122.1	Polysolid height	349
17.123	PSOLWIDTH system variable	350
17.123.1	Polysolid width	350
17.124	PSPROLOG system variable	350
17.124.1	Postscript prolog	350
17.125	PSQUALITY system variable	350
17.125.1	Postscript quality	350
17.126	PSTYLEMODE system variable	351
17.126.1	Plot style mode	351
17.127	PSTYLEPOLICY system variable	351
17.127.1	Plot style policy	351
17.128	PSVPSCALE system variable	351
17.128.1	Paper space viewport scale	351
17.129	PUBLISHALLSHEETS system variable	352
17.129.1	Publish all sheets	352
17.130	PUCSSBASE system variable	352
17.130.1	Paper space UCS base	352
18.	Q	353
18.1	QAFLAGS system variable	353
18.1.1	Quality Assurance flags	353
18.2	QTEXTMODE system variable	353
18.2.1	Quick text mode	353
18.3	QUADCOMMANDLAUNCH system variable	356
18.3.1	Quad default command launch	356
18.4	QUADDISPLAY system variable	356
18.4.1	Quad display	356
18.5	QUADEXPANDDELAY system variable	357
18.5.1	Quad expand delay	357
18.6	QUADEXPANDTABDELAY system variable	357



# Indice

18.6.1	Quad expand tab delay	357
18.7	QUADGOTRANSPARENT system variable	357
18.7.1	Quad go transparent	357
18.8	QUADHIDEDELAY system variable	358
18.8.1	Quad hide delay	358
18.9	QUADHIDEMARGIN system variable	358
18.9.1	Quad hide margin	358
18.10	QUADICONSIZE system variable	358
18.10.1	Quad icon size	358
18.11	QUADICONSPACE system variable	359
18.11.1	Quad icon space	359
18.12	QUADMOSTRECENTITEMS system variable	360
18.12.1	Quad most recent items	360
18.13	QUADPOPUPCORNER system variable	360
18.13.1	Quad popup corner	360
18.14	QUADROLLOVERDELAY system variable	361
18.14.1	Quad rollover delay	361
18.15	QUADSHOWDELAY system variable	361
18.15.1	Quad show delay	361
18.16	QUADWIDTH system variable	362
18.16.1	Quad width	362
19.	R	363
19.1	R12SAVEACCURACY system variable	363
19.1.1	R12 Save accuracy	363
19.2	R12SAVEDEVIATION system variable	363
19.2.1	R12 Save deviation	363
19.3	RASTERPREVIEW system variable	363
19.3.1	Raster preview	363
19.4	RE_INIT system variable	364
19.4.1	Reinitialize Aliases	364
19.5	REALTIMESPEEDUP system variable	364
19.5.1	Realtime speedup	364
19.6	REALWORLDSCALE system variable	364
19.6.1	Real world scale	364
19.7	RECENTFILES system variable	365
19.7.1	Recent file list max count	365
19.8	RECENTPATH system variable	365
19.8.1	Recent path	365
19.9	REDHILITE_DUCSLOCKED_FACE_ALPHA system variable	365
19.9.1	Face opacity	365
19.10	REDHILITE_DUCSLOCKED_FACE_COLOR system variable	366
19.10.1	Face color	366
19.11	REDHILITE_HIDDENEDGE_ALPHA system variable	366
19.11.1	Edge opacity	366
19.12	REDHILITE_HIDDENEDGE_COLOR system variable	366
19.12.1	Edge color	366
19.13	REDHILITEFULL_EDGE_ALPHA system variable	367
19.13.1	Edge opacity	367



# Indice

19.14	REDHILITEFULL_EDGE_COLOR system variable	367
19.14.1	Edge color	367
19.15	REDHILITEFULL_EDGE_SHOWHIDDEN system variable	367
19.15.1	Hidden edges	367
19.16	REDHILITEFULL_EDGE_SMOOTHING system variable	368
19.16.1	Edge smoothing	368
19.17	REDHILITEFULL_EDGE_THICKNESS system variable	368
19.17.1	Edge thickness	368
19.18	REDHILITEFULL_FACE_ALPHA system variable	369
19.18.1	Face opacity	369
19.19	REDHILITEFULL_FACE_COLOR system variable	369
19.19.1	Face color	369
19.20	REDHILITEPARTIAL_SELECTEDEDGE_ALPHA system variable	369
19.20.1	Edge opacity	369
19.21	REDHILITEPARTIAL_SELECTEDEDGE_COLOR system variable	370
19.21.1	Edge color	370
19.22	REDHILITEPARTIAL_SELECTEDEDGE_SHOWGLOW system variable	370
19.22.1	Glow	370
19.23	REDHILITEPARTIAL_SELECTEDEDGE_SMOOTHING system variable	370
19.23.1	Edge smoothing	370
19.24	REDHILITEPARTIAL_SELECTEDEDGE_THICKNESS system variable	371
19.24.1	Edge thickness	371
19.25	REDHILITEPARTIAL_SELECTEDEDGEGLOW_ALPHA system variable	371
19.25.1	Glow opacity	371
19.26	REDHILITEPARTIAL_SELECTEDEDGEGLOW_COLOR system variable	371
19.26.1	Glow color	371
19.27	REDHILITEPARTIAL_SELECTEDEDGEGLOW_SMOOTHING system variable	372
19.27.1	Glow smoothing	372
19.28	REDHILITEPARTIAL_SELECTEDEDGEGLOW_THICKNESS system variable	372
19.28.1	Glow thickness	372
19.29	REDHILITEPARTIAL_SELECTEDFACE_ALPHA system variable	373
19.29.1	Face opacity	373
19.30	REDHILITEPARTIAL_SELECTEDFACE_COLOR system variable	373
19.30.1	Face color	373
19.31	REDHILITEPARTIAL_UNSELECTEDEDGE_SHOWHIDDEN system variable	374
19.31.1	Hidden edges	374
19.32	REDSDKLINESMOOTHING system variable	374
19.32.1	Line smoothing	374
19.33	REFEDITLOCKNOTINWORKSET system variable	374
19.33.1	Refedit lock	374
19.34	REFEDITNAME system variable	375
19.34.1	Refedit name	375
19.35	REGENMODE system variable	375
19.35.1	Regeneration mode	375
19.36	REGEXPAND system variable	376
19.36.1	Registry paths expanding type	376
19.37	REMEMBERFOLDERS system variable	376
19.37.1	Remember folders	376



# Indice

19.38	RENDERCOMPOSITIONMATERIAL system variable	376
19.38.1	Render composition material	376
19.39	RENDERMATERIALDOWNLOAD system variable	377
19.39.1	Download missing resources for render materials	377
19.40	RENDERMATERIALSPATH system variable	377
19.40.1	Render materials directory path	377
19.41	RENDERUSINGHARDWARE system variable	378
19.41.1	Render using hardware	378
19.42	REPORTPANELMODE system variable	378
19.42.1	Report panel mode	378
19.43	REPOSITORYFOLDER system variable	379
19.43.1	Repository folder	379
19.44	RESTORELOSTFOCUS system variable	379
19.44.1	Restore lost focus (Linux)	379
19.45	RETINADISPLAY system variable	379
19.45.1	Retina Display	379
19.46	REVCLOUDARCSTYLE system variable	380
19.46.1	Revision cloud default arc style	380
19.47	REVCLOUDCREATEMODE system variable	380
19.47.1	Revision cloud creation mode	380
19.48	REVCLOUDGRIPS system variable	381
19.48.1	Revision cloud grips	381
19.49	REVCLOUDMAXARCLENGTH system variable	381
19.49.1	Revision cloud default maximum arc length	381
19.50	REVCLOUDMINARCLENGTH system variable	381
19.50.1	Revision cloud default minimum arc length	381
19.51	RHINOVERSION system variable	382
19.51.1	Rhino version	382
19.52	RIBBONDOCKEDHEIGHT system variable	382
19.52.1	Ribbon docked height	382
19.53	RIBBONPANELMARGIN system variable	383
19.53.1	Panel margin	383
19.54	RIBBONSTATE system variable	383
19.54.1	Ribbon state	383
19.55	RIBBONTOOLSIZE system variable	383
19.55.1	Ribbon tool size	383
19.56	ROAMABLEROOTFOLDER system variable	384
19.56.1	Roamable root folder	384
19.57	ROAMABLEROOTPREFIX system variable	384
19.57.1	Roamable root prefix	384
19.58	ROLLOVEROPACITY system variable	384
19.58.1	Rollover opacity	384
19.59	ROLLOVERSELECTIONSET system variable	385
19.59.1	Rollover selection set	385
19.60	ROLLOVERTIPS system variable	385
19.60.1	Rollover tips	385
19.61	RTDISPLAY system variable	386
19.61.1	Realtime display	386



# Indice

19.62	RTROTATIONSPEEDFACTOR system variable	386
19.62.1	Realtime Rotation Speed Factor	386
19.63	RUBBERBANDCOLOR system variable	386
19.63.1	Rubberband color	386
19.64	RUBBERBANDSTYLE system variable	387
19.64.1	Rubberband dashed style	387
19.65	RUBBERSHEET (for OS X) system variable	387
19.65.1	Rubbersheet Touchpad	387
19.66	RUBBERSHEETSENSIBILITY (FOR OS X) system variable	387
19.66.1	Rubbersheet gesture activation sensibility	387
19.67	RUNASLEVEL system variable	388
19.67.1	Run as license level	388
20.	S	389
20.1	SAFEMODE system variable	389
20.1.1	Safe mode	389
20.2	SAVECHANGETOLAYOUT system variable	389
20.2.1	Save changes to layout	389
20.3	SAVEFIDELITY system variable	389
20.3.1	Save fidelity	389
20.4	SAVEFILE system variable	390
20.4.1	Save file name	390
20.5	SAVEFILEPATH system variable	390
20.5.1	Save file path	390
20.6	SAVEFORMAT system variable	390
20.6.1	Save format	390
20.7	SAVELAYERSNAPSHOT system variable	391
20.7.1	Save Layer Snapshot with view	391
20.8	SAVENAME system variable	392
20.8.1	Saved drawing name	392
20.9	SAVEONDOCSWITCH system variable	392
20.9.1	Save on document switch	392
20.10	SAVEROUNDTRIP system variable	392
20.10.1	Save roundtrip	392
20.11	SAVETIME system variable	393
20.11.1	Save time interval	393
20.12	SCREENBOXES system variable	393
20.12.1	Screen menu boxes	393
20.13	SCREENMODE system variable	393
20.13.1	Screen mode	393
20.14	SCREENSIZE system variable	394
20.14.1	Screen size	394
20.15	SCRLHIST system variable	394
20.15.1	Scroll history	394
20.16	SDI system variable	394
20.16.1	Single-document interface (Windows)	394
20.17	SECURELOAD system variable	395
20.17.1	Executable file security policy	395
20.18	SECTIONSETTINGSSEARCHPATH system variable	395



# Indice

20.19	SELECTIONANNODISPLAY system variable	395
20.19.1	Show all annotation scales on selection	395
20.20	SELECTIONAREA system variable	396
20.20.1	Selection area	396
20.21	SELECTIONAREAOPACITY system variable	396
20.21.1	Selection area opacity	396
20.22	SELECTIONMODES system variable	396
20.22.1	Selection modes	396
20.23	SELECTIONPREVIEW system variable	397
20.23.1	Selection preview display	397
20.24	SELECTSIMILARMODE system variable	397
20.24.1	Match options for SELECTSIMILAR	397
20.25	SETBYLAYERMODE system variable	398
20.25.1	Options for SETBYLAYERMODE	398
20.26	SHADEEDGE system variable	399
20.26.1	Shading edges	399
20.27	SHADEDIF system variable	399
20.27.1	Shading diffusion	399
20.28	SHEETNUMBERLEADINGZEROES system variable	399
20.28.1	Sheet number leading zeroes	399
20.29	SHEETSETAUTOBACKUP system variable	400
20.29.1	Sheet set automatic backup	400
20.30	SHEETSETTEMPLATEPATH system variable	400
20.30.1	Sheet Set template path	400
20.31	SHORTCUTMENU system variable	401
20.31.1	Shortcut menus	401
20.32	SHORTCUTMENUDURATION system variable	401
20.32.1	Shortcut menu duration	401
20.33	SHOWDOCTABS system variable	401
20.33.1	Tabs visibility	401
20.34	SHOWFULLPATHINTITLE system variable	402
20.34.1	Display full path in title	402
20.35	SHOWLAYERUSAGE system variable	402
20.35.1	Layer Usage	402
20.36	SHOWSCROLLBUTTONS system variable	403
20.36.1	Scroll buttons	403
20.37	SHOWTABCLOSEBUTTON system variable	403
20.37.1	Close button on tabs	403
20.38	SHOWTABCLOSEBUTTONACTIVE system variable	403
20.38.1	Close button on active tab	403
20.39	SHOWTABCLOSEBUTTONALL system variable	404
20.39.1	Close button on all tabs	404
20.40	SHOWWINDOWLISTBUTTON system variable	404
20.40.1	Window list button	404
20.41	SHPNNAME system variable	404
20.41.1	Shape name	404
20.42	SINGLETONMODE system variable	405
20.42.1	Singleton mode	405



# Indice

20.43	SKETCHINC system variable	405
20.43.1	Sketch increment	405
20.44	SKPOLY system variable	405
20.44.1	Sketch poly	405
20.45	SKYSTATUS system variable	406
20.45.1	Sky status	406
20.46	SLABTHICKNESS system variable	406
20.46.1	Default slab thickness	406
20.47	SMASSEMBLYEXPORTMODE system variable	407
20.47.1	Modification of exported assemblies	407
20.48	SMASSEMBLYEXPORTREPORTPATHTYPE system variable	407
20.48.1	Report file path type	407
20.49	SMASSEMBLYEXPORTSOLIDTYPESINREPORTS system variable	408
20.49.1	Solid types in reports	408
20.50	SMATTRIBUTESLAYERCOLOR system variable	408
20.50.1	Color of the attributes layer	408
20.51	SMATTRIBUTESLAYERTEXTHEIGHT system variable	408
20.51.1	Height of the text	408
20.52	SMATTRIBUTESLAYERTEXTHEIGHTTYPE system variable	409
20.52.1	Type of the text height	409
20.53	SMBENDANNOTATIONSLAYERCOLOR system variable	409
20.53.1	Color of the bend annotations text layer	409
20.54	SMBENDANNOTATIONSLAYERTEXTHEIGHT system variable	409
20.54.1	Height of the text	409
20.55	SMBENDANNOTATIONSLAYERTEXTHEIGHTTYPE system variable	410
20.55.1	Type of the text height	410
20.56	SMBENDLINESUPPLAYERCOLOR system variable	410
20.56.1	Color of the bend up lines layer	410
20.57	SMBENDLINESUPPLAYERLINETYPE system variable	411
20.57.1	Linetype of the bend up lines layer	411
20.58	SMBENDLINESUPPLAYERLINEWEIGHT system variable	411
20.58.1	Lineweight of the bend up layer	411
20.59	SMBENDLINESDOWNPLAYERCOLOR system variable	411
20.59.1	Color of the bend down lines layer	411
20.60	SMBENDLINESDOWNPLAYERLINETYPE system variable	412
20.60.1	Linetype of the bend down lines layer	412
20.61	SMBENDLINESDOWNPLAYERLINEWEIGHT system variable	412
20.61.1	Lineweight of the bend down layer	412
20.62	SMCOLORBEND system variable	412
20.62.1	Bend relief feature color	412
20.63	SMCOLORBENDRELIEF system variable	413
20.63.1	Bend relief feature color	413
20.64	SMCOLORBEVEL system variable	413
20.64.1	Bevel feature color	413
20.65	SMCOLORCORNERRELIEF system variable	413
20.65.1	Corner relief feature color	413
20.66	SMCONTOURSLAYERLINETYPE system variable	414
20.66.1	Linetype of the contour layer	414



# Indice

20.67	SMCONTOURSLAYERLINEWEIGHT system variable	414
20.67.1	Lineweight of the contour layer	414
20.68	SMCONTOURSLAYERCOLOR system variable	414
20.68.1	Color of the contour layer	414
20.69	SMCONVERTMAXIMALBEVELANGLE system variable	415
20.69.1	Maximal angle of bevel	415
20.70	SMCONVERTMINIMALBEVELANGLE system variable	415
20.70.1	Minimal angle of bevel	415
20.71	SMCONVERTPREFERFORMFEATURES system variable	415
20.71.1	Prefer form features to flanges and bends	415
20.72	SMCONVERTPREFERHEMFEATURES system variable	416
20.72.1	Prefer hem features to flanges and bends	416
20.73	SMCONVERTPREFERZEROBENDFEATURES system variable	416
20.73.1	Prefer zero bend features to wrong bends	416
20.74	SMCONVERTRECOGNIZEHOLES system variable	417
20.74.1	Recognize holes	417
20.75	SMCONVERTRECOGNIZERIBCONTROLCURVES system variable	417
20.75.1	Recognize rib control curves	417
20.76	SMCONVERTWRONGFEATURETHICKNESSDEVIATIONTYPE system variable	417
20.76.1	Type of deviation of wrong feature thickness	417
20.77	SMCONVERTWRONGFEATURETHICKNESSDEVIATIONVALUE system variable	418
20.77.1	Deviation value of wrong feature thickness	418
20.78	SMDEFAULTKFACTOR system variable	418
20.78.1	K-Factor value	418
20.79	SMDEFAULTHREMRELATIVEBENDDEDUCTION system variable	418
20.79.1	Hem relative bend deduction value	418
20.80	SMDEFAULTFORMFEATUREUNFOLDMODE system variable	419
20.80.1	Form feature unfolding mode	419
20.81	SMDEFAULTBENDLINEEXTENTTYPE system variable	419
20.81.1	Bend line extent type	419
20.82	SMDEFAULTBENDLINEEXTENTVALUE system variable	420
20.82.1	Bend line extent value	420
20.83	SMDEFAULTBEVELFEATUREUNFOLDMODE system variable	420
20.83.1	Bevel unfolding mode	420
20.84	SMEXPORTOSMAPPROXIMATIONACCURACY system variable	421
20.85	SMEXPORTOSMMINIMALEGELENGTH system variable	421
20.86	SMFORMFEATURESUPCOLOR system variable	421
20.86.1	Color of the form features up layer	421
20.87	SMFORMFEATURESUPPLAYERLINETYPE system variable	421
20.87.1	Linetype of the form features up layer	421
20.88	SMFORMFEATURESDOWNCOLOR system variable	421
20.88.1	Color of the form features down layer	421
20.89	SMFORMFEATURESUPPLAYERLINEWEIGHT system variable	422
20.89.1	Lineweight of the form features up layer	422
20.90	SMFORMFEATURESDOWNPLAYERLINETYPE system variable	422
20.90.1	Linetype of the form features down layer	422
20.91	SMFORMFEATURESDOWNPLAYERLINEWEIGHT system variable	422
20.91.1	Lineweight of the form features down layer	422



# Indice

20.92	SMJUNCTIONCREATEHEALCOINCIDENT system variable	423
20.92.1	Heal coincident junction faces	423
20.93	SMOOTHMESHCONVERT system variable	423
20.93.1	Mesh conversion mode	423
20.94	SMPARAMETRIZEHOLESPARAMETRIZATION system variable	423
20.94.1	Hole parametrization	423
20.95	SMREPAIRLOFTEDBENDMERGE system variable	424
20.95.1	Merge lofted bends	424
20.96	SMSMARTFEATURES system variable	424
20.96.1	Automatically update sheet metal features	424
20.97	SMSPLITAMBIGUOUSINPUT system variable	425
20.97.1	Ambiguous input behavior	425
20.98	SMSPLITCONVERTBENDTOJUNCTION system variable	425
20.98.1	Convert bend to junction	425
20.99	SMSPLITHEALCOINCIDENT system variable	425
20.99.1	Heal coincident miter faces	425
20.100	SMSPLITORTHOGONALBENDSPLIT system variable	426
20.100.1	Orthogonal bend split	426
20.101	SMTARGETCAM system variable	426
20.101.1	Target CAM	426
20.102	SMOVERALLANNOTATIONSLAYERCOLOR system variable	426
20.102.1	Color of the overall dimensions annotations layer	426
20.103	SMOVERALLANNOTATIONSLAYERLINETYPE system variable	427
20.103.1	Linetype of the overall annotation layer	427
20.104	SMOVERALLANNOTATIONSLAYERLINEWEIGHT system variable	427
20.104.1	Lineweight of the overall annotation layer	427
20.105	SMBEVELFEATURECOLOR system variable	427
20.105.1	Color of the bevel features layer	427
20.106	SNAPANG system variable	428
20.106.1	Snap angle	428
20.107	SNAPBASE system variable	428
20.107.1	Snap base	428
20.108	SNAPCOLOR system variable	428
20.108.1	Snap color (Obsolete)	428
20.109	SNAPISOPAIR system variable	429
20.109.1	Snap isometric pair	429
20.110	SNAPMARKERCOLOR system variable	429
20.110.1	Snap marker color	429
20.111	SNAPMARKERSIZE system variable	430
20.111.1	Snap marker size	430
20.112	SNAPMARKERTHICKNESS system variable	430
20.112.1	Snap marker thickness	430
20.113	SNAPMODE system variable	430
20.113.1	Snap mode	430
20.114	SNAPSIZEx system variable	431
20.114.1	Snap size (Obsolete)	431
20.115	SNAPSTYL system variable	431
20.115.1	Snap style	431



# Indice

20.116	SNAPTHICKNESS system variable	431
20.116.1	Snap thickness (Obsolete)	431
20.117	SNAPTYPE system variable	432
20.117.1	Snap type	432
20.118	SNAPUNIT system variable	432
20.118.1	Snap unit	432
20.119	SOLIDCHECK system variable	432
20.119.1	Solid check	432
20.120	SORTENTS system variable	433
20.120.1	Sort entities	433
20.121	SPAADJUSTMODE system variable	433
20.121.1	Adjust mode	433
20.122	SPACHECKLEVEL system variable	434
20.122.1	Check level	434
20.123	SPAGRIDASPECTRATIO system variable	435
20.123.1	Grid aspect ratio	435
20.124	SPAGRIDMODE system variable	435
20.124.1	Grid mode	435
20.125	SPAMAXFACETEDGELENGTH system variable	435
20.125.1	Maximum facet edge length	435
20.126	SPAMAXNUMGRIDLINES system variable	436
20.126.1	Maximum number of grid lines	436
20.127	SPAMINUGRIDLINES system variable	436
20.127.1	Minimum number of U grid lines	436
20.128	SPAMINVGRIDLINES system variable	436
20.128.1	Minimum number of V grid lines	436
20.129	SPANORMALTOL system variable	437
20.129.1	Normal tolerance	437
20.130	SPASURFACETOL system variable	437
20.130.1	Surface tolerance	437
20.131	SPATRIANGMODE system variable	438
20.131.1	Triangulation mode	438
20.132	SPAUSEFACETRES system variable	438
20.132.1	Use FACETRES system variable	438
20.133	SPLFRAME system variable	438
20.133.1	Spline frame	438
20.134	SPLINESEGS system variable	439
20.134.1	Spline segments	439
20.135	SPLINETYPE system variable	439
20.135.1	Spline type	439
20.136	SRCHPATH system variable	440
20.136.1	Support file search path	440
20.137	SSFOUND system variable	440
20.137.1	Sheet set found	440
20.138	SSLOCATE system variable	440
20.138.1	Sheet set locate	440
20.139	SSMAUTOOPEN system variable	441
20.139.1	Sheet set manager auto open	441



# Indice

20.140	SSMPOLLTIME system variable	441
20.140.1	Sheet set manager poll time	441
20.141	SSMSHEETSTATUS system variable	441
20.141.1	Sheet set manager status	441
20.142	SSMSTATE system variable	442
20.142.1	Sheet set manager state	442
20.143	STACKPANELTYPE system variable	442
20.143.1	Stack panel type	442
20.144	STAMPFONTSIZE system variable	443
20.144.1	Font Size	443
20.145	STAMPFONTSTYLE system variable	443
20.145.1	Font Style	443
20.146	STAMPFOOTER system variable	443
20.146.1	Footer	443
20.147	STAMPFOOTEROFFSETX system variable	444
20.147.1	Stamp footer X offset	444
20.148	STAMPFOOTEROFFSETY system variable	444
20.148.1	Stamp footer Y offset	444
20.149	STAMPHEADER system variable	444
20.149.1	Header	444
20.150	STAMPHEADEROFFSETX system variable	444
20.150.1	Stamp header X offset	444
20.151	STAMPHEADEROFFSETY system variable	445
20.151.1	Stamp header Y offset	445
20.152	STAMPUNITS system variable	445
20.152.1	Units	445
20.153	STARTUP system variable	445
20.153.1	Startup	445
20.154	STARTUPTODAY system variable	446
20.154.1	Startup today (Obsolete)	446
20.155	STATUSBAR system variable	446
20.155.1	Window status bar	446
20.156	STEPSIZE system variable	447
20.156.1	Step size	447
20.157	STEPSPERSEC system variable	447
20.157.1	Steps per second	447
20.158	STLPOSITIVEQUADRANT system variable	447
20.158.1	STL export coordinates adjustment	447
20.159	STRUCTUREDISPLAYMODE system variable	448
20.159.1	Structure Display Mode	448
20.160	STRUCTURETREECONFIG system variable	448
20.160.1	Structure Tree Configuration	448
20.161	SURFTAB1 system variable	448
20.161.1	Surface tabulation 1	448
20.162	SURFTAB2 system variable	449
20.162.1	Surface tabulation 2	449
20.163	SURFTYPE system variable	449
20.163.1	Surface-fitting type	449



# Indice

20.164	SURFU system variable	449
20.164.1	Surface U	449
20.165	SURFV system variable	450
20.165.1	Surface V	450
20.166	SVGBLENDEDGRADIENTS system variable	450
20.166.1	Svg Blended Gradients	450
20.167	SVGDEFAULTIMAGEEXTENSION system variable	450
20.167.1	Svg Default Image Extension	450
20.168	SVGGENERICFONTFAMILY system variable	451
20.168.1	Svg Generic Font Family	451
20.169	SVGIMAGEBASE system variable	451
20.169.1	Svg Image base path	451
20.170	SVGIMAGEURL system variable	452
20.170.1	Svg Image Url	452
20.171	SVGLINEWEIGHTSCALE system variable	452
20.171.1	Svg Line Weight Scale	452
20.172	SVGOUPUTHEIGHT system variable	452
20.172.1	Svg Output Height (in pixels)	452
20.173	SVGOUPUTWIDTH system variable	452
20.173.1	Svg Output Width (in pixels)	452
20.174	SVGPRECISION system variable	453
20.174.1	Svg Floating Point Precision	453
20.175	SVGSCALEFACTOR system variable	453
20.175.1	Svg Scale Factor	453
20.176	SYSCODEPAGE system variable	453
20.176.1	System code page	453
21.	T	455
21.1	TABCONTROLHEIGHT system variable	455
21.1.1	Tab control height in pixels	455
21.2	TABMODE system variable	455
21.2.1	Tablet mode	455
21.3	TABSFIXEDWIDTH system variable	455
21.3.1	Tabs fixed width (Mac & Linux)	455
21.4	TARGET system variable	456
21.4.1	Target	456
21.5	TDCREATE system variable	456
21.5.1	Time/Date create	456
21.6	TDINDWG system variable	456
21.6.1	Time/Date in drawing	456
21.7	TDUCREATE system variable	456
21.7.1	Time/Date universal create	456
21.8	TDUPDATE system variable	457
21.8.1	Time/Date update	457
21.9	TDUSRTIMER system variable	457
21.9.1	Time/Date user timer	457
21.10	TDUUPDATE system variable	457
21.10.1	Time/Date universal update	457
21.11	TEMPLATEPATH system variable	457



# Indice

21.11.1	Template path	457
21.12	TEMPPREFIX system variable	458
21.12.1	Temporary prefix	458
21.13	TEXTANGLE system variable	458
21.13.1	Text angle	458
21.14	TEXTED system variable	458
21.14.1	Text editor for single line text entities	458
21.15	TEXTEDITMODE system variable	459
21.15.1	Text edit mode	459
21.16	TEXTEVAL system variable	459
21.16.1	Text evaluation	459
21.17	TEXTFILL system variable	460
21.17.1	Text fill	460
21.18	TEXTQLTY system variable	460
21.18.1	Text quality (Mac & Linux)	460
21.19	TEXTSIZE system variable	461
21.19.1	Text size	461
21.20	TEXTSTYLE system variable	461
21.20.1	Text style	461
21.21	TEXTUREMAPPATH system variable	461
21.21.1	Texture map path	461
21.22	THICKNESS system variable	461
21.22.1	Thickness	461
21.23	THUMBSIZE system variable	462
21.23.1	Thumbnail preview image size	462
21.24	TILEMODE system variable	462
21.24.1	Tile mode	462
21.25	TILEMODELIGHTSYNCH system variable	463
21.25.1	Tile mode light synch	463
21.26	TIMEZONE system variable	463
21.26.1	Timezone	463
21.27	TOOLBARMARGIN system variable	465
21.27.1	Toolbar margin	465
21.28	TOOLBUTTONSIZE system variable	465
21.28.1	Tool button size	465
21.29	TOOLICONPADDING system variable	466
21.29.1	Tool icon padding	466
21.30	TOOLPALETTEPATH system variable	466
21.30.1	Tool palettes path	466
21.31	TOOLTIPDELAY system variable	466
21.31.1	Tooltip delay	466
21.32	TOOLTIPS system variable	467
21.32.1	Tooltips	467
21.33	TPSTATE system variable	467
21.33.1	Tool Palettes bar state	467
21.34	TRACEWID system variable	467
21.34.1	Trace width	467
21.35	TRACKPATH system variable	468



# Indice

21.35.1	Track path	468
21.36	TRANSPARENCYDISPLAY system variable	468
21.36.1	Transparency display	468
21.37	TRAYICONS system variable	468
21.37.1	Tray icons	468
21.38	TRAYNOTIFY system variable	469
21.38.1	Tray notify	469
21.39	TRAYTIMEOUT system variable	469
21.39.1	Tray timeout	469
21.40	TREEDEPTH system variable	469
21.40.1	Tree depth	469
21.41	TREEMAX system variable	470
21.41.1	Tree maximum	470
21.42	TRIMMODE system variable	470
21.42.1	Trim mode	470
21.43	TRUSTEDPATHS system variable	471
21.43.1	Trusted executable file locations	471
21.44	TSPACEFAC system variable	471
21.44.1	Text space factor	471
21.45	TSPACETYPE system variable	472
21.45.1	Text space type	472
21.46	TSTACKALIGN system variable	472
21.46.1	Text stack align	472
21.47	TSTACKSIZE system variable	472
21.47.1	Text stack size	472
21.48	TTFASTTEXT system variable	473
21.48.1	TrueType Text displaying and printing mode	473
22.	U	474
22.1	UCSAXISANG system variable	474
22.1.1	UCS axis angle	474
22.2	UCSBASE system variable	474
22.2.1	UCS base	474
22.3	UCSDETECT system variable	474
22.3.1	UCS detect	474
22.4	UCSFOLLOW system variable	475
22.4.1	UCS follow	475
22.5	UCSICON system variable	475
22.5.1	UCS icon	475
22.6	UCSICONPOS system variable	475
22.6.1	UCS icon position	475
22.7	UCSNAME system variable	476
22.7.1	UCS name	476
22.8	UCSORG system variable	476
22.8.1	UCS origin	476
22.9	UCSORTHO system variable	477
22.9.1	UCS orthographic	477
22.10	UCSVIEW system variable	477
22.10.1	UCS view	477



# Indice

22.11	UCSVP system variable	477
22.11.1	UCS viewports	477
22.12	UCSXDIR system variable	478
22.12.1	UCS X direction	478
22.13	UCSYDIR system variable	478
22.13.1	UCS Y direction	478
22.14	UNDOCTL system variable	478
22.14.1	Undo control	478
22.15	UNDOMARKS system variable	479
22.15.1	Undo marks	479
22.16	UNITMODE system variable	479
22.16.1	Unit mode	479
22.17	USECOMMUNICATOR system variable	479
22.17.1	Use Communicator	479
22.18	USERI1 system variable	480
22.18.1	User integer 1	480
22.19	USERI2 system variable	480
22.19.1	User integer 2	480
22.20	USERI3 system variable	480
22.20.1	User integer 3	480
22.21	USERI4 system variable	481
22.21.1	User integer 4	481
22.22	USERI5 system variable	481
22.22.1	User integer 5	481
22.23	USERR1 system variable	481
22.23.1	User real 1	481
22.24	USERR2 system variable	482
22.24.1	User real 2	482
22.25	USERR3 system variable	482
22.25.1	User real 3	482
22.26	USERR4 system variable	482
22.26.1	User real 4	482
22.27	USERR5 system variable	482
22.27.1	User real 5	482
22.28	USERS1 system variable	483
22.28.1	User string 1	483
22.29	USERS2 system variable	483
22.29.1	User string 2	483
22.30	USERS3 system variable	483
22.30.1	User string 3	483
22.31	USERS4 system variable	483
22.31.1	User string 4	483
22.32	USERS5 system variable	484
22.32.1	User string 5	484
22.33	USESTANDARDOPENFILEDIALOG system variable	484
22.33.1	Use standard open file dialog (Windows)	484
22.34	USR TIMER system variable	484
22.34.1	User timer	484



# Indice

23.	V	485
23.1	VBAMACROS system variable	485
23.1.1	Enable macros	485
23.2	VENDORNAME system variable	485
23.2.1	Vendor name	485
23.3	VERSIONCONTROLPATH system variable	485
23.3.1	Version control path	485
23.4	VERSIONCUSTOMIZABLEFILES system variable	486
23.4.1	Version customizable files	486
23.5	VIEWCTR system variable	486
23.5.1	View center	486
23.6	VIEWDIR system variable	486
23.6.1	View direction	486
23.7	VIEWMODE system variable	486
23.7.1	View mode	486
23.8	VIEWSIZE system variable	487
23.8.1	View size	487
23.9	VIEWTWIST system variable	487
23.9.1	View twist	487
23.10	VIEWUPDATEAUTO system variable	488
23.10.1	Automatically update drawing views	488
23.11	VISRETAIN system variable	488
23.11.1	Visibility retain	488
23.12	VOLUMEPREC system variable	489
23.12.1	Volume precision	489
23.13	VOLUMEUNITS system variable	489
23.13.1	Volume units	489
23.14	VPMAXIMIZEDSTATE system variable	490
23.14.1	Viewport maximized	490
23.15	VPROTATEASSOC system variable	490
23.15.1	Rotate view	490
23.16	VSMAX system variable	490
23.16.1	Virtual screen maximum	490
23.17	VSMIN system variable	491
23.17.1	Virtual screen minimum	491
23.18	VTDURATION system variable	491
23.18.1	View transition duration	491
23.19	VTENABLE system variable	491
23.19.1	Enable view transitions	491
23.20	VTFPS system variable	492
23.20.1	View transition minimum FPS	492
24.	W	493
24.1	WALLWIDTH system variable	493
24.1.1	Default wall width	493
24.2	WARNINGMESSAGES system variable	493
24.2.1	Warning messages	493
24.3	WHIPARC system variable	494
24.3.1	Whip arcs	494



# Indice

24.4	WHIPTHREAD system variable	495
24.4.1	Whip thread	495
24.5	WINDOWAREACOLOR system variable	495
24.5.1	Window area color	495
24.6	WIPEOUTFRAME system variable	495
24.6.1	Wipeout frame	495
24.7	WMFBKGND system variable	496
24.7.1	Windows Meta File background	496
24.8	WMFFOREGND system variable	496
24.8.1	Windows Meta File foreground	496
24.9	WNDLMAIN system variable	497
24.9.1	Main window state	497
24.10	WNDLSCRL system variable	497
24.10.1	Window scrollbars (Windows)	497
24.11	WNDLTEXT system variable	497
24.11.1	Text window state	497
24.12	WNDPMAIN system variable	498
24.12.1	Main window top left	498
24.13	WNDPTEXT system variable	498
24.13.1	Text window top left	498
24.14	WNDSMAIN system variable	498
24.14.1	Main window size	498
24.15	WNDSTEXT system variable	499
24.15.1	Text window size	499
24.16	WORLDUCS system variable	499
24.16.1	World UCS	499
24.17	WORLDVIEW system variable	499
24.17.1	World view	499
24.18	WRITESTAT system variable	500
24.18.1	Write status	500
24.19	WSAUTOSAVE system variable	500
24.19.1	Workspace autosave	500
24.20	WSCURRENT system variable	500
24.20.1	Current workspace	500
25.	X	501
25.1	XCLIPFRAME system variable	501
25.1.1	Xref clipping frame	501
25.2	XDWGFADECTL system variable	501
25.2.1	Xref database fade control	501
25.3	XEDIT system variable	501
25.3.1	Xref editable	501
25.4	XFADECTL system variable	502
25.4.1	Reference editing fade control	502
25.5	XLOADCTL system variable	502
25.5.1	Xref load control	502
25.6	XLOADPATH system variable	503
25.6.1	Xref load path	503
25.7	XNOTIFYTIME system variable	503



## Indice

25.7.1	Xnotify time	503
25.8	XREFCTL system variable	503
25.8.1	Xref control	503
25.9	XREFNOTIFY system variable	503
25.9.1	Xref notify	503
25.10	XREFOVERRIDE system variable	504
25.10.1	Xref override	504
26.	Z	505
26.1	ZOOMFACTOR system variable	505
26.1.1	Zoom factor	505
26.2	ZOOMWHEEL system variable	505
26.2.1	Mouse wheel zoom direction	505



# 1. System variable reference

The system variable reference gives an overview of all the system variables in BricsCAD.

System variables are used to save user preferences and BricsCAD settings. They can be accessed through the Settings dialog box. Many system variables correspond to other CAD software. When a variable is BricsCAD specific, this is indicated as well.

## 1.1 System variable data types

- **Boolean:** the value is either 1 or 0 (True or False, Yes or No).
- **Short:** integer value in the range of -32,768 to +32,767.
- **Long:** integer value in the range of -2,147,483,648 to +2,147,483,647.
- **Real:** floating point numbers with a period for a decimal point and no thousands separator.
- **String:** text.
- **String Standard:** text according to a specific format, for example a folder path.
- **3D point:** specifies a point in a 3D space.
- **2D point:** specifies a point in the XY-plane.
- **Bit flag variables:** integer variable controlled by bit codes. The value of this variable changes by adding or removing options.

Entity snap mode		0x0007 (7)
1		<input checked="" type="checkbox"/> Endpoint
2		<input checked="" type="checkbox"/> Midpoint
4		<input checked="" type="checkbox"/> Center
8		<input type="checkbox"/> Node
16		<input type="checkbox"/> Quadrant
32		<input type="checkbox"/> Intersection
64		<input type="checkbox"/> Insertion
128		<input type="checkbox"/> Perpendicular
256		<input type="checkbox"/> Tangent
512		<input type="checkbox"/> Nearest
1024		<input type="checkbox"/> Geometric center
2048		<input type="checkbox"/> Apparent intersection
4096		<input type="checkbox"/> Extension
8192		<input type="checkbox"/> Parallel
16384		<input type="checkbox"/> Turn off all snaps

## 1.2 System variables save location

- Windows registry (or **config** file for macOS and LINUX): the value is saved in a user profile and is loaded from the registry when you start a BricsCAD session. The value applies to all drawings.
- Drawing: the value is saved in the drawing and applies to that drawing only.
- NOT saved: the default value is hard-coded, and the new value is not saved when BricsCAD is restarted.

## 1.3 Editing system variables

The system variables have a default value which can be edited:

- Through the Settings dialog box.
- By calling it in the Command line.



In the Settings dialog box, you can also filter variables that are no longer set to their default value.

### 1.4 Searching for variables

You can use the SETVAR command to search for a variable.



## 2. —

### 2.1 \_PKSER system variable

#### 2.1.1 Packet serial

Shows the serial number assigned to the program.

Read-only

Type:	String
Saved in:	Not saved

### 2.2 \_QUADTABFLAGS system variable

#### 2.2.1 Quad tab flags

Temporary setting used while new quad tab layout is being implemented. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 31
Default value:	12
Possible options:	1: Fixed width tabs 2: Center tab labels 4: Tab borders 8: Double tab height 16: Show 3D Solid mass properties

### 2.3 \_VERNUM system variable

#### 2.3.1 Version number

Shows the program version number.

Read-only

Type:	String
-------	--------



Saved in:	Not saved
-----------	-----------



### 3. 3

#### 3.1 3DCOMPAREMODE system variable

##### 3.1.1 Compare visualization mode

The value of the 3DCOMPAREMODE system variable controls the display in the viewports of the Comparison layout.

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	3
Possible values:	0: First model on the left, second model on the right. 1: First model with differences on the left, second model on the right. 2: First model on the left, second model with differences on the right. 3: First model with differences on the left, second model with differences on the right. 4: Both models with all differences in one viewport. 5: Both models with all differences in one viewport. 6: Both models with all differences in one viewport. 7: Both models with all differences in one viewport.

#### 3.2 3DOSMODE system variable

##### 3.2.1 Entity 3D snap mode

The current 3D Entity Snap modes are saved through the 3DOSMODE system variable as the sum of the bitcodes of the selected snap modes.

Type:	Long
Saved in:	Registry
Range:	0 to 33023
Default value:	11



Possible values:	1: Turn off all 3D snaps 2: 3D Entity Vertices and Control Vertices of Splines 4: Midpoint of edge 8: Center of face 16: Spline Knot 32: Perpendicular to planar face 64: Nearest to face 128: Pointcloud nearest Point 32768: Intersection with face
------------------	---

### 3.3 3DSNAPMARKERCOLOR system variable

#### 3.3.1 3d snap marker color

Specifies the color of the 3d snap marker. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	5



## 4. A

### 4.1 ACADLSPASDOC system variable

#### 4.1.1 on\_start.lsp for each doc

Specifies whether on\_start\_default.lsp and on\_start.lsp are loaded into every drawing as are on\_doc\_load.lsp and on\_doc\_load\_default.lsp, or just when the first drawing opens in a session.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Do not load on_start.lsp with every drawing On (1): Load on_start.lsp with every drawing

### 4.2 ACADPREFIX system variable

#### 4.2.1 Program folder path

List of support paths, with path separators appended if necessary.

Read-only

Type:	String
Saved in:	Not saved

### 4.3 ACADVER system variable

#### 4.3.1 AutoCAD version

Shows the AutoCAD compatible program version number.

Read-only

Type:	String
Saved in:	Not saved



## 4.4 ACISHLRRESOLUTION system variable

### 4.4.1 Hidden line removal resolution

Specifies the smallest distance taken into consideration during Hidden Line Removal calculation. A negative value means that auto-calibration based on the size of the model will be used. This is highly recommended. When dealing with entities that have very small sizes the value can be set to 0.001 or smaller.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	-1.0

## 4.5 ACISOUTVER system variable

### 4.5.1 Acisout version

Specifies the ACIS version of the SAT files created by ACISOUT.

Type:	Short
Saved in:	Not saved
Default value:	70

## 4.6 ADAPTIVEGRIDSTEPSENSE system variable

### 4.6.1 Adaptive grid step size

Specifies the snap spacing (in pixels) for 'Adaptive Grid Snap' mode of SNAPTYPE system variable. Values between 2 and 100 are accepted. The step size of the Ruler in Manipulator depends on this variable.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	4.0



## 4.7 AFLAGS system variable

### 4.7.1 Attribute options

Specifies the default options for attribute creation. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Not saved
Default value:	0
Possible options:	0: No mode selected 1: Invisible 2: Constant 4: Verify 8: Preset 16: Lock position 32: Multiline

## 4.8 ALLOWTABEXTERNALMOVE system variable

### 4.8.1 Move tabs externally

Allows a tab to be moved to another tab control On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't allow a tab to be moved externally On (1): Allow a tab to be moved externally

## 4.9 ALLOWTABMOVE system variable

### 4.9.1 Move tabs

Allows a tab to be moved horizontally by dragging On/Off.

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't allow tabs to be moved On (1): Allow tabs to be moved

## 4.10 ALLOWTABSPLIT system variable

### 4.10.1 Split tabs

Allows the tab control to be split by dragging a tab On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't allow tabs to be split On (1): Allow tabs to be split

## 4.11 ANGBASE system variable

### 4.11.1 Angle base

Specifies the direction of angle 0, relative to the current UCS.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 4.12 ANGDIR system variable

### 4.12.1 Angle direction

Specifies the positive angle direction from angle 0, relative to the current UCS.



Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Counter-clockwise On (1): Clockwise

## 4.13 ANNOALLVISIBLE system variable

### 4.13.1 Annotation visibility

Hides or displays annotative entities that do not support the current annotation scale. The setting is saved individually for model space and each layout.

Type:	Short
Saved in:	Drawing
Default value:	1
Possible values:	0: Only annotative entities that support the current scale representation are displayed 1: All annotative entities are displayed

## 4.14 ANNOAUTOSCALE system variable

### 4.14.1 Annotation scaling

Synchronizes annotative entities with the current annotation scale.

Type:	Short
Saved in:	Registry
Default value:	-4



Possible values:	0: Newly set annotation scale is not added to annotative entities. 1: Newly set annotation scale is added to annotative entities supporting it except entities on locked, turned off, frozen or viewport-frozen layers. 2: Newly set annotation scale is added to annotative entities supporting it except entities on turned off, frozen or viewport-frozen layers. 3: Newly set annotation scale is added to annotative entities supporting it except entities on locked layers. 4: Newly set annotation scale is added to all annotative entities supporting it. -1: Newly set annotation scale is not added to annotative entities (toggled value 1). -2: Newly set annotation scale is not added to annotative entities (toggled value 2). -3: Newly set annotation scale is not added to annotative entities (toggled value 3). -4: Newly set annotation scale is not added to annotative entities (toggled value 4).
------------------	---

## 4.15 ANNOSELECTED system variable

### 4.15.1 Selected object is annotative

Specifies if the selected object is annotative and is used by menus.

Read-only

Type:	Boolean
Saved in:	Not saved

## 4.16 ANNOTATIVEDWG system variable

### 4.16.1 Annotative drawing

Specifies whether or not the drawing will behave as an annotative block when inserted into another drawing. The ANNOTATIVEDWG system variable becomes Read-only if the drawing contains annotative entities.

Type:	Boolean
Saved in:	Drawing
Default value:	Off



Possible values:	Off (0): Not annotative On (1): Annotative
------------------	---

## 4.17 ANTIALIASRENDER system variable

### 4.17.1 Anti-alias amount for render

Specifies the smoothness of the output from RENDER command. For values higher than 1, an anti-aliased output is calculated. High anti-alias values incur a high calculation cost.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 5
Default value:	2
Possible values:	1: 1x1 (no anti-aliasing) 2: 2x2 3: 3x3 4: 4x4 5: 5x5 (maximum anti-aliasing)

## 4.18 ANTALIASSCREEN system variable

### 4.18.1 Anti-alias amount for screen

Specifies the smoothness of on-screen curve display. For values higher than 1 and visual style 2DWireframe (which uses GDI), calculation of an anti-aliased display comes at a high performance cost (roughly a factor 7). For the other display modes the calculation time increases with less than 50%.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 5
Default value:	1



Possible values:	1: 1x1 (no anti-aliasing) 2: 2x2 3: 3x3 4: 4x4 5: 5x5 (maximum anti-aliasing)
------------------	---

## 4.19 APBOX system variable

### 4.19.1 Entity snap aperture box

Toggles the display of the Entity Snap aperture box. If the APBOX system variable is on, the entity Snap Aperture Box is added to the crosshairs when one or more entity snaps are active.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Does not display the aperture box. On (1): Displays the aperture box.


## 4.20 APERTURE system variable

### 4.20.1 Entity snap aperture

Specifies the size (in pixels) of the entity snap aperture box. Values between 1 and 50 are accepted.

The program searches the area inside the rectangular aperture cursor for geometric features, such as endpoints and mid points. A large aperture cursor makes it easier for you to hover over geometric features, but then the program may find too many matching entity snap points; a smaller one may be more difficult for you to position over geometry, but is more precise at snapping to geometric features.

Type:	Short
Saved in:	Registry
Default value:	10

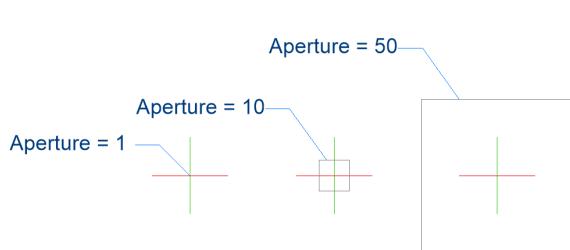

## 4.21 AREA system variable

### 4.21.1 Calculated area

Specifies the last calculated area by AREA, LIST or DBLIST.

Read-only

Type:	Real
Saved in:	Not saved

## 4.22 AREAPREC system variable

### 4.22.1 Area precision

Specifies the number of decimal places displayed for areas when the area bit of PROPUNITS is on. If negative, LUPREC is used.

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	-1
Possible values:	<ul style="list-style-type: none"><li>-1: Use LUPREC</li><li>0</li><li>1: 0.0</li><li>2: 0.00</li><li>3: 0.000</li><li>4: 0.0000</li><li>5: 0.00000</li><li>6: 0.000000</li><li>7: 0.0000000</li><li>8: 0.00000000</li></ul>



## 4.23 AREAUNITS system variable

### 4.23.1 Area units

Specifies a list of units used for displaying areas when the area bit of PROPUNITS is on. If empty, all areas are displayed in the current drawing unit, as defined by INSUNITS. If multiple units are selected, the unit that fits best is used.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	in ft mi µm mm cm m km

## 4.24 ARRAYASSOCIATIVITY system variable

### 4.24.1 Associative arrays

Specifies whether newly created arrays are associative or non-associative.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Not associative On (1): Associative

## 4.25 ARRAYEDITSTATE system variable

### 4.25.1 Array editing state

Array editing state is activated while editing an associative array's source entities.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	Off



## 4.26 ARRAYTYPE system variable

### 4.26.1 Array type

Specifies the default associative array type.

Type:	Short
Saved in:	Registry
Default value:	0
Possible values:	0: Rectangular array 1: Path array 2: Polar array

## 4.27 ASSOCIATIVITY system variable

### 4.27.1 Associativity

Defines if TIN Surface or Grading are associative.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	15
Possible options:	1: TIN Surface associativity 2: Grading associativity 4: TIN Volume Surface associativity 8: Corridor associativity

## 4.28 ATTDIA system variable

### 4.28.1 Attribute dialog

Specifies whether or not the INSERT command uses a dialog box for entering attribute values.

Type:	Boolean
Saved in:	Registry



Default value:	Off
Possible values:	Off (0): Don't use dialog box On (1): Use dialog box

## 4.29 ATTMODE system variable

### 4.29.1 Attribute display mode

Specifies whether attributes are visible or not. If the ATTMODE variable is set to 2, all attributes display, including Hidden attributes.

Type:	Short
Saved in:	Drawing
Default value:	1
Possible values:	0: Don't show 1: As defined in block 2: Show all

## 4.30 ATTRACTONDISTANCE system variable

### 4.30.1 Grips attraction distance

Specifies the grips attraction distance. If the cursor is within this distance the cursor is attracted by the grip and jumps to it.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	4

## 4.31 ATTREQ system variable

### 4.31.1 Insertion default settings

Specifies whether default attribute settings are used by the INSERT command during block insertion.

Type:	Boolean
-------	---------



Saved in:	Registry
Default value:	1
Possible values:	Off (0): Use default values On (1): Prompt user

## 4.32 AUDITCTL system variable

### 4.32.1 Audit control

Toggles the creation of audit report (ADT) files by the AUDIT command. When you turn on the AUDITCTL settings variable, Audit creates an ASCII file describing problems and the action taken. This report, with the file extension .adt, is placed in the same directory as the current drawing.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't write ADT files On (1): Write ADT files

## 4.33 AUDITERRORCOUNT system variable

### 4.33.1 Audit Error Count

The number of errors found in the last audit.

Read-only

Type:	Short
Saved in:	Not saved

## 4.34 AUNITS system variable

### 4.34.1 Angular unit type

Specifies the angular unit type.

Type:	Short
-------	-------



Saved in:	Drawing
Default value:	0
Possible values:	0: Decimal degrees 1: Degrees/minutes/seconds 2: Gradians 3: Radians 4: Surveyor's units

## 4.35 AUPREC system variable

### 4.35.1 Angular unit precision

Specifies the number of decimal places for angular units.

Type:	Short
Saved in:	Drawing
Default value:	0
Possible values:	0: 0 1: 0.0 2: 0.00 3: 0.000 4: 0.0000 5: 0.00000 6: 0.000000 7: 0.0000000 8: 0.00000000

## 4.36 AUTOADOPTSIZES system variable

### 4.36.1 Auto adopt sizes

When On, the wall width and height, and the slab thickness is copied from the highlighted existing geometry, when using BIMQUICKDRAW.

BricsCAD only

Type:	Boolean
Saved in:	Drawing



Default value:	On
Possible values:	Off (0): The wall width and height, and the slab thickness is not copied. On (1): The wall width and height, and the slab thickness is copied.

## 4.37 AUTOCOMPLETEDELAY system variable

### 4.37.1 Auto complete delay

Specifies the amount of time that elapses before automated keyboard features display at the Command prompt.

Type:	Real
Saved in:	Registry
Default value:	0.3

## 4.38 AUTOCOMPLETEMODE system variable

### 4.38.1 Auto complete mode

Specifies what types of automated keyboard features are available at the Command prompt. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 63
Default value:	47
Possible options:	1: Enable 2: Auto-Append 4: Suggestion List 8: Display Icons (unsupported) 16: Exclude the display of system variables 32: Display preference variables



## 4.39 AUTOMENULOAD system variable

### 4.39.1 Auto menu load

When you open a drawing, determines whether the default menu or a menu file associated with a drawing is loaded.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Not automatic menu loading On (1): Automatic menu loading

## 4.40 AUTORESETSCALES system variable

### 4.40.1 Purge unused scales

Unneeded annotation scales are deleted automatically when drawing contains a large number of annotation scales. Storing a large number of annotation scales decreases performance. Scales are purged when drawing is being loaded.

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	0
Possible values:	0: Ask in dialog box 1: Always purge unneeded scales 2: Don't purge scales and don't show dialog box when drawing contains a large number of scales

## 4.41 AUTOSAVECHECKSONLYFIRSTBITDBMOD system variable

### 4.41.1 Ignore all but first bit of DBMOD for autosave

The first bit(1) of DBMOD means that the object database is modified. If this user preference is switched on, no autosave file will be created for files that are viewed only (DBMOD changes as soon as you pan and zoom).



BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Autosave file for files that are viewed only On (1): No autosave file for files that are viewed only

## 4.42 AUTOSNAP system variable

### 4.42.1 AutoSnap

Toggles polar and entity snap tracking and controls the display of snap marker, tooltips and magnet. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 127
Default value:	127
Possible options:	0: All off 1: AutoSnap marker 2: AutoSnap tooltips 4: AutoSnap magnet 8: Polar tracking 16: Entity snap tracking 32: Tooltips for polar tracking and entity snap tracking 64: Tracking line from LASTPOINT

## 4.43 AUTOTRACKINGVECCOLOR system variable

### 4.43.1 Auto tracking vector color

Specifies the color of the polar/snap tracking vector.

Type:	Short
Saved in:	Preference



Range:	1 to 255
Default value:	171

## 4.44 AUTOVPFITTING system variable

### 4.44.1 Automatically fit viewport borders

Specifies if viewport borders automatically fit when updating the viewport.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't fit viewports' borders automatically On (1): Fit viewports' borders automatically

## 4.45 AXISMODE system variable

### 4.45.1 Axis mode

Legacy storage holder for the AXIS command located in AutoCAD prior to R12.

Type:	Boolean
Saved in:	Not saved
Default value:	Off

## 4.46 AXISUNIT system variable

### 4.46.1 Axis unit

Legacy storage holder for the AXIS command located in AutoCAD prior to R12.

Type:	2D point
Saved in:	Not saved
Default value:	0,0



## 5. B

### 5.1 BACKGROUNDPLOT system variable

#### 5.1.1 Background plotting

Specifies whether background plotting is enabled for plotting and/or publishing. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	2
Possible options:	0: None 1: When plotting (Not supported) 2: When publishing

### 5.2 BACKZ system variable

#### 5.2.1 Back clipping plane offset

Specifies the current viewport's back clipping plane offset from the target plane, expressed in drawing units. Clipping planes are used in the CLIPPING option of the DVIEW command.

Type:	Real
Saved in:	Drawing
Default value:	0.0

### 5.3 BASEFILE system variable

#### 5.3.1 Template

Specifies the path and name of the default template file to use when creating a new drawing. If empty, built-in defaults will be used.

BricsCAD only

Type:	String
-------	--------



Saved in:	Registry
-----------	----------

## 5.4 BCFSOURCEURL system variable

### 5.4.1 BCF source URL

Web address of the default external BIM collaboration service, launched from the BIM BCF panel.

BricsCAD only

Type:	String
Saved in:	Registry

## 5.5 BIMACTIVATEPYTHON system variable

### 5.5.1 Activate Python

Enables embedded Python for BriqPy.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't enable embedded Python On (1): Enable embedded Python

## 5.6 BIMOSMODE system variable

### 5.6.1 BIM snap mode

Overrules entity snap modes for BIM entities using bitcodes.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 3



Default value:	3
Possible values:	0: Entity snap modes are not overruled for BIM entities 1: Axis of linear solid 2: Axis of BIM grid

## 5.7 BIMPROFILESTANDARDS system variable

### 5.7.1 Profile's standards

Specifies which profile standards will be used in the Profiles dialog box and panel. You can add multiple standards using the semicolon ; as a separator.

BricsCAD only

Type:	String
Saved in:	Registry

## 5.8 BINDTYPE system variable

### 5.8.1 Xref bind type

Specifies the handling of xref names when binding xrefs or when xrefs are edited in-place. If the BINDTYPE variable = 1 (Insert-like behavior), Xrefs will be converted into blocks. If BINDTYPE = 0 (traditional binding behavior), it binds the xref and makes the xref part of the drawing.

Type:	Boolean
Saved in:	Not saved
Default value:	0
Possible values:	Off (0): Traditional binding behavior On (1): Insert-like behavior

## 5.9 BKGCOLOR system variable

### 5.9.1 Background color

Specifies the background color of the drawing window when working in model space.

BricsCAD only

Type:	String
-------	--------



Saved in:	Registry
Default value:	RGB:24,25,28

## 5.10 BKGCOLORPS system variable

### 5.10.1 Paper space background color

Set the background color of the drawing window when working in paper space.

BricsCAD only


Type:	String
Saved in:	Registry
Default value:	RGB:250,250,250

## 5.11 BLIPMODE system variable

### 5.11.1 Blip mode

Toggles the display of blips that are made as you pick points in the drawing.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't display marker blips On (1): Display marker blips





## 5.12 BLOCKEDITLOCK system variable

### 5.12.1 Block editor lock

Disables opening of the Block Editor and editing of dynamic block definitions.

Type:	Boolean
Saved in:	Registry
Default value:	Off

## 5.13 BLOCKEDITOR system variable

### 5.13.1 Block editor

Shows whether the Block Editor is open or not.

Read-only

Type:	Boolean
Saved in:	Not saved

## 5.14 BLOCKIFYMODE system variable

### 5.14.1 Blockify settings

Specifies the behavior of the BLOCKIFY and PARAMETRICBLOCKIFY commands. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 63
Default value:	16



Possible options:	1: Use entire drawing as search space 2: Use default block insertion point 4: Use default block name 8: Replace patterns by arrays (BLOCKIFY only) 16: Use block references as array base elements (BLOCKIFY only) 32: Compare geometry only
-------------------	---

## 5.15 BLOCKIFTOLERANCE system variable

### 5.15.1 Blockify tolerance

Specifies a relative tolerance used in the BLOCKIFY and PARAMETRICBLOCKIFY commands for determining whether two entities are equal. An example of a relative tolerance is the maximum ratio of the difference between two line lengths to the length of one line. A negative value means the algorithm will determine the optimal tolerance itself (0.000001 for 2D and 0.0003 for 3D entities). This option is highly recommended.

BricsCAD only

Type:	Real
Saved in:	Registry
Default value:	-1.0

## 5.16 BLOCKSPATH system variable

### 5.16.1 Blocks path

Specifies an additional folder in the file dialog for the INSERT command.

BricsCAD only

Type:	String Standard
Saved in:	Preference

## 5.17 BMAUTOUPDATE system variable

### 5.17.1 Update external components

Specifies when external assembly components are reloaded to reflect the changes in their definition files.

BricsCAD only



Type:	Short
Saved in:	Registry
Default value:	1
Possible values:	0: Only when BMUPDATE command is issued 1: Automatically on opening the file

## 5.18 BMFORMTEMPLATEPATH system variable

### 5.18.1 BMFORM template path

Specifies the path and name of the default BMFORM Template file.

BricsCAD only

Type:	String
Saved in:	Preference

## 5.19 BMUPDATEMODE system variable

### 5.19.1 Assembly components updating mode

Specifies if external assembly components are reloaded only in case they are modified (faster) or unconditionally (slower, but repairs assembly structure).

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	0
Possible values:	0: Update only modified components 1: Update all components

## 5.20 BOUNDARYCOLOR system variable

### 5.20.1 Detected Boundary Color

Specifies which color to be used for highlighting detected boundaries.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	1 to 255
Default value:	95

## 5.21 BSYSLIBCOPYOVERWRITE system variable

### 5.21.1 Bsystlib copy overwrite

What to do when copying a material or composition with a name that already exists in the target database.  
BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	0
Possible values:	0: Prompt 1: Skip 2: Overwrite 3: Rename

## 5.22 BVMODE system variable

### 5.22.1 Block Visibility Mode

Specifies how hidden entities of the current visibility state are displayed in the Block Editor.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0



Possible values:	0: Hidden entities are invisible 1: Hidden entities are visible but dimmed
------------------	---



## 6. C

### 6.1 CACHELAYOUT system variable

#### 6.1.1 Cache layout

Specifies whether layouts are cached, resulting in faster switching from one layout to another.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't cache layout On (1): Cache layout

### 6.2 CAMERADISPLAY system variable

#### 6.2.1 Camera display

Specifies the display of camera glyphs.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display camera glyphs On (1): Display camera glyphs

### 6.3 CAMERAHEIGHT system variable

#### 6.3.1 Camera height

Specifies the default height, in drawing units, for new camera entities.

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 6.4 CANNOSCALE system variable

### 6.4.1 Annotation scale name

Specifies the name of the current annotation scale for the current space.

Type:	String
Saved in:	Drawing
Default value:	1:1

## 6.5 CANNOSCALEVALUE system variable

### 6.5.1 Annotation scale value

Displays the value of the current annotation scale.

Read-only

Type:	Real
Saved in:	Drawing
Default value:	1.0

## 6.6 CDATE system variable

### 6.6.1 Calendar date

Shows the current date and time in decimal format.

Read-only

Type:	Real
Saved in:	Not saved

## 6.7 CECOLOR system variable

### 6.7.1 Entity color

Specifies the color for new entities.

Type:	String
-------	--------



Saved in:	Drawing
Default value:	ByLayer

## 6.8 CELTSCALE system variable

### 6.8.1 Entity linetype scale

Specifies the current entity linetype scaling factor.

Type:	Real
Saved in:	Drawing
Range:	Greater than 0
Default value:	1.0

## 6.9 CELTYPE system variable

### 6.9.1 Entity linetype

Specifies the linetype for new entities.

Type:	String
Saved in:	Drawing
Default value:	ByLayer

## 6.10 CELWEIGHT system variable

### 6.10.1 Entity linewidth

Specifies the linewidth of new entities (in hundredths of millimeters).

Type:	Short
Saved in:	Drawing
Range:	-3 to 211
Default value:	-1




Possible values:	-3: Default (defined by LWDEFAULT) -2: ByBlock -1: ByLayer 0 - 211: Lineweight value in hundredths of millimeters
------------------	--

### 6.11 CENTERCROSSGAP system variable

#### 6.11.1 Center mark cross gap

Specifies the gap between the center mark and its centerlines.

Type:	String
Saved in:	Drawing
Default value:	0.05x

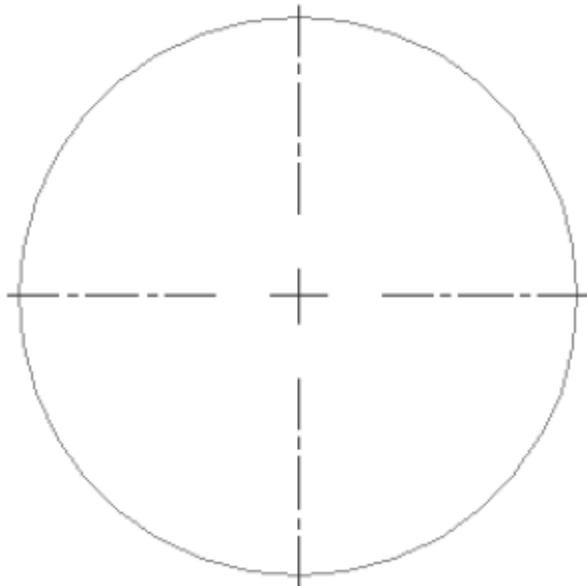

### 6.12 CENTERCROSSSIZE system variable


#### 6.12.1 Center mark cross size

Specifies the size of the associative center mark.

Type:	String
Saved in:	Drawing



Default value:	0.1x
----------------	------

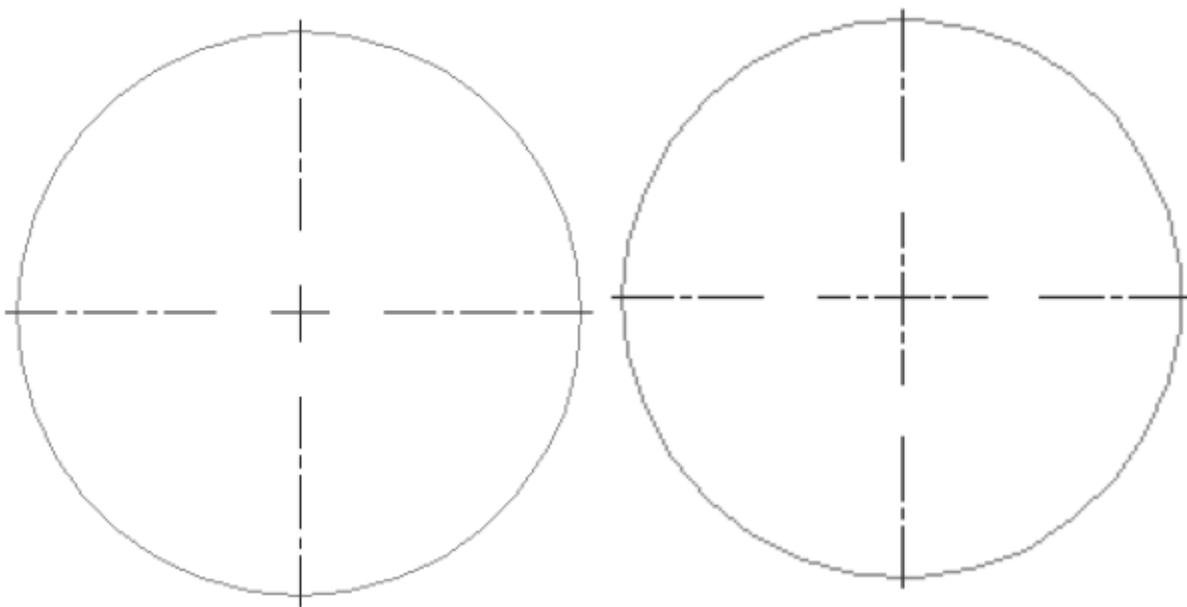


## 6.13 CENTEREXE system variable

### 6.13.1 Centerline extensions length

Specifies the length of the centerline extensions. The value is expressed in drawing units.

Type:	Real
Saved in:	Drawing
Default value:	0.12

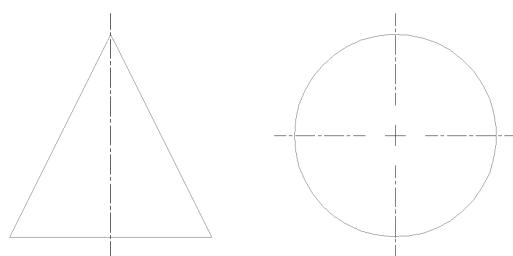



## 6.14 CENTERLAYER system variable

### 6.14.1 Default layer for center mark or centerline

Specifies a default layer for new center mark or centerline.

Type:	String
Saved in:	Drawing
Default value:	.

## 6.15 CENTERLTSIZE system variable

### 6.15.1 Linetype scale for center mark or centerline

Specifies the linetype scale used by center marks and centerlines.

Type:	Real
Saved in:	Drawing
Default value:	1.0

## 6.16 CENTERLTYPE system variable

### 6.16.1 Linetype for center mark or centerline

Specifies the linetype used by center marks and centerlines.

Type:	String
Saved in:	Drawing
Default value:	CENTER2

## 6.17 CENTERLTYPEFILE system variable

### 6.17.1 Linetype file for center mark or centerline

Specifies the linetype file used to create center marks and centerlines. Default in imperial unit drawings: default.lin. Default in metric unit drawings: iso.lin.

Type:	String
-------	--------




Saved in:

Drawing

## 6.18 CENTERMARKEXE system variable

### 6.18.1 Automatic extension for center mark or centerline

Specifies whether centerlines extend automatically from new center marks.

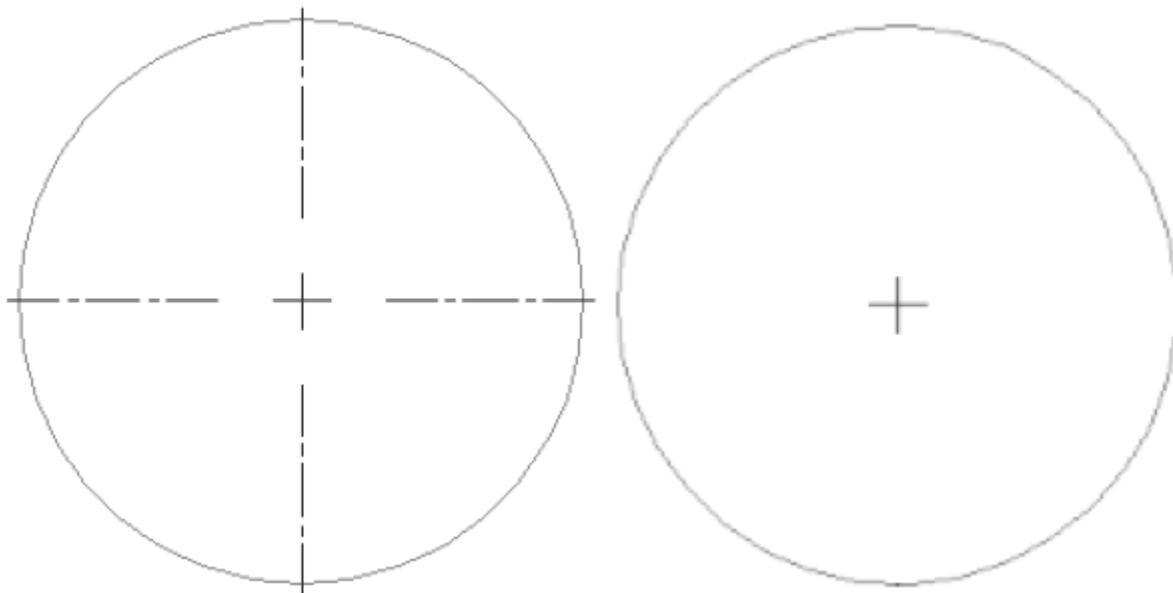

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): No automatic extension On (1): Automatic extension

## 6.19 CETRANSPARENCY system variable

### 6.19.1 Transparency for new entities

Specifies the transparency level for new entities.

Type:	String
Saved in:	Drawing



Default value:	ByLayer
Possible values:	ByLayer: Apply the layer's transparency ByBlock: Apply the block's transparency 0: Apply no transparency (fully opaque) 1-90: Apply transparency percentage from least (1) to most (90) transparent

## 6.20 CHAMFERA system variable

### 6.20.1 Chamfer first distance

Specifies the first chamfer distance when the chamfer input mode requires two distances (CHAMMODE is Distance-Distance).

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 6.21 CHAMFERB system variable

### 6.21.1 Chamfer second distance

Specifies the second chamfer distance when the chamfer input mode requires two distances (CHAMMODE is Distance-Distance).

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 6.22 CHAMFERC system variable

### 6.22.1 Chamfer length

Specifies the chamfer length when the chamfer input mode requires a length and an angle (CHAMMODE is Length-Angle).

Type:	Real
-------	------



Saved in:	Drawing
Default value:	0.0

## 6.23 CHAMFERD system variable

### 6.23.1 Chamfer angle

Specifies the chamfer angle when the chamfer input mode requires a length and an angle (CHAMMODE is Length-Angle).


Type:	Real
Saved in:	Drawing
Default value:	0.0

## 6.24 CHAMMODE system variable

### 6.24.1 Chamfer mode

Specifies the input method by which chamfers are created: Distance-Distance or Length-Angle.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Distance-Distance 1: Length-Angle

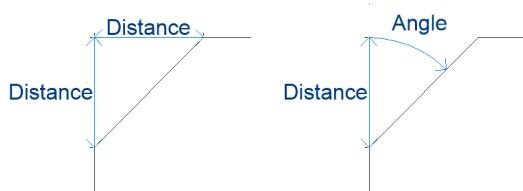



## 6.25 CHECKDWLPRESENCE system variable

### 6.25.1 Check DwL file existence before open

When trying to open a drawing, warn the user about the presence of a dwl lock file. The content of the lock files allows to inform other users trying to open that drawing, that it is in use, since when, and by whom. This is typically useful for drawings on a shared folder that can be accessed by multiple users from different operating systems.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off (Windows) On (Mac & Linux)
Possible values:	Off (0): Don't check dwl file existence before opening a drawing On (1): Check dwl file existence before opening a drawing

## 6.26 CIRCLERAD system variable

### 6.26.1 Circle radius

Specifies the default circle radius. If set to zero, there is no default.

Type:	Real
Saved in:	Not saved
Default value:	0.0

## 6.27 CLAYER system variable

### 6.27.1 Current layer

Specifies the layer for new entities.

Type:	String
Saved in:	Drawing
Default value:	0



## 6.28 CLEANSCREENOPTIONS system variable

### 6.28.1 Clean screen options

Specifies which UI elements are hidden by the CLEANSCREENON command. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 127
Default value:	15
Possible options:	<ul style="list-style-type: none"><li>1: Hide document tabs</li><li>2: Hide dockable panels</li><li>4: Hide toolbars</li><li>8: Hide ribbon</li><li>16: Hide Command line panel</li><li>32: Hide status bar</li><li>64: Hide menu bar</li></ul>

## 6.29 CLEANSCREENSTATE system variable

### 6.29.1 Clean screen state

Specifies whether clean screen state is active or not. Clean screen state is controlled by the CLEANSCREENON and CLEANSCREENOFF commands. Activating the clean screen state makes the drawing area larger by hiding elements of the user interface.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	Off

## 6.30 CLIPBOARDFORMAT system variable

### 6.30.1 Clipboard DWG format

Specifies the drawing format version used for copying to the clipboard.



BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	4
Possible values:	1: DWG 2018 4: DWG 2013 7: DWG 2010 10: DWG 2007 13: DWG 2004 16: DWG 2000 19: DWG R14 22: DWG R13 25: DWG R11/R12

## 6.31 CLIPBOARDFORMATS system variable

### 6.31.1 Clipboard Formats

Types of data that are supported when copying to the clipboard. Flags can be unchecked to improve performance. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 127
Default value:	127
Possible options:	1: Bitmap 2: Metafile Picture Format 4: Enhanced Metafile 8: AutoCAD.r14 16: BricsCAD 32: OLE Embed Source and Object Descriptor 64: CVS and XMLSS table data



## 6.32 CLIPROMPTLINES system variable

### 6.32.1 Prompt Lines

If the Command panel is not visible, the last few Command line entries are shortly displayed at the bottom of the main graphics window each time a command is entered. CLIPROMPTLINES specifies the number of lines to display. (set to zero to disable the feature).

Type:	Short
Saved in:	Registry
Range:	0 to 64
Default value:	4

## 6.33 CLISTATE system variable

### 6.33.1 Command line state

Specifies whether the Command line is visible or not.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	1
Possible values:	Off (0): Command line is invisible On (1): Command line is visible

## 6.34 CLOSECHECKSONLYFIRSTBITDBMOD system variable

### 6.34.1 Ignore all but first bit of DBMOD for close

The first bit(1) of DBMOD means that the object database is modified. If this user preference is switched on, you can view a file, then close it without getting a request to save the file.

BricsCAD only

Type:	Boolean
Saved in:	Preference



Default value:	Off
Possible values:	Off (0): Don't close drawing without getting a request to save the file. On (1): Close drawing without getting a request to save the file.

## 6.35 CLOUDDOWNLOADPATH system variable

### 6.35.1 Cloud download path

Specifies the folder where files downloaded through the Bricsys 24/7 Panel are saved.

BricsCAD only

Type:	String Standard
Saved in:	Registry
Default value:	{User}Documents/Bricsys247

## 6.36 CLOUDLOG system variable

### 6.36.1 Cloud log

Specifies whether Bricsys 24/7 transactions are being logged or not. If set to 2 ("Log file") the log file will be written in the folder specified by the LOGFILEPATH variable.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: No log 1: Log messages 2: Log file

## 6.37 CLOUDLOGVERBOSE system variable

### 6.37.1 Cloud log verbose

If switched on, more information is being logged but therefore Bricsys 24/7 actions will be slower.



BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Verbose log off On (1): Verbose log on

## 6.38 CLOUDONMODIFIED system variable

### 6.38.1 Cloud on modified

Specifies what to do when a file opened from Bricsys 24/7, is modified and saved locally.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	1
Possible values:	0: Do nothing 1: Prompt 2: Always upload to new revision 3: Always save locally under new name

## 6.39 CLOUDSERVER system variable

### 6.39.1 Cloud server

Specifies the address of the Bricsys 24/7 server. Examples: <https://my.bricsys247.com/>, <https://apac.bricsys247.com/>

BricsCAD only

Type:	String
Saved in:	Registry



## 6.40 CLOUDTEMPFOLDER system variable

### 6.40.1 Cloud temporary folder

Specifies the folder where temporary files from Bricsys 24/7 are downloaded.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	{User}AppData/Local/Temp/Bricsys_24_7

## 6.41 CLOUDUPLOADDEPENDENCIES system variable

### 6.41.1 Cloud upload dependencies

Specifies what to do with dependencies (such as external references or images) when a drawing is uploaded to Bricsys 24/7.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	1
Possible values:	0: Upload drawing only (ignore dependencies) 1: Use eTransmit dialog if the drawing contains external references 2: Always use eTransmit dialog

## 6.42 CMATERIAL system variable

### 6.42.1 Current material

Specifies the render material for new entities.

Type:	String
Saved in:	Drawing
Default value:	ByLayer



## 6.43 CMDACTIVE system variable

### 6.43.1 Active command

Stores the type of the current command: ordinary command, transparent command, script, dialog box, DDE, lisp or ObjectARX command. The value is stored as a bitcode using the sum of the values of all selected options.

Read-only

Type:	Short
Saved in:	Not saved
Default value:	1
Possible options:	1: Ordinary command is active 2: Ordinary command and a transparent command are active 4: Script is active 8: Dialog box is active 16: DDE is active 32: lisp is active (only visible to an ObjectARX-defined command) 64: ObjectARX command is active

## 6.44 CMDDIA system variable

### 6.44.1 Command dialogs

Specifies whether dialog boxes are turned on for commands.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't use dialog box for commands On (1): Use dialog box for commands

## 6.45 CMDECHO system variable

### 6.45.1 Command echo

Toggles the display of prompts and input during the lisp 'command' function.



Type:	Boolean
Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Echoing off On (1): Echoing on

## 6.46 CMDLINEEDITBGCOLOR system variable

### 6.46.1 Command line edit background color

Specifies the background color of the Command line's edit field. Color may be represented as a name (for standard colors) or as RGB values. At the Command line, color may be entered as a name (for standard colors), RGB values, or HTML color.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	50 54 56 (Settings dialog) #323638 (Command line)

## 6.47 CMDLINEEDITFGCOLOR system variable

### 6.47.1 Command line edit foreground color

Specifies the foreground color (RGB) of the Command line's edit field. Color may be represented as a name (for standard colors) or as RGB values. At the Command line, color may be entered as a name (for standard colors), RGB values, or HTML color.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	White (Settings dialog) #FFFFFF (Command line)



## 6.48 CMDLINEFADINGLOGBGCOLOR system variable

### 6.48.1 Command line fading log background color

Specifies the background color (RGB) of the Command line's fading log. Color may be represented as a name (for standard colors) or as RGB values. At the Command line, color may be entered as a name (for standard colors), RGB values, or HTML color.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	50 54 56 (Settings dialog) #323638 (Command line)

## 6.49 CMDLINEFADINGLOGFADEDELAY system variable

### 6.49.1 Command line fading log fade delay

Specifies the amount of time (in seconds) that elapses before Command line's fading log starts to fade.

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.0 to 10.0
Default value:	2.0

## 6.50 CMDLINEFADINGLOGFGCOLOR system variable

### 6.50.1 Command line fading log foreground color

Specifies the foreground color of the Command line's fading log.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	White



## 6.51 CMDFADINGLOGTRANSPARENCY system variable

### 6.51.1 Command line fading log transparency

Specifies the transparency of the Command line's fading log. A value of 0 sets the log to be fully opaque, and a value of 100 sets the log to be fully transparent.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	30

## 6.52 CMDFONTNAME system variable

### 6.52.1 Command line font name

Specifies the font to use in the Command line.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	Consolas
Possible values:	

## 6.53 CMDFONTSIZE system variable

### 6.53.1 Command line font size

Specifies a font size for the Command line.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	10



### 6.54 CMDLINEFRAMEACTIVETRANSPARENCY system variable

#### 6.54.1 Command line frame transparency when active (Windows)

Specifies the transparency of the Command line frame when active. A value of 0 sets the frame to be fully opaque, and a value of 100 sets the frame to be fully transparent.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	10

### 6.55 CMDLINEFRAMEINACTIVETRANSPARENCY system variable

#### 6.55.1 Command line frame transparency when inactive (Windows)

Specifies the transparency of the Command line frame when inactive. A value of 0 sets the frame to be fully opaque, and a value of 100 sets the frame to be fully transparent.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	30

### 6.56 CMDLINELISTBGCOLOR system variable

#### 6.56.1 Command line list background color

Specifies the background color of the Command line's history list.

BricsCAD only

Type:	String
Saved in:	Preference



Default value:	RGB:130,130,130
----------------	-----------------

## 6.57 CMDLINELISTFGCOLOR system variable

### 6.57.1 Command line list foreground color

Specifies the foreground color of the Command line's history list.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	White

## 6.58 CMDLINEOPTIONBGCOLOR system variable

### 6.58.1 Command line option background color

Specifies the background color of the Command line's options.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	RGB:121,132,142

## 6.59 CMDLINEOPTIONSHORTCUTCOLOR system variable

### 6.59.1 Command line option shortcut color

Specifies the color of the Command line's option shortcut.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	RGB:255,187,0



## 6.60 CMDLINEUSENEWFRAME system variable

### 6.60.1 Command line use new floating frame (Windows)

Specifies whether the new mini-frame is used when the Command line is floating.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't use new mini-frame On (1): Use new mini-frame

## 6.61 CMDLNTEXT system variable

### 6.61.1 Prompt prefix

Specifies the prompt prefix shown in the Command line.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	:

## 6.62 CMDNAMES system variable

### 6.62.1 Active Command Name

Shows the names of the active and transparent commands.

Read-only

Type:	String
Saved in:	Not saved



## 6.63 CMLEADERSTYLE system variable

### 6.63.1 Multileader style

Specifies the multileader style for new multileader entities.

Type:	String
Saved in:	Drawing
Default value:	Standard

## 6.64 CMLJUST system variable

### 6.64.1 Multiline justification

Specifies the justification when creating multilines relative to the point you pick.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: Top 1: Zero 2: Bottom

## 6.65 CMLSCALE system variable

### 6.65.1 Multiline scale

Specifies the overall width scale factor for multilines. A negative scale factor mirrors the offset lines.

Type:	Real
Saved in:	Drawing
Default value:	1.0



## 6.66 CMLSTYLE system variable

### 6.66.1 Multiline style

Specifies the multiline style for new multiline entities.

Type:	String
Saved in:	Drawing
Default value:	Standard

## 6.67 CMPCLRMISS system variable

### 6.67.1 Color for displaying of missing entities in DWGCOMPARE mode

Specifies the color for displaying of missing entities in DWGCOMPARE mode.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	1

## 6.68 CMPCLRMOD1 system variable

### 6.68.1 Color for displaying of modified entities in this drawing in DWGCOMPARE mode

Specifies the color for displaying of modified entities in this drawing in DWGCOMPARE mode.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	253



## 6.69 CMPCLRMOD2 system variable

### 6.69.1 Color for displaying of modified entities in the second drawing in DWGCOMPARE mode

Specifies the color for displaying of modified entities in the second drawing in DWGCOMPARE mode.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	2

## 6.70 CMPCLRNEW system variable

### 6.70.1 Color for displaying of new entities in DWGCOMPARE mode

Specifies the color for displaying of new entities in DWGCOMPARE mode.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	3

## 6.71 CMPDIFFLIMIT system variable

### 6.71.1 Maximal number of entities in the output of DWGCOMPARE command

Specifies the limit for entities comparison in DWGCOMPARE command.

BricsCAD only

Type:	Long
Saved in:	Registry
Range:	1 to 10000000



Default value:	10000000
----------------	----------

## 6.72 CMPFADECTL system variable

### 6.72.1 DWGCOMPARE fade control

Specifies the fading level for unmodified entities.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 90
Default value:	80

## 6.73 CMPLOG system variable

### 6.73.1 DWGCOMPARE log control

Toggles the creation of DWGCOMPARE log report (cmplog) files by the DWGCOMPARE command.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't write cmplog files On (1): write cmplog files

## 6.74 COLORBOOKPATH system variable

### 6.74.1 Color book file search path

Specifies the folder(s) in which BricsCAD should look for color book files.

BricsCAD only

Type:	String
Saved in:	Registry



## 6.75 COLORTHEME system variable

### 6.75.1 UI color theme

Choose a dark or light color scheme for UI elements.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Dark color theme 1: Light color theme

## 6.76 COLORX system variable

### 6.76.1 X axis color

Specifies the color for the X-axis of the crosshairs. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	11

## 6.77 COLORY system variable

### 6.77.1 Y axis color

Specifies the color for the Y-axis of the crosshairs. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255



Default value:	112
----------------	-----

## 6.78 COLORZ system variable

### 6.78.1 Z axis color

Specifies the color for the Z-axis of the crosshairs.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	150

## 6.79 COMACADCOMPATIBILITY system variable

### 6.79.1 COM Acad compatibility

Use registry settings to make existing VB applications run with BricsCAD.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't use registry settings On (1): Use registry settings

## 6.80 COMBINETEXTMODE system variable

### 6.80.1 Options for COMBINETEXTMODE

Controls an order of text selection, word-wrap method and linespacing style for TXT2MTXT command.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 15
Default value:	11
Possible options:	1: Combine into a single mtext 2: Sort top-down 4: Word-wrap text 8: Uniform linespacing

## 6.81 COMMUNICATORPATH system variable

### 6.81.1 Communicator path

Specifies the folder where BricsCAD Communicator is installed.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	/Applications/Bricsys/Communicator/ (Mac) /opt/bricsys/communicator/ (Linux)

## 6.82 COMPASS system variable

### 6.82.1 Compass

Toggles the display of the 3D compass On/Off in the current viewport.

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): 3D Compass off On (1): 3D Compass on



## 6.83 COMPONENTS CONFIG system variable

### 6.83.1 Library panel configuration

Name of the active Library panel configuration file. This file contains which libraries are shown in the components panel. SRCHPATH is used for finding the file.

BricsCAD only

Type:	String
Saved in:	Workspace
Default value:	default.cct

## 6.84 COMPONENTSPATH system variable

### 6.84.1 Library directory path

Specifies the folder(s) in which BricsCAD should look for user created library files.

BricsCAD only

Type:	String
Saved in:	Registry

## 6.85 CONSTRAINTBARDISPLAY system variable

### 6.85.1 Constraint Bar Display

Specifies when the constraint bar will be displayed.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	3
Possible values:	1: Displays constraint bars when geometrical constraints are added. 2: Displays hidden constraint bars when constrained entities are selected.



## 6.86 CONTINUOUSMOTION system variable

### 6.86.1 Continuous motion

Specifies whether rotation continues after releasing the mouse when using the Realtime View Rotate command.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Disable continuous inertial motion in realtime On (1): Enable continuous inertial motion in realtime

## 6.87 COORDS system variable

### 6.87.1 Coordinates

Specifies the format and update frequency of the coordinate field in the status bar.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	1
Possible values:	0: Update coordinates only when selecting points 1: Coordinates always show pointer location 2: Coordinates in polar form for point, distance and angle selection 3: Coordinates in geographic form as latitude and longitude

## 6.88 COPYMODE system variable

### 6.88.1 Copy mode

Specifies whether the COPY command creates a single copy or multiple copies.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Repeat automatically 1: Create single copy

## 6.89 C PLOTSTYLE system variable

### 6.89.1 Current plot style

Specifies the plot style for new entities. In color-dependent mode drawings (PSTYLEMODE = 1), C PLOTSTYLE is set to "BYCOLOR" (Read-only). In named-plot-style mode drawings (PSTYLEMODE = 0), the options for C PLOTSTYLE are: "BYLAYER" (default), "BYBLOCK", "NORMAL" and "USER DEFINED". Use the CONVERTPSTYLES command to convert the current drawing to use named or color-dependent plot styles.

Type:	String
Saved in:	Drawing

## 6.90 C PROFILE system variable

### 6.90.1 Current profile

The name of the current user profile.

Read-only

Type:	String
Saved in:	Registry
Default value:	Default

## 6.91 CREATETHUMBNAILONTHEFLY system variable

### 6.91.1 Create preview thumbnail on the fly

Generates the preview thumbnail in the Open Dialog, if the drawing doesn't have prepared thumbnail (drawing was saved with RASTERPREVIEW set to 0).

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't create preview thumbnail on the fly On (1): Create preview thumbnail on the fly

## 6.92 CREATEVIEWPORTS system variable

### 6.92.1 Automatic viewport creation

Specifies whether a viewport will be created automatically for newly created layouts.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't create viewport for new layouts On (1): Create viewport for new layouts

## 6.93 CROSSHAIRDRAWMODE system variable

### 6.93.1 Crosshair rendering mode

Specifies the way the mouse cursor is rendered while inside the drawing window (crosshair, pickbox, etc.). If the value of CROSSHAIRDRAWMODE is 0, the crosshair is always rendered at window toolkit level. The sub-items enable a rendered cursor depending on visual style.

- In 2dwireframe, render the crosshair in OpenGL. Attempts to eliminate cursor duplicates or flickering, which may happen using the window toolkit.
- In RedSDK visual styles, render the crosshair by RedSDK. Rendering the cursor by RedSDK tends to be faster, but some old systems might not support it.

BricsCAD only

Type:	Short
Saved in:	Registry



Range:	0 to 3
Default value:	0 (Mac & Linux) 2 (Windows)
Possible values:	0: Always render crosshair at window toolkit level 1: Render crosshair in OpenGL, for 2d drawings 2: Render crosshair by RedSDK, for 3d drawings

## 6.94 CROSSINGAREACOLOR system variable

### 6.94.1 Crossing area color

Specifies the color for crossing selection areas. In effect only when SELECTIONAREA setting is on.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	91

## 6.95 CTAB system variable

### 6.95.1 Current tab

Stores the name of the current (model or layout) tab in the drawing. Allows to control which tab is active.

Type:	String
Saved in:	Drawing
Default value:	Model

## 6.96 CTABLESTYLE system variable

### 6.96.1 Current table style

Specifies the table style for new table entities.

Type:	String
-------	--------



Saved in:	Drawing
Default value:	Standard

## 6.97 CTRL3DMOUSE system variable

### 6.97.1 3D mouse mode

Specifies view navigation with 3Dconnexion 3D mouse.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Disable 3D mouse 1: Enable 3D mouse

## 6.98 CTRLMOUSE system variable

### 6.98.1 Mouse shortcuts

Toggles mouse shortcuts for several operations:

- Ctrl + Shift + Left button for realtime zoom.
- Ctrl + Shift + Right button for realtime pan.
- Ctrl + middle button for view rotation.
- Ctrl + right button for view rotation with fixed Z-axis.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1



Possible values:	0: Disable mouse shortcuts 1: Enable mouse shortcuts
------------------	---

## 6.99 CURORSIZE system variable

### 6.99.1 Crosshairs size

Specifies the crosshairs size as a percentage of the size of the screen.

Type:	Short
Saved in:	Registry
Range:	1 to 100
Default value:	3

## 6.100 CVPORT system variable

### 6.100.1 Current viewport

Stores the identification number of the current viewport. Change this value to change the current viewport on three conditions: (1) the identification number is that of an active viewport, (2) cursor movement in that viewport is not locked by a command in progress and (3) tablet mode is off.

Type:	Short
Saved in:	Drawing
Range:	1 or greater
Default value:	2



## 7. D

### 7.1 DATACOLLECTION system variable

#### 7.1.1 Diagnostics and usage data collection

Specifies whether you wish to share anonymous usage data to help to improve BricsCAD.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	-2 to 1
Default value:	-2
Possible values:	 -2: Not asked -1: Not set 0: Off 1: On

### 7.2 DATALINKNOTIFY system variable

#### 7.2.1 Notification of data links

Specifies the notification for updated or missing data links. Enables or disables data link notifications and balloon message notifications.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	 0: Disables data link update notification. 1: Enables data link notification. 2: Enables data link notification and balloon message notifications.



## 7.3 DATE system variable

### 7.3.1 Current date

Shows the current date and time in Julian Day format.

Read-only

Type:	Real
Saved in:	Not saved

## 7.4 DBCSTATE system variable

### 7.4.1 DbConnect state

Shows whether the dbConnect Manager is active or not.

Read-only

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display dbConnect Manager On (1): Display dbConnect Manager

## 7.5 DBCLKEDIT system variable

### 7.5.1 Double click editing

Specifies the double click editing behavior in the drawing area.

Type:	Boolean
Saved in:	Registry
Range:	On
Possible values:	Off (0): Disable double click editing On (1): Enable double click editing



## 7.6 DBMOD system variable

### 7.6.1 Modification status

Shows the status of the drawing modification as a bit-code.

Read-only

Type:	Short
Saved in:	Not saved
Possible values:	1: Object database modified 4: Database variable modified 8: Window modified 16: View modified 32: Field modified

## 7.7 DCTCUST system variable

### 7.7.1 Custom spelling dictionary

Stores the path and file name of the current custom spelling dictionary. During a spelling check, the SPELL command matches the words in the drawing or the current selection set to the words in the current main dictionary and the current custom dictionary. Custom dictionaries are used for discipline-specific words, such as medical or mechanical.

Type:	String
Saved in:	Registry

## 7.8 DCTMAIN system variable

### 7.8.1 Main spelling dictionary

Stores the file name of the current main spelling dictionary, which is supposed to sit in the support folder, therefore the full path is not shown. During a spelling check, the SPELL command matches the words in the drawing or the current selection set to the words in the current main dictionary and the current custom dictionary.

Type:	String
Saved in:	Registry



## 7.9 DEFAULTBSYSLIBIMPERIAL system variable

### 7.9.1 Default Bsystlib imperial

Default location of the Bsystlib library database when MEASUREMENT is 0 (imperial).

BricsCAD only

Type:	String
Saved in:	Preference

## 7.10 DEFAULTBSYSLIBMETRIC system variable

### 7.10.1 Default Bsystlib metric

Default location of the Bsystlib library database when MEASUREMENT is 1 (metric).

BricsCAD only

Type:	String
Saved in:	Preference

## 7.11 DEFAULTLIGHTING system variable

### 7.11.1 Default lighting

Specifies whether default lighting should be used always or only in case no other lights have been switched on. Default lighting consists of distant light that follows the view direction. This setting can be specified per viewport. When default lighting is used, it replaces all other light sources defined in the drawing.

Type:	Boolean
Saved in:	Drawing
Default value:	0
Possible values:	Off (0): Default lighting is used only in case no other lights are switched on On (1): Default lighting is used instead of the light sources defined in the drawing



## 7.12 DEFAULTCURVETYPEHA system variable

### 7.12.1 Default curve for horizontal alignments

Specifies the curve type to be used when create a new horizontal alignment or adding new PI.

BricsCAD only

Type:	Short
Saved in:	Drawing
Possible values:	-1: None 0: Auto Arc 1: Free Arc 2: Auto Spiral-Curve-Spiral 3: Free Spiral-Curve-Spiral

## 7.13 DEFAULTCURVETYPEVA system variable

### 7.13.1 Default curve for vertical alignments

Specifies the curve type to be used when create a new vertical alignment or adding new PVI.

BricsCAD only

Type:	Short
Saved in:	Drawing
Possible values:	-1: None 0: Auto Arc 1: Free Arc 2: Auto Parabola 3: Free Parabola

## 7.14 DEFAULTLIGHTSHADOWBLUR system variable

### 7.14.1 Default light shadow blur

Shadow blur amount for default light.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	1 to 40
Default value:	8

## 7.15 DEFAULTNEWSHEETTEMPLATE system variable

### 7.15.1 Default new sheet template

Specifies the default drawing template file (.dwg or .dwt) for new sheets.

BricsCAD only

Type:	String
Saved in:	Preference

## 7.16 DEFLPLSTYLE system variable

### 7.16.1 Default layer plot style

Specifies the default plot style for layer 0. In color-dependent mode drawings (PSTYLEMODE = 1), DEFLPLSTYLE is set to "BYCOLOR" (Read-only). In named-plot-style mode drawings (PSTYLEMODE = 0), DEFLPLSTYLE is set to "NORMAL" and can be changed. Use the CONVERTPSTYLES command to convert the current drawing to use named or color-dependent plot styles.

Type:	String
Saved in:	Registry

## 7.17 DEFPLSTYLE system variable

### 7.17.1 Default entity plot style

Specifies the default plot style for new entities. In color-dependent mode drawings (PSTYLEMODE = 1), DEFPLSTYLE is set to "BYCOLOR" (Read-only). In named-plot-style mode drawings (PSTYLEMODE = 0), DEFPLSTYLE is set to "NORMAL" and can be changed. Use the CONVERTPSTYLES command to convert the current drawing to use named or color-dependent plot styles.

Type:	String
Saved in:	Registry



## 7.18 DELETEINTERFERENCE system variable

### 7.18.1 Delete interference

Specifies whether interferences between source and other 3d solids are retained or resolved (i.e. source solids will be subtracted from any interfering solids).

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't solve interferences after commands On (1): Solve interferences after commands


## 7.19 DELETETOOL system variable

### 7.19.1 Delete tool

Specifies whether tool entities in command SUBTRACT are retained or deleted.

BricsCAD only

Type:	Boolean
Saved in:	Workspace
Default value:	On
Possible values:	Off (0): Don't delete tool entities in command SUBTRACT On (1): Delete tool entities in command SUBTRACT

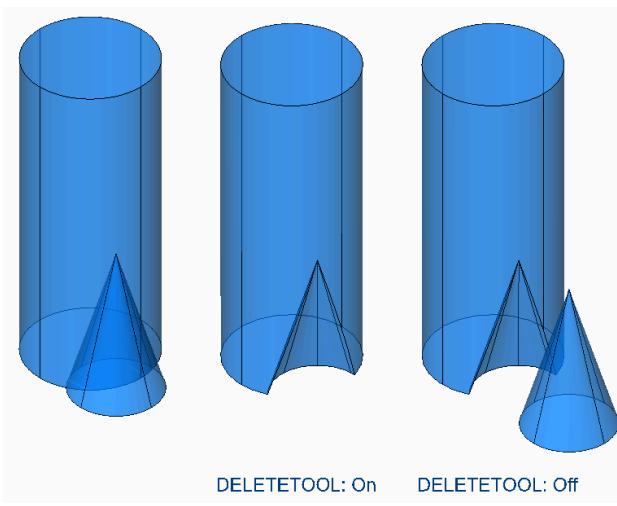

## 7.20 DELOBJ system variable

### 7.20.1 Delete entity

Specifies whether source entities used to create 3D entities are retained or deleted.

Type:	Short
Saved in:	Registry
Default value:	1
Possible values:	0: Retain defining entities 1: Delete profile entities 2: Delete all defining entities -1: Prompt to delete profile entities -2: Prompt to delete all defining entities (including paths and reference curves)

## 7.21 DEMANDLOAD system variable

### 7.21.1 Demand load

Specifies how BricsCAD interacts with custom entities created by a third-party application. If you set this system variable to 0, third-party applications and some BricsCAD commands cannot function.

Type:	Short
Saved in:	Registry
Range:	0 to 3



Default value:	3
Possible values:	1: Demand-load source application when opening a drawing that contains custom entities 2: Demand-load source application when invoking one of the application's commands

## 7.22 DETAILSPATH system variable

### 7.22.1 Details directory path

Specifies the folder(s) in which BricsCAD should look for user created detail files.

BricsCAD only

Type:	String
Saved in:	Registry

## 7.23 DGNEXPXREFMODE system variable

### 7.23.1 Export Conversion of Xrefs

Specifies conversion of references to xrefs. The dependent files themselves are not converted when exporting the parent. They must be converted separately.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	0
Possible values:	0: Convert reference to DGN 1: Keep reference to DWG 2: Bind reference file to the parent DGN 3: Detach xref

## 7.24 DGNFRAME system variable

### 7.24.1 DGN frame

Specifies if DGN frames in the current drawing are visible or plotted.



Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Hide DGN frames 1: Display and plot DGN frames 2: Display but do not plot DGN frames

## 7.25 DGNIMP2DCLOSEDBSPLINECURVEIMPORTMODE system variable

### 7.25.1 2D closed B-spline curve import mode

Specifies how to convert closed 2D B-Spline curve elements.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Convert to spline 1: Convert to region

## 7.26 DGNIMP2DELLIPSEIMPORTMODE system variable

### 7.26.1 2D ellipse import mode

Specifies how to convert 2D Ellipse elements.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1



Default value:	0
Possible values:	0: Convert to ellipse 1: Convert to region

## 7.27 DGNIMP2DSHAPEIMPORTMODE system variable

### 7.27.1 2D shape import mode

Specifies how to convert 2D Shape and 2D Complex Shape elements. If an element is filled, then a hatch is created as well as the result of importing.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: Convert to polyline 1: Convert to region 2: Convert to polyface mesh

## 7.28 DGNIMP3DCLOSEDBSPLINECURVEIMPORTMODE system variable

### 7.28.1 3D closed B-spline curve import mode

Specifies how to convert closed 3D B-Spline curve elements.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	1
Possible values:	0: Convert to spline 1: Convert to region



## 7.29 DGNIMP3DELLIPSEIMPORTMODE system variable

### 7.29.1 3D ellipse import mode

Specifies how to convert 3D Ellipse elements.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Convert to ellipse 1: Convert to region

## 7.30 DGNIMP3DOBJECTIMPORTMODE system variable

### 7.30.1 3D object import mode

Specifies how to convert 3D entities.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	1
Possible values:	0: Convert to polyface mesh 1: Convert to 3D Solid, Body or Surface

## 7.31 DGNIMP3DSHAPEIMPORTMODE system variable

### 7.31.1 3D shape import mode

Specifies how to convert 3D Shape and 3D Complex Shape elements. If an element is filled, then a hatch is created as well as the result of importing.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	1
Possible values:	0: Convert to polyline 1: Convert to region 2: Convert to polyface mesh

## 7.32 DGNIMPBREAKDIMENSIONASSOCIATION system variable

### 7.32.1 Break dimension association

Specifies if dimensions lose their associativity upon import. If on, then dgn dimension associations are broken in the dwg.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't break dimension associations On (1): Break dimension associations

## 7.33 DGNIMP CONVERTDGN COLORINDEXESTOTRUECOLORS system variable

### 7.33.1 Convert DGN color indices to true colors

Specifies how Microstation colors are mapped to BricsCAD colors. Microstation assigns color numbers to colors that are different from BricsCAD. If on, then BricsCAD converts dgn color indexes to RGB true colors. Otherwise it tries to convert dgn color indices to dwg color indices. BricsCAD gets the color from the dgn color table and tries to find the same color in dwg color table. If it is not possible, then the color will be saved as an RGB true color to the dwg file.

BricsCAD only

Type:	Boolean
-------	---------



Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Convert DGN color indices to DWG color indices On (1): Convert DGN color indices to RGB true colors

## 7.34 DGNIMPCONVERTEMPTYDATAFIELDSSTOSPACES system variable

### 7.34.1 Convert empty data fields to spaces

Specifies how empty field values are handled. If on, then empty field values from a dgn file are replaced by space symbols in the dwg file. Otherwise empty field values from a dgn file are replaced by underscore symbols ("\_") in the dwg file.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Replace by underscore symbols ("_") On (1): Replace by space symbols

## 7.35 DGNIMPERASEUNUSEDRESOURCES system variable

### 7.35.1 Erase unused resources

Specifies if unreferenced elements, such as text styles and linetypes, are imported or deleted.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Import unreferenced elements. On (1): Erase unreferenced imported items



## 7.36 DGNIMPEXplodeTextNodes system variable

### 7.36.1 Explode text nodes

Specifies how to handle text nodes (empty text fields). If on, imported dgn text nodes are converted to simple entities (text, line, etc.). Otherwise they are converted to multiline text. Microstation uses text nodes as empty fields that are used to reserve space for text that will be added later so the length of the text is not yet known.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Convert text nodes to multiline text On (1): Convert text nodes to simple entities, such as text and lines

## 7.37 DGNIMPIMPORTACTIVEMODELTOModelSpace system variable

### 7.37.1 Import active model to Model Space

Specifies how active spaces are handled. If on, BricsCAD imports the active dgn model to dwg Model Space. Otherwise BricsCAD imports the first dgn design model from the model table to the dwg Model Space. Microstation uses the phrase "design model" for model space, and "active model" for the current view of a model.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Import the first design model from the model table to the model space On (1): Import the active model to model space



## 7.38 DGNIMPIMPORTINVISIBLEELEMENTS system variable

### 7.38.1 Import invisible elements

Specifies how invisible elements (entities) are handled. If on, BricsCAD imports invisible dgn elements as invisible entities. Otherwise they are skipped.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Skip invisible elements On (1): Import invisible elements

## 7.39 DGNIMPIMPORTPAPERSPACEMODELS system variable

### 7.39.1 Import Paper Space models

Specifies whether to import sheet models (paper space). If on, all dgn sheet models are imported to the Paper Space layouts. Otherwise sheet models are not imported. Microstation uses the phrase "sheet model" for paper space.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't import sheet models On (1): Import sheet models to paper space layouts

## 7.40 DGNIMPIMPORTVIEWINDEX system variable

### 7.40.1 Import view index

Specifies the number of dgn views to use level masks and dgn view settings. If the view number is "-1", then the view is not defined, and view settings and level masks are not used. Microstation uses the word "level" for layers; a "mask" hides content in areas or levels/layers.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	-1 to 7
Default value:	-1
Possible values:	-1: View is not defined 1 to 7: Specifies level mask

## 7.41 DGNIMPRECOMPUTEDIMENSIONS AFTERRIMPORT system variable

### 7.41.1 Recompute dimensions after import

Specifies how to handle imported dimensions. If on, BricsCAD will re-compute all dimensions to create dwg-based dimension geometry blocks; otherwise it will create dgn-based dimension geometry blocks.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): create DGN-style dimension geometry blocks On (1): re-compute all dimensions to create DWG dimension geometry blocks

## 7.42 DGNIMP\_SYMBOLRESOURCES FILES system variable

### 7.42.1 Symbol resource files

Specifies the paths to folders holding DGN and RSC files. Microstation uses RSC resource files to store fonts, line styles, and so on. (analog to MS\_SYMBRSRC MicroStation setting).

BricsCAD only

Type:	String
Saved in:	Preference



## 7.43 DGNIMPXREFIMPORTMODE system variable

### 7.43.1 External references import mode

Specifies how to import dgn reference attachments. The options are "Omit" - don't import dgn reference attachments; "Retain" - convert attached dgn files to dwg and create dwg Xref; "Merge to cell" - create block definition and import attached dgn file to it, then create block reference to dgn attachment block; "Create DGN Underlay" - create DGN Underlay object.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	2
Possible values:	0: Omit 1: Retain 2: Merge to cell 3: Create DGN Underlay

## 7.44 DGNOSNAP system variable

### 7.44.1 Dgn entity snap

Enable snapping to entities in DGN underlay files.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Disable DGN entity snap On (1): Enable DGN entity snap

## 7.45 DIASTAT system variable

### 7.45.1 Dialog state

Shows how the user exited the most recently used dialog box.

Read-only



Type:	Boolean
Saved in:	Not saved
Possible values:	Off (0): Cancel On (1): OK

## 7.46 DIMADEC system variable

### 7.46.1 Dim angle precision

Specifies the display precision for angular dimensions. Values between -1 and 8 are accepted. If -1 is entered, DIMADEC is initialized with the value of the DIMDEC setting. Values 0 to 8 specify the number of decimal places for angular dimensions, independent of DIMDEC.

Type:	Short
Saved in:	Drawing
Range:	-1 to 8
Default value:	0
Possible values:	-1: Use DIMDEC setting 0 - 8: Decimal places

## 7.47 DIMALT system variable

### 7.47.1 Alt units

Enables alternate units in dimensions.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Disable alternate units On (1): Enable alternate units



## 7.48 DIMALTD system variable

### 7.48.1 Alt precision

Specifies the display precision for the alternate dimension units.

Type:	Short
Saved in:	Drawing
Range:	0 to 8
Default value:	3

## 7.49 DIMALTF system variable

### 7.49.1 Alt multiplier

Specifies the multiplier for alternate units. If DIMALT is on, linear dimensions are multiplied by DIMALTF to provide an alternate linear dimension. E.g. if one drawing unit equals 1 inch, and DIMALTF=25.4, alternate linear dimensions are expressed in mm.

Type:	Real
Saved in:	Drawing
Default value:	0.0394

## 7.50 DIMALTRND system variable

### 7.50.1 Alt roundoff

Specifies the roundoff rules for alternate units.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 7.51 DIMALTTD system variable

### 7.51.1 Alt tolerance precision

Specifies the tolerance precision in the alternate dimension units.



Type:	Short
Saved in:	Drawing
Range:	0 to 8
Default value:	3

## 7.52 DIMALTTZ system variable

### 7.52.1 Alt tolerance suppress zeros

Specifies the suppression of zeros in tolerance values.

Type:	Boolean
Saved in:	Drawing
Default value:	0
Possible values:	0: Suppress zero feet and precisely zero inches 1: Include zero feet and precisely zero inches 2: Include zero feet and suppress zero inches 3: Suppress zero feet and include zero inches 4: Suppress leading zeros in decimal dimensions 8: Suppress trailing zeros in decimal dimensions

## 7.53 DIMALTU system variable

### 7.53.1 Alt unit type

Specifies the alternate unit type for linear dimensions.

Type:	Short
Saved in:	Drawing
Range:	1 to 8
Default value:	2



Possible values:	1: Scientific 2: Decimal 3: Engineering 4: Architectural (stacked) 5: Fractional (stacked) 6: Architectural 7: Fractional 8: Windows control panel
------------------	---

## 7.54 DIMALTZ system variable

### 7.54.1 Alt suppress zeros

Suppresses leading and/or trailing zeros in alternate unit dimension values.

Type:	Short
Saved in:	Drawing
Range:	0 to 12
Default value:	0
Possible values:	0: Suppress zero feet and precisely zero inches 1: Include zero feet and precisely zero inches 2: Include zero feet and suppress zero inches 3: Suppress zero feet and include zero inches 4: Suppress leading zeros in decimal dimensions 8: Suppress trailing zeros in decimal dimensions

## 7.55 DIMANNO system variable

### 7.55.1 Style is annotative

Indicates if the current dimension style is annotative.

Read-only

Type:	Boolean
Saved in:	Drawing



## 7.56 DIMAPOST system variable

### 7.56.1 Alt units prefix/suffix

Specifies a prefix and/or suffix that to appear in the alternate dimension text. The general format is just the suffix string or 'prefix[]suffix'. DIMAPOST does not apply to angular dimensions. In the DimStyle explorer the variable is split up into Alt Prefix and Alt Suffix for editing.

Type:	String
Saved in:	Drawing

## 7.57 DIMARCSYM system variable

### 7.57.1 Arc symbol

Specifies how the arc length symbol displays in an arc dimension.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: Arc length symbol is placed before the dimension text 1: Arc length symbol is placed above the dimension text 2: The display of the arc length symbol is suppressed

## 7.58 DIMASO system variable

### 7.58.1 Associativity (Obsolete)

Replaced by DIMASSOC. Has no effect except to preserve the integrity of scripts.

Type:	Boolean
Saved in:	Drawing
Default value:	On



## 7.59 DIMASSOC system variable

### 7.59.1 Associativity

Specifies the associativity of dimension entities or whether they are exploded.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Exploded dimensions 1: Non-associative dimension entities 2: Associative dimension entities

## 7.60 DIMASZ system variable

### 7.60.1 Arrow size

Specifies the size of arrowheads of dimension lines and leader lines.

Type:	Real
Saved in:	Drawing
Default value:	0.18

## 7.61 DIMATFIT system variable

### 7.61.1 Arrow and text fit

Specifies how dimension text and arrows are arranged when there is insufficient place within the extension lines. When DIMTMOVE=1, a leader is added if the dimension text is placed outside.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	3



Possible values:	0: Place both text and arrows outside extension lines 1: Move arrows first, then text 2: Move text first, then arrows 3: Move either text or arrows, whichever fits best
------------------	---

## 7.62 DIMAUNIT system variable

### 7.62.1 Dim angle units

Specifies angular dimensions unit type.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	0
Possible values:	0: Decimal degrees 1: Degrees/minutes/seconds 2: Gradians 3: Radians

## 7.63 DIMAZIN system variable

### 7.63.1 Suppress angle zeros

Suppresses leading and/or trailing zeros for angular dimensions. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	0
Possible options:	1: Suppress leading zeros 2: Suppress trailing zeros



## 7.64 DIMBLK system variable

### 7.64.1 Arrow

Specifies the name of the block displayed at the ends of dimension lines and leader lines. The block name can be either a standard name or refer to a user-defined arrowhead block.

Type:	String
Saved in:	Drawing

## 7.65 DIMBLK1 system variable

### 7.65.1 Arrow 1

Specifies the name of the block displayed at the first end of dimension line when DIMSAH is on (= use different blocks for the first and the second arrowhead).

Type:	String
Saved in:	Drawing

## 7.66 DIMBLK2 system variable

### 7.66.1 Arrow 2

Specifies the name of the block displayed at the second end of dimension line when DIMSAH is on (= use different blocks for the first and the second arrowhead).

Type:	String
Saved in:	Drawing

## 7.67 DIMCEN system variable

### 7.67.1 Center mark

Specifies if and how center marks and centerlines of circles and arcs are drawn by DIMCENTER, DIMDIAMETER and DIMRADIUS commands. Set to zero for no center mark, negative for Line or positive for Mark. The DIMCEN system variable also controls the length of center mark lines and size of the center marks.

Type:	Real
-------	------



Saved in:	Drawing
Default value:	0.09
Possible values:	0: None <0: Line >0: Mark

## 7.68 DIMCLRD system variable

### 7.68.1 Dim line color

Specifies the color for dimension lines, arrowheads and dimension leader lines.

Type:	Short
Saved in:	Drawing
Range:	0 to 256
Default value:	0
Possible values:	0: ByBlock 1 - 255: index 256: ByLayer

## 7.69 DIMCLRE system variable

### 7.69.1 Ext line color

Specifies the color for dimension extension lines.

Type:	Short
Saved in:	Drawing
Range:	0 to 256
Default value:	0
Possible values:	0: ByBlock 1 - 255: index 256: ByLayer



## 7.70 DIMCLRT system variable

### 7.70.1 Text color

Specifies the color for dimension text.

Type:	Short
Saved in:	Drawing
Range:	0 to 256
Default value:	0
Possible values:	0: ByBlock 1 - 255: index 256: ByLayer

## 7.71 DIMDEC system variable

### 7.71.1 Dim precision

Specifies the display precision for the primary dimension units.

Type:	Short
Saved in:	Drawing
Range:	0 to 8
Default value:	4

## 7.72 DIMDLE system variable

### 7.72.1 Dim line ext

Specifies the extension of the dimension line beyond the extension lines in case obliques or architectural ticks are drawn instead of arrowheads.

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 7.73 DIMDLI system variable

### 7.73.1 Dim baseline spacing

Specifies the spacing between dimension lines in baseline dimensions.

Type:	Real
Saved in:	Drawing
Default value:	3.8

## 7.74 DIMDSEP system variable

### 7.74.1 Decimal separator

Specifies a new decimal separator character.

Type:	String
Saved in:	Drawing

## 7.75 DIMEXE system variable

### 7.75.1 Ext line ext

Specifies the extension of the extension lines beyond the dimension line.

Type:	Real
Saved in:	Drawing
Default value:	.18

## 7.76 DIMEXO system variable

### 7.76.1 Ext line offset

Specifies the offset of extension lines from the origin points.

Type:	Real
Saved in:	Drawing
Default value:	0.625



## 7.77 DIMFIT system variable

### 7.77.1 Dimension text fit (Obsolete)

Replaced by DIMATFIT and DIMTMOVE.

Type:	Short
Saved in:	Drawing
Default value:	3

## 7.78 DIMFRAC system variable

### 7.78.1 Fractional type

Specifies the fraction format for Architectural (DIMLUNIT = 4) or Fractional (DIMLUNIT = 5) linear dimensions.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: Horizontal 1: Diagonal 2: Not stacked

## 7.79 DIMFXL system variable

### 7.79.1 Ext line fixed length

Specifies the total length of the extension lines.

Type:	Real
Saved in:	Drawing
Default value:	1.0



## 7.80 DIMFXLON system variable

### 7.80.1 Ext line fixed

Specifies whether extension lines are set to a fixed length.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't use fixed length extension lines On (1): Use fixed length extension lines

## 7.81 DIMGAP system variable

### 7.81.1 Text offset

Specifies the offset distance around the dimension text and the distance between annotation and hook line created using the LEADER command. A negative value for DIMGAP draws a box around the dimension or annotation text.


Type:	Real
Saved in:	Drawing
Default value:	0.09

## 7.82 DIMJOGANG system variable

### 7.82.1 Jogged angle

Specifies the angle of the oblique dimension line segment in jogged radius dimensions. Jogged radius dimensions are often created when the center point is located off the page.

Type:	Real
Saved in:	Drawing
Default value:	45.0

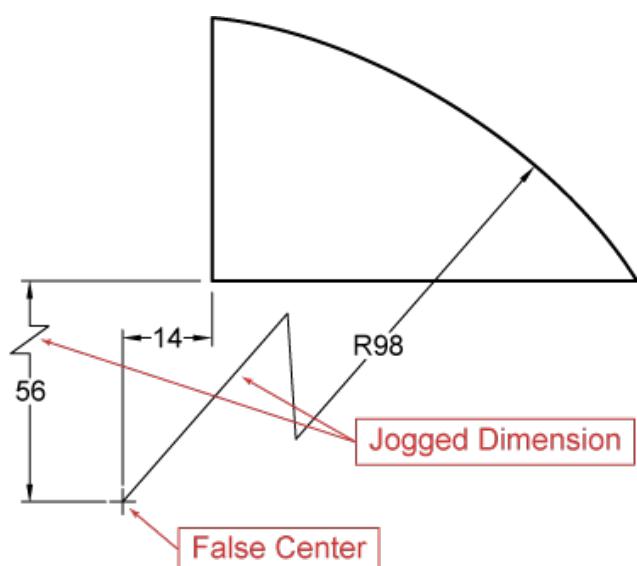

## 7.83 DIMJUST system variable

### 7.83.1 Horizontal text position

Specifies the horizontal position of dimension text, with respect to the extension lines.

Type:	Short
Saved in:	Drawing
Range:	0 to 4
Default value:	0
Possible values:	0: Text above the dimension line and center-justified between extension lines 1: Text next to the first extension line 2: Text next to the second extension line 3: Text above and aligned with the first extension line 4: Text above and aligned with the second extension line

## 7.84 DIMAYER system variable

### 7.84.1 Default layer for new dimensions

Specifies a default layer for new dimensions.

Type:	String
-------	--------



Saved in:	Drawing
Default value:	.

## 7.85 DIMLDRBLK system variable

### 7.85.1 Leader arrow

Specifies the arrowhead block for leaders.

Type:	String
Saved in:	Drawing

## 7.86 DIMLFAC system variable

### 7.86.1 Dim scale linear

Specifies the scale factor for linear dimensions. Linear dimensions (incl. radius, diameter and ordinate dimensions), are multiplied by DIMLFAC. Positive values apply to dimensions in both model space and paper space; negative values apply to paper space dimensions only.

Type:	Real
Saved in:	Drawing
Default value:	1.0

## 7.87 DIMLIM system variable

### 7.87.1 Tolerance method

Specifies the default text to dimension limits. If DIMLIM is On, DIMTOL is switched Off.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't generate dimension limits as default text On (1): Generate dimension limits as default text



## 7.88 DIMTEX1 system variable

### 7.88.1 Ext line 1 linetype

Specifies the linetype for the first extension line.

Type:	String
Saved in:	Drawing

## 7.89 DIMTEX2 system variable

### 7.89.1 Ext line 2 linetype

Specifies the linetype for the second extension line.

Type:	String
Saved in:	Drawing

## 7.90 DIMLTYPE system variable

### 7.90.1 Dim line linetype

Specifies the linetype for the dimension line.

Type:	String
Saved in:	Drawing

## 7.91 DIMLUNIT system variable

### 7.91.1 Dim units

Specifies the primary unit type for linear dimensions.

Type:	Short
Saved in:	Drawing
Range:	1 to 6
Default value:	2



Possible values:	1: Scientific 2: Decimal 3: Engineering 4: Architectural 5: Fractional 6: Windows control panel
------------------	--

## 7.92 DIMLWD system variable

### 7.92.1 Dim line linewidth

Specifies the linewidth of dimension lines.

Type:	Short
Saved in:	Drawing
Range:	-3 to 211
Default value:	Bylayer
Possible values:	-3: Default (defined by LWDEFAULT) -2: ByBlock -1: ByLayer 0 - 211: Lineweight value in hundredths of millimeters

## 7.93 DIMLWE system variable

### 7.93.1 Ext line LW

Specifies the linewidth of extension lines.

Type:	Short
Saved in:	Drawing
Range:	-3 to 211
Default value:	Bylayer



Possible values:	-3: Default (defined by LWDEFAULT) -2: ByBlock -1: ByLayer 0 - 211: Lineweight value in hundredths of millimeters
------------------	--

## 7.94 DIMPOST system variable

### 7.94.1 Dim prefix/suffix

Specifies a prefix and/or suffix to be added to the dimension text. The general format is just the suffix string or 'prefix <> suffix'. A single linefeed can be inserted with '\\X' (often when alternate units are active). In the DimStyle explorer the variable is split into Dim Prefix and Dim Suffix for editing.

Type:	String
Saved in:	Drawing

## 7.95 DIMRND system variable

### 7.95.1 Dim round

Specifies the roundoff rules for linear dimensions. E.g. set DIMRND to 0.1 if you want to round all distances to the nearest 0.1 unit. Set DIMRND to 1 if you want to round distances to the nearest integer. Remember the number of decimal places is limited by DIMDEC. Angular dimensions are not affected by DIMRND.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 7.96 DIMSAH system variable

### 7.96.1 Arrowheads

Specifies whether dimension line arrowhead blocks are set by DIMBLK or by DIMBLK1 and DIMBLK2. If=0: use the same block for the first and the second arrowhead. The arrowhead block is then defined by DIMBLK. If=1: use different blocks for the first and the second arrowhead. The arrowhead blocks are defined by DIMBLK1 and DIMBLK2

Type:	Boolean
-------	---------



Saved in:	Drawing
Default value:	0
Possible values:	Off (0): Arrowhead blocks set by DIMBLK On (1): Arrowhead blocks set by DIMBLK1 and DIMBLK2

## 7.97 DIMSCALE system variable

### 7.97.1 Dim scale overall

Specifies the scale factor applied to all dimensioning variables that specify the size of the components of dimension entities, such as text height, distances or offsets. DIMSCALE does not affect measured lengths, coordinates, or angles.

Type:	Real
Saved in:	Drawing
Range:	0 or greater
Default value:	1.0

## 7.98 DIMSD1 system variable

### 7.98.1 Dim line 1

Suppresses the display of the first part of the dimension line: from the first extension line to the text origin.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't suppress first dimension line On (1): Suppress first dimension line



## 7.99 DIMSD2 system variable

### 7.99.1 Dim line 2

Suppresses the display of second part of the dimension line: from the text origin to the second extension line.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't suppress second dimension line On (1): Suppress second dimension line

## 7.100 DIMSE1 system variable

### 7.100.1 Ext line 1

Suppresses the display of the first extension line.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't suppress first extension line On (1): Suppress first extension line

## 7.101 DIMSE2 system variable

### 7.101.1 Ext line 2

Suppresses the display of the second extension line.

Type:	Boolean
Saved in:	Drawing
Default value:	Off



Possible values:	Off (0): Don't suppress second extension line On (1): Suppress second extension line
------------------	---

## 7.102 DIMSHO system variable

### 7.102.1 Dimension show (Obsolete)

Specifies redefinition of dimension entities while dragging. Has no effect except to preserve the integrity of scripts.

Type:	Boolean
Saved in:	Drawing
Default value:	On

## 7.103 DIMSOXD system variable

### 7.103.1 Dim line inside

Suppresses arrowheads outside the extension lines if there is insufficient room inside the extension lines and if DIMTIX is on. If DINTIX is off, DIMSOXD had no effect.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't suppress outside arrowheads On (1): Suppress outside arrowheads

## 7.104 DIMSTYLE system variable

### 7.104.1 Dimension style

Shows the current dimension style.

Read-only

Type:	String
Saved in:	Drawing



Default value:	Standard
----------------	----------

## 7.105 DIMTAD system variable

### 7.105.1 Vertical text position

Specifies the vertical position of text with respect to the dimension line. If DIMTAD=1 (Above dimension line), the distance from the dimension line is set by DIMGAP.

Type:	Short
Saved in:	Drawing
Range:	0 to 4
Default value:	0
Possible values:	0: Centered between extension lines 1: Above dimension line, unless DIMTIH is 1 and the dimension line is not horizontal 2: Farthest from defining points 3: Japanese Industrial Standards 4: Below dimension line

## 7.106 DIMTDEC system variable

### 7.106.1 Tolerance precision

Specifies the number of decimal places for tolerance values in the primary dimension units.

Type:	Short
Saved in:	Drawing
Range:	0 to 8
Default value:	4

## 7.107 DIMTFAC system variable

### 7.107.1 Tolerance text height

Specifies the scale factor to calculate the text height for dimension fractions and tolerances, relative to the dimension text height, as set by DIMTXT. Only applies if DIMLUNIT=Fractional.



Type:	Real
Saved in:	Drawing
Default value:	1.0

## 7.108 DIMTFILL system variable

### 7.108.1 Text fill

Specifies the dimension text background.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: No background or fill 1: Background or fill color matches the background of the drawing window 2: Background or fill color matches the value specified by DIMTFILLCLR

## 7.109 DIMTFILLCLR system variable

### 7.109.1 Text fill color

Specifies the dimension text background color when DIMTFILL is set to 2.

Type:	Short
Saved in:	Drawing
Range:	0 to 256
Default value:	0
Possible values:	0: ByBlock 1-255: index 256: ByLayer



## 7.110 DIMTIH system variable

### 7.110.1 Text inside align

Specifies the position of dimension text inside the extension lines. DIMTIH does not apply to ordinate dimensions.

Type:	Boolean
Saved in:	Drawing
Default value:	1
Possible values:	Off (0): Aligned with dimension line On (1): Horizontal

## 7.111 DIMTIX system variable

### 7.111.1 Text inside

Draws text between extension lines, even if there is insufficient room. DIMTIX does not apply to radius and diameter dimensions.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't force text between extension lines On (1): Force text between extension lines

## 7.112 DIMTM system variable

### 7.112.1 Tolerance limit lower

Specifies the minimum (lower) tolerance limit for dimension text when DIMTOL or DIMLIM is on.

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 7.113 DIMMOVE system variable

### 7.113.1 Text movement

Specifies how dimension text can move.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: Move dimension line with dimension text 1: Add leader when dimension text is moved 2: Allow text to be moved freely without a leader

## 7.114 DIMTOFL system variable

### 7.114.1 Dim line forced

Specifies whether a dimension line is drawn between the extension lines even when the text is placed outside.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't force dimension lines even when text is outside On (1): Force dimension lines even when text is outside

## 7.115 DIMTOH system variable

### 7.115.1 Text outside align

Forces the dimension text outside the extension lines to be placed horizontally.

Type:	Boolean
Saved in:	Drawing



Default value:	1
Possible values:	Off (0): Aligned with dimension line On (1): Horizontal

## 7.116 DIMTOL system variable

### 7.116.1 Tolerance display

Adds tolerances to dimension text.

Type:	Boolean
Saved in:	Drawing
Range:	
Default value:	Off
Possible values:	Off (0): Don't display tolerance On (1): Display tolerance

## 7.117 DIMTOLJ system variable

### 7.117.1 Tolerance pos vert

Specifies the vertical position for tolerance values relative to the primary dimension text.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	1
Possible values:	0: Bottom 1: Middle 2: Top



## 7.118 DIMTP system variable

### 7.118.1 Tolerance limit upper

Specifies the maximum (upper) tolerance limit for dimension text when DIMTOL or DIMLIM is on.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 7.119 DIMTSZ system variable

### 7.119.1 Dim tick size

Specifies the size of tick marks drawn instead of arrowheads for linear, radius and diameter dimensioning. If the value is zero, arrowheads are drawn.

Type:	Real
Saved in:	Drawing
Default value:	0.0
Possible values:	0: Draw arrowheads >0: Draw oblique strokes instead of arrowheads

## 7.120 DIMTVP system variable

### 7.120.1 Text offset vert

Specifies the vertical position of dimension text above or below the dimension line when DIMTAD=0. The offset equals the product of DIMTVP and the height of the dimension text (DIMTXT). Setting DIMTVP to 1.0 is equivalent to DIMTAD=1

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 7.121 DIMTXSTY system variable

### 7.121.1 Text style

Specifies the style of the dimension text.

Type:	String
Saved in:	Drawing
Default value:	Standard

## 7.122 DIMTXT system variable

### 7.122.1 Text height

Specifies the dimension text height if the text style as defined in DIMTXSTY has no fixed height.

Type:	Real
Saved in:	Drawing
Default value:	.18

## 7.123 DIMXTDIRECTION system variable

### 7.123.1 Text direction

Specifies the dimension text reading direction.

Type:	Boolean
Saved in:	Drawing
Default value:	0
Possible values:	Off (0): Left to right On (1): Right to left

## 7.124 DIMTZIN system variable

### 7.124.1 Tolerance suppress zeros

Specifies the suppression of zeros in tolerance values. The value is stored as a bitcode using the sum of the values of all selected options.



Type:	Short
Saved in:	Drawing
Range:	0 to 15
Default value:	0
Possible options:	0: Suppress zero feet and precisely zero inches 1: Include zero feet and precisely zero inches 2: Include zero feet and suppress zero inches 3: Suppress zero feet and include zero inches 4: Suppress leading zeros in decimal dimensions 8: Suppress trailing zeros in decimal dimensions

## 7.125 DIMUNIT system variable

### 7.125.1 Dim unit type (Obsolete)

Replaced by DIMLUNIT and DIMFRAC.

Type:	Short
Saved in:	Drawing
Range:	1 to 8
Default value:	2
Possible values:	1: Scientific 2: Decimal 3: Engineering 4: Architectural (stacked) 5: Fractional (stacked) 6: Architectural 7: Fractional 8: Windows control panel

## 7.126 DIMUPT system variable

### 7.126.1 Place text manually

Allows user-positioned text.



Type:	Boolean
Saved in:	Drawing
Default value:	0
Possible values:	Off (0): Cursor controls only the dimension line location On (1): Cursor controls both the text position and the dimension line location

## 7.127 DIMZIN system variable

### 7.127.1 Suppress dim zeros

Suppresses leading and/or trailing zeros in the primary unit. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 15
Default value:	0
Possible options:	0: Suppress zero feet and precisely zero inches 1: Include zero feet and precisely zero inches 2: Include zero feet and suppress zero inches 3: Suppress zero feet and include zero inches 4: Suppress leading zeros in decimal dimensions 8: Suppress trailing zeros in decimal dimensions

## 7.128 DISPLAYAXES system variable

### 7.128.1 Display Axes

Controls the display of the axis of linear structural elements such beams and columns.

BricsCAD only

Type:	Boolean
Saved in:	Drawing



Default value:	Off
Possible options:	Off (0): Do not display axes On (1): Display axes

## 7.129 DISPLAYSCALING system variable

### 7.129.1 Automatic display scaling

Current display scaling percentage (from system display settings).

BricsCAD only

Read-only

Type:	Short
Saved in:	Not saved
Range:	50 to 1000
Default value:	100

## 7.130 DISPLAYSIDESANDENDS system variable

### 7.130.1 Display sides and ends

When ON, the sides and ends of linear solids highlight on hovering if the Quad is ON or bitcode 1 of the SELECTIONPREVIEW system variable is selected. The variable is available in the BIM and Ultimate license level only.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display sides and ends On (1): Display side and ends



## 7.131 DISPLAYSNAPMARKERINALLVIEWS system variable

### 7.131.1 Snap marker in all views

Specifies whether the snap marker displays in all viewports.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't display snap marker in all views On (1): Display snap marker in all views

## 7.132 DISPLAYTOOLTIPS system variable

### 7.132.1 Snap tooltips

Toggles the display of snap tooltips On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable snap tooltips On (1): Enable snap tooltips

## 7.133 DISPPAPERBKG system variable

### 7.133.1 Paper background

Enables or disables displaying of paper sheet in paper space.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't display paper background On (1): Display paper background
------------------	---

## 7.134 DISPPAPERMARGINS system variable

### 7.134.1 Printable area

Enables or disables displaying of printable area of a drawing.

BricsCAD only


Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display printable area On (1): Display printable area

## 7.135 DISPSILH system variable

### 7.135.1 Display silhouette curves

Specifies the display of silhouette curves of solid entities in Wireframe modes (2D and 3D) and whether a mesh is drawn or not when a solid entity is hidden in 2D Wireframe mode. To view changes on existing entities, perform a REGEN.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display silhouette curves On (1): Display silhouette curves

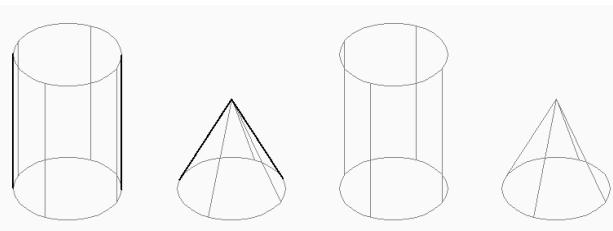



## 7.136 DISTANCE system variable

### 7.136.1 Distance

Specifies the last calculated distance by the DIST command.

Read-only

Type:	Real
Saved in:	Not saved

## 7.137 DMAUDITLEVEL system variable

### 7.137.1 DMAUDIT command, level of details

Specifies whether certain types of errors are reported by the DMAUDIT command. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 3
Default value:	1
Possible options:	1: Ignore dynamic range errors 2: Ignore sliver faces

## 7.138 DMAUTOUPDATE system variable

### 7.138.1 3D constraints recalculation mode

Specifies if a model automatically updates when 3D constraints are added or edited. If this setting is switched off, command DMUPDATE must be used to update the model.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't update 3D constraints automatically On (1): Update 3D constraints automatically
------------------	---

## 7.139 DMCONNECTIONCUTTYPE system variable

### 7.139.1 Connection type

Specifies the type of connection.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Smooth 1: Planar

## 7.140 DMEXTRUDEMODE system variable

### 7.140.1 Extrude mode

Specifies behavior of Auto option in DMEXTRUDE. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 7
Default value:	0
Possible options:	1: Set OFF to Unite with, or ON to create new solid when extruding a contour lying on a solid's face, away from that solid. 2: Set OFF to Unite with, or ON to subtract from solids which intersect with the created volume. 4: Set ON to not modify solids which intersect with the created volume.



## 7.141 DMPUSHPULLSUBTRACT system variable

### 7.141.1 DMPUSHPULL subtract

Specifies if a solid that intersects with other solids during a PUSH/PULL operation subtracts from the existing solid.

BricsCAD only

Type:	Boolean
Saved in:	Workspace
Range:	0 to 1
Default value:	Off
Possible values:	Off (0): Disable DMPUSHPULL subtract On (1): Enable DMPUSHPULL subtract

## 7.142 DMRECOGNIZE system variable

### 7.142.1 Automatic 3D geometry constraints recognition

Specifies which geometrical relations between the surfaces are maintained direct modeling operations.

The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Drawing
Range:	-1 to 508
Default value:	0



Possible options:	Negative: Switch off automatic 3D geometry constraints recognition 1: Tangent surfaces 2: Coincident planes 4: Parallel planes 8: Perpendicular planes 16: Cylinders perpendicular to planes 32: Coaxial surfaces 64: Cylinders and spheres of equal radius 128: Vertices between 4 or more faces 256: Edges between coincident faces
-------------------	--

## 7.143 DOCKPRIORITY system variable

### 7.143.1 Docking Priority

Specifies the docking priority of top, left, right and bottom docking bars. Changing this preference will take effect only after restarting the application.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 14
Default value:	1
Possible values:	1: Top, Left, Right, Bottom 2: Top, Bottom, Left, Right 3: Top, Left, Bottom, Right 4: Top, Right, Bottom, Left 5: Left, Right, Top, Bottom 6: Left, Top, Bottom, Right 7: Left, Top, Right, Bottom 8: Left, Bottom, Right, Top 9: Right, Top, Left, Bottom 10: Right, Bottom, Left, Top 11: Right, Top, Bottom, Left 12: Bottom, Left, Right, Top 13: Bottom, Left, Top, Right 14: Bottom, Right, Top, Left



## 7.144 DOCTABPOSITION system variable

### 7.144.1 Tabs position

Specifies where to display the document tab control.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	0
Possible values:	0: Top 1: Bottom 2: Left 3: Right

## 7.145 DONUTID system variable

### 7.145.1 Donut inside diameter

Stores the default inside diameter of a donut.

Type:	Real
Saved in:	Not saved
Default value:	0.5

## 7.146 DONUTOD system variable

### 7.146.1 Donut outside diameter

Stores the default outside diameter of a donut.

Type:	Real
Saved in:	Not saved
Default value:	1.0



## 7.147 DRAGMODE system variable

### 7.147.1 Entity dragging

Specifies whether entities display dynamically, e.g. when moved or copied.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: No dragging 1: When requested 2: Whenever possible

## 7.148 DRAGMODEHIDE system variable

### 7.148.1 Hide original entity when dragging

Specifies whether the original entity should be visible or not when a drag operation is performed.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	1: Hide original entity in 3D Modeling commands. 2: Hide original entity in 2D Drafting commands.

## 7.149 DRAGMODEINTERRUPT system variable

### 7.149.1 Dragging interruption mode

Specifies whether the recalculation/redrawing of the model can be interrupted when mouse cursor is being moved (responsive, but may cause blinking, incomplete or disappearing graphics) or every drag iteration must be completed (slow, but graphics is always valid).

BricsCAD only



Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	1
Possible values:	0: Disabled 1: Enabled

## 7.150 DRAGOPEN system variable

### 7.150.1 Drag open

Specifies if a drawing file that is dragged onto the application inserts into the current drawing or opens as a separate drawing.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Insert file 1: Open file

## 7.151 DRAGP1 system variable

### 7.151.1 Regen-drag rate

Specifies the regen-drag input sampling rate.

Type:	Short
Saved in:	Registry
Range:	0 to 32767
Default value:	10



## 7.152 DRAGP2 system variable

### 7.152.1 Fast-drag rate

Specifies the fast-drag input sampling rate.

Type:	Short
Saved in:	Registry
Range:	0 to 32767
Default value:	25

## 7.153 DRAGSNAP system variable

### 7.153.1 Snap dragged entities

Switches entity snapping of dragged entities on or off.

The DRAGSNAP system variable controls the snap behavior while 'dragging', providing an increased WYSIWIG experience. DRAGSNAP controls whether rubberband dynamics are displayed at the current cursor location or at the current entity snap location. DRAGSNAP applies to all modify commands that display dynamics, such as COPY, PASTECLIP, PASTEBLOCK, MOVE, ROTATE, MIRROR, SCALE and STRETCH.

When DRAGSNAP is off, snap is only in effect during drawing and editing commands; when DRAGSNAP is on, the cursor also snaps when no command is active.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't snap dragged entities On (1): Snap dragged entities

## 7.154 DRAWINGPATH system variable

### 7.154.1 Drawings path

Specifies an additional folder in the file dialog for the OPEN and SAVEAS commands. On the Windows platform: the fifth folder in the open file dialog's Places Bar.

BricsCAD only



Type:	String Standard
Saved in:	Preference

## 7.155 DRAWINGVIEWPRESET system variable

### 7.155.1 Drawing view preset

Stores the current preset for the VIEWBASE command, the default value is 'None'. Presets specify the types of generated drawings and their placement in the layout.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	None

## 7.156 DRAWINGVIEWPRESETHIDDEN system variable

### 7.156.1 Drawing view hidden lines preset

Stores the current hidden lines preset for the VIEWBASE command.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't store the current hidden line preset On (1): Store the current hidden line preset

## 7.157 DRAWINGVIEWPRESETSCALE system variable

### 7.157.1 Scale for drawing view preset

Stores the annotation scale for current drawing view preset.

BricsCAD only

Type:	String
-------	--------



Saved in:	Registry
-----------	----------

## 7.158 DRAWINGVIEWPRESETTANGENT system variable

### 7.158.1 Drawing view tangent lines preset

Stores the current tangent lines preset for VIEWBASE command.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't store the current tangent lines preset On (1): Store the current tangent lines preset

## 7.159 DRAWINGVIEWPRESETTRAILING system variable

### 7.159.1 Drawing view trailing lines preset

Stores the current trailing lines preset for VIEWBASE command.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't store the current trailing lines preset On (1): Store the current trailing lines preset

## 7.160 DRAWINGVIEWQUALITY system variable

### 7.160.1 Quality of drawing views

Specifies the quality of drawing views.

You can significantly reduce the time needed to generate drawing views by changing the DRAWINGVIEWQUALITY setting to 0. This enables draft-quality drawing views. Such drawing views are internally represented as 3D solids, which makes it impossible to put annotations on their silhouette



edges. However, they look very similar to a precise (high-quality) drawing view and you can use them to quickly create layouts.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: Draft quality 1: High quality

## 7.161 DRAWORDERCTL system variable

### 7.161.1 Draworder control

Specifies the default behavior for the display of overlapping entities. Use this setting to limit draw order if some editing operations take slightly longer. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	3
Possible options:	1: Default display of entities with draw order 2: Draw order inheritance

## 7.162 DWFFORMAT system variable

### 7.162.1 Default DWF format

Specifies the default format to DWF or DWFX for 3DDWF command.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	0 to 1
Default value:	1
Possible values:	0: DWF 1: DWFX

## 7.163 DWFFRAME system variable

### 7.163.1 DWF frame

Specifies the visibility of DWF or DWFX underlay frames.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Hide DWF frames 1: Display and plot DWF frames 2: Display but do not plot DWF frames

## 7.164 DWFOSNAP system variable

### 7.164.1 Dwf entity snap

Enable snapping to entities in DWF underlay files.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Disable DWF entity snap On (1): Enable DWF entity snap



## 7.165 DWFVERSION system variable

### 7.165.1 DWF version

Specifies the dwf version for export in dwf format.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 10
Default value:	2
Possible values:	<ul style="list-style-type: none"><li>1: 3D DWF v6.01</li><li>2: Binary DWF v6.0</li><li>3: Zipped Ascii Encoded 2D Stream DWF v6.0</li><li>4: Compressed DWF v5.5</li><li>5: Binary DWF v5.5</li><li>6: Ascii DWF v5.5</li><li>7: Compressed DWF v4.2</li><li>8: Binary DWF v4.2</li><li>9: Ascii DWF v4.2</li><li>10: XPS DWFx</li></ul>

## 7.166 DWGCHECK system variable

### 7.166.1 Drawing check

Executes an automatic data integrity check when opening a drawing.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	<ul style="list-style-type: none"><li>0: Warn on potential problem</li><li>1: Warn on potential problem and on other application</li><li>2: Notify on potential problem</li><li>3: Notify on potential problem, warn on other application</li></ul>



## 7.167 DWGCODEPAGE system variable

### 7.167.1 Drawing codepage

Displays the drawing code-page for text in drawings (same value as SYSCODEPAGE).

Read-only

Type:	String
Saved in:	Drawing

## 7.168 DWGNAME system variable

### 7.168.1 Drawing name

Shows the name of the current drawing.

Read-only

Type:	String
Saved in:	Not saved

## 7.169 DWGPREFIX system variable

### 7.169.1 Drawing prefix

Shows the folder path of the current drawing.

Read-only

Type:	String Standard
Saved in:	Not saved

## 7.170 DWGTITLED system variable

### 7.170.1 Drawing titled

Specifies if the current drawing has been named.

Read-only

Type:	Boolean
Saved in:	Not saved



Default value:	On
Possible values:	Off (0): Drawing has not been named On (1): Drawing has been named

## 7.171 DXEVAL system variable

### 7.171.1 Data extraction update mode

Specifies the notification for data extraction tables. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 511
Default value:	12
Possible options:	0: No notification 1: Notification on open 2: Notification on save 4: Notification on plot 8: Notification on publish 16: Notification on ETRANSMIT or ARCHIVE 32: Notification on save + automatic update 64: Notification on plot + automatic update 128: Notification on publish + automatic update 256: Notification on ETRANSMIT or ARCHIVE + automatic update

## 7.172 DXFTEXTADJUSTALIGNMENT system variable

### 7.172.1 Dxf text adjust alignment

Specifies whether alignment is adjusted when text is loaded from DXF file.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't adjust alignment On (1): Adjust alignment
------------------	---

## 7.173 DYNCONSTRAINTMODE system variable

### 7.173.1 Dynamic Constraint Mode

Specifies the visibility of hidden dimensional constraints when the constrained entity is selected.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display hidden dimensional constraints when the constrained entities are selected. On (1): Display hidden dimensional constraints when the constrained entities are selected.

## 7.174 DYNDIGRIP system variable

### 7.174.1 Show dynamic dimensions

Specifies which dynamic dimensions are shown. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 31
Default value:	31
Possible options:	0: None 1: Resulting length 2: Extended length 4: Absolute angle 8: Relative angle 16: Arc radius



## 7.175 DYNDIMAPERTURE system variable

### 7.175.1 Dynamic dimension aperture

Specifies the radius (in pixels) around cursor. This parameter is used only when DYNMODE flag is 16 'Nearest entity dynamic dimensions'. The nearest entity is looked for between entities which intersect or are inside this radius.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 500
Default value:	20
Unit	pixels

## 7.176 DYNDIMCOLORHOT system variable

### 7.176.1 Dynamic dimension hot color

Specifies the color of dynamic dimensions when moving grip points.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 255
Default value:	142

## 7.177 DYNDIMCOLORHOVER system variable

### 7.177.1 Dynamic dimension hover color

Specifies the color of dynamic dimensions when hovering over a grip point.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Preference
Range:	1 to 255
Default value:	142


## 7.178 DYNDIMDISTANCE system variable

### 7.178.1 Dynamic dimension distance

Specifies a factor for the distance between the dynamic dimension line and the grip points being dimensioned (default: 0.0).

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.0 to 10.0
Default value:	1.0

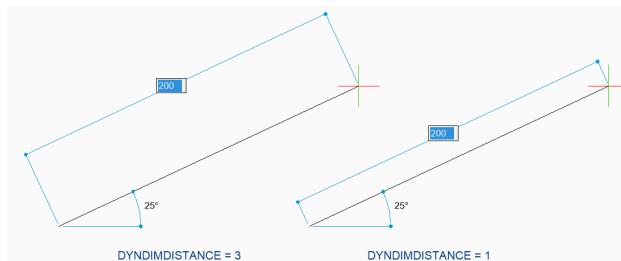

## 7.179 DYNDIMLINETYPE system variable

### 7.179.1 Dynamic dimension linetype

Specifies the linetype of dynamic dimensions when moving grip points.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	-1 to 2



Default value:	0
Possible values:	-1: Current 0: Continuous 1: Dotted 2: Dashed

## 7.180 DYNDIVIS system variable

### 7.180.1 Dynamic dimension visibility

Specifies how many dynamic dimensions are displayed while moving grips.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1
Possible values:	0: Only the first dynamic dimension 1: Only the first two dynamic dimensions 2: All dynamic dimensions, as specified by DYNDIGRIP

## 7.181 DYNINPUTTRANSPARENCY system variable

### 7.181.1 Transparency of dynamic input fields

Specifies the transparency of dynamic input fields. A value of 0 sets the fields to be fully transparent, and a value of 100 sets the fields to be fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	90



## 7.182 DYNMODE system variable

### 7.182.1 Dynamic input mode

Turns dynamic input features on and off. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	-31 to 31
Default value:	3
Possible options:	Negative: Switch all off temporarily 0: No dynamic input 1: Dynamic input at pointer (not supported) 2: Editable dynamic dimensions 4: Tracking dynamic dimensions 8: Nearest entity by UCS X/Y axes dynamic dimensions 16: Nearest entity dynamic dimensions

## 7.183 DYNPICOORDS system variable

### 7.183.1 Default mode for dynamic coordinates input

Specifies the default mode in which coordinates are entered during dynamic input.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Relative 1: Absolute



## 8. E

### 8.1 EDGEMODE system variable

#### 8.1.1 Edge mode

Specifies how cutting and boundary edges are checked with the TRIM and EXTEND commands, with or without extension.


Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Use the selected edge without an extension On (1): Extend or trim the selected entity to an imaginary extension of the cutting or boundary edge

### 8.2 ELEVATION system variable

#### 8.2.1 Elevation

Specifies the current elevation for new entities relative to the current UCS.

Type:	Real
Saved in:	Drawing
Default value:	0.0

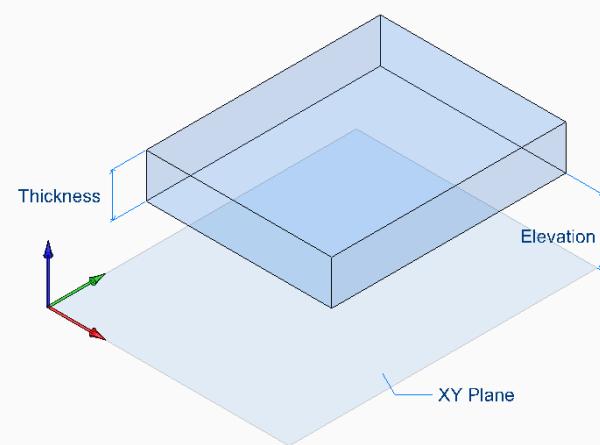



## 8.3 ENABLEATTRACTION system variable

### 8.3.1 Grips attraction

Toggles the magnetism of entity grips.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable grips attraction On (1): Enable grips attraction

## 8.4 ENABLEHYPERLINKMENU system variable

### 8.4.1 Hyperlink menu

Toggles the hyperlink menu On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable hyperlink menu On (1): Enable hyperlink menu

## 8.5 ENABLEHYPERLINKTOOLTIP system variable

### 8.5.1 Hyperlink tooltip

Toggles the display of the hyperlink tooltip On/Off.

BricsCAD only

Type:	Preference
Saved in:	Off



Possible values:	Off (0): Disable hyperlink tooltip On (1): Enable hyperlink tooltip
------------------	--

## 8.6 ERRNO system variable

### 8.6.1 Error number

Reports the error type which occurred in a LISP program.

Read-only

Type:	Short
Saved in:	Not saved
Default value:	0

## 8.7 EXPERT system variable

### 8.7.1 Expert

Specifies the display of certain prompts. If prompts are suppressed by EXPERT, the operation proceeds as though you entered y(es) at the suppressed prompt. EXPERT can affect scripts, menu macros, LISP and command functions.

Type:	Short
Saved in:	Not saved
Range:	0 to 5
Default value:	0
Possible values:	0: Issue all prompts normally 1: Suppress 'regen' and 'layer off' prompts 2: Also suppress 'block already defined' (BLOCK) and 'file already exists' (SAVE and WBLOCK) prompts 3: Also suppress 'linetype already loaded' prompt 4: Also suppress 'file already exists' (UCS and VPORTS Save) prompts 5: Also suppress 'dimstyle already exists' prompt



## 8.8 EXPINSALIGN system variable

### 8.8.1 Explorer Insert Aligned

Align blocks inserted from the Drawing Explorer with selected entities.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't insert blocks aligned On (1): Insert blocks aligned

## 8.9 EXPINSANGLE system variable

### 8.9.1 Explorer Insert Angle

Rotation angle used when inserting blocks from the Drawing Explorer.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0
Unit	degrees

## 8.10 EXPINSFIXANGLE system variable

### 8.10.1 Explorer Insert Fix Angle

Insert blocks from the Drawing Explorer at a fixed rotation angle.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On



Possible values:	Off (0): Don't insert blocks at fixed angle On (1): Insert blocks at fixed angle
------------------	---

## 8.11 EXPINSFIXSCALE system variable

### 8.11.1 Explorer Insert Fix Scale

Insert blocks from the Drawing Explorer at a fixed scale.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't insert blocks at fixed scale On (1): Insert blocks at fixed scale

## 8.12 EXPINSSCALE system variable

### 8.12.1 Explorer Insert Scale

Scale factor used when inserting blocks from the Drawing Explorer.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	1.0

## 8.13 EXPLMODE system variable

### 8.13.1 Explode mode

Specifies whether EXPLODE applies to nonuniformly scaled (NUS) blocks.

Type:	Boolean
Saved in:	Registry
Range:	On



Possible values:	Off (0): Don't explode nonuniformly scaled blocks On (1): Explode nonuniformly scaled blocks
------------------	---

## 8.14 EXPORTACISFORMATVERSION system variable

### 8.14.1 ACIS export format version

Defines the ACIS file version to export.

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	0
Possible options:	0: Latest available 1: R18 2: R19 3: R20 4: R21 5: R22 6: R23 7: R24 8: R25 9: 2016 10: 2017 11: 2018 12: 2019 13: 2020 14: 2021

## 8.15 EXPORTMODELSpace system variable

### 8.15.1 Export model space

Specifies what part of the drawing to export from model space to a DWF, DWFX or PDF file.

Type:	Short
Saved in:	Drawing
Range:	0 to 2



Default value:	0
Possible values:	0: Display 1: Extents 2: Window

## 8.16 EXPORTPAGESETUP system variable

### 8.16.1 Export page setup

Specifies if the current page setup is used when exporting to a DWF, DWFx or PDF file.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	0: Default 1: Override

## 8.17 EXPORTPAPERSPACE system variable

### 8.17.1 Export paper space

Specifies what part of the drawing to export from paper space to a DWF, DWFx or PDF file.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	0: Current layout 1: All layouts



## 8.18 EXTMAX system variable

### 8.18.1 Extents maximum

Shows the coordinates of the upper-right point of the drawing extents. It increases as new entities are created outside the existing extents.

Read-only

Type:	3D point
Saved in:	Drawing

## 8.19 EXTMIN system variable

### 8.19.1 Extents minimum

Shows the coordinates of the lower-left point of the drawing extents.

Read-only

Type:	3D point
Saved in:	Drawing

## 8.20 EXTNAMES system variable

### 8.20.1 Extend names

Specifies the parameters for the names of named entities (e.g. linetypes and layers) saved in symbol tables.

Type:	Boolean
Saved in:	Drawing
Default value:	1
Possible values:	Off (0): Names up to 31 characters On (1): Names up to 255 characters



## 9. F

### 9.1 FACETRATIO system variable

#### 9.1.1 Faceting aspect ratio

Specifies the aspect ratio of faceting for cylindrical and conic ACIS solids.

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0
Possible values:	0: Creates an N by 1 mesh for cylindrical and conic ACIS solids 1: Creates an N by M mesh for cylindrical and conic ACIS solids

### 9.2 FACETRES system variable

#### 9.2.1 Facet resolution

Specifies the smoothness of shaded, rendered and hidden lines views. For large values there can be significant impact on memory usage and performance.

Type:	Real
Saved in:	Drawing
Range:	0.01 to 10.0
Default value:	0.5

### 9.3 FBXEXPORTCAMERAS system variable

#### 9.3.1 Fbx Export Cameras

Specifies whether to export the cameras from model space.

BricsCAD only

Type:	Boolean
Saved in:	Preference



Default value:	On
Possible values:	Off (0): Disable export of cameras On (1): Enable export of cameras

## 9.4 FBXEXPORTENTITIES system variable

### 9.4.1 Fbx Export Entities

Specifies whether to export the entities from model space.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable export of entities On (1): Enable export of entities

## 9.5 FBXEXPORTENTITIESSELTYPE system variable

### 9.5.1 Fbx entities to export

Specifies the type of displayed entities that gets exported.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Visible Entities 1: Selected Entities



## 9.6 FBXEXPORTLIGHTS system variable

### 9.6.1 Fbx Export Lights

Specifies whether to export the lights from model space.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable export of lights On (1): Enable export of lights

## 9.7 FBXEXPORTMATERIALS system variable

### 9.7.1 Fbx Export Materials

Specifies whether to export the materials from model space.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable export of materials On (1): Enable export of materials

## 9.8 FBXEXPORTTEXTURES system variable

### 9.8.1 Fbx Export Textures

Set type for the export of materials.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2



Default value:	0
Possible values:	0: Embed 1: Reference 2: Copy textures to location

## 9.9 FBXEXPORTTEXTURESPATH system variable

### 9.9.1 FBX Export Textures path

Specifies the folder path where textures are copied when exporting a model to FBX file format. This setting is only used when the FBXEXPORTTEXTURES system variable is set to 2.

BricsCAD only

Type:	String Standard
Saved in:	Preference

## 9.10 FEATURECOLORS system variable

### 9.10.1 Feature colors

Specifies if the solid faces are colored by specified color of related feature.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	ON
Possible options:	On (1): Solid faces are colored by specified color of related feature Off (0): All feature faces are colored with the default 3d solid color.

## 9.11 FIELDDISPLAY system variable

### 9.11.1 Field display

Specifies whether a gray fill is used to display a field.

Type:	Boolean
Saved in:	Registry



Default value:	On
Possible values:	Off (0): No gray background On (1): Gray background

## 9.12 FIELDEVAL system variable

### 9.12.1 Field update mode

Specifies the way fields are updated. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 31
Default value:	31
Possible options:	0: Not updated 1: Updated on open 2: Updated on save 4: Updated on plot 8: Updated on use of ETRANSMIT 16: Updated on regeneration

## 9.13 FILEDIA system variable

### 9.13.1 File dialog

Toggles the display of file dialog boxes. If FILEDIA is Off, you can still get a file dialog if you type a tilde (~) at the command prompt. This procedure also counts for LISP functions and command fields in tool definitions.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display file dialog boxes On (1): Display file dialog boxes



## 9.14 FILLETRAD system variable

### 9.14.1 Fillet radius

The last radius used with the FILLET command.

Type:	Real
Saved in:	Drawing
Default value:	0.5

## 9.15 FILLMODE system variable

### 9.15.1 Fill mode

Specifies whether multilines, traces, solids, hatches (including solid-fill), and wide polylines are filled in. If FILLMODE is off, all filled entities display and print as outlines, this will also reduce the time it takes to display or print a drawing.

Type:	Boolean
Saved in:	Drawing
Range:	On
Possible values:	Off (0): Entities are not filled On (1): Entities are filled

## 9.16 FLOORTOFLOORDISTANCE system variable

### 9.16.1 Floor to floor distance

Sets the distance between the top faces of floor slabs of subsequent stories, when using BIMQUICKDRAW.  
BricsCAD only

Type:	Real
Saved in:	Drawing
Default value:	3250 mm / 10'-10"



## 9.17 FONTALT system variable

### 9.17.1 Alternate font

Specifies the font which will be used if a text font cannot be found.

Type:	String
Saved in:	Registry
Default value:	simplex.shx

## 9.18 FONTMAP system variable

### 9.18.1 Font mapping file

Specifies the font mapping file.

Type:	String
Saved in:	Registry
Default value:	default.fmp

## 9.19 FRAME system variable

### 9.19.1 Frame

Specifies the visibility of frames for external references, images and underlays. It overrides the individual IMAGEFRAME, DWFFRAME, PDFFRAME, DGNFRAME, and XCLIPFRAME settings.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	3
Possible values:	0: Hide frames 1: Display and plot frames 2: Display but do not plot frames 3: Use individual settings for different underlays, external references and images



## 9.20 FRAMESELECTION system variable

### 9.20.1 Frame selection

Specifies whether the hidden frame of an image, underlay, clipped xref, or wipeout can be selected.

Type:	Boolean
Saved in:	Registry
Default value:	1
Possible values:	Off (0): Hidden frames cannot be selected On (1): Hidden frames can be selected

## 9.21 FRONTZ system variable

### 9.21.1 Front clipping plane offset

Specifies the current viewport's front clipping plane offset from the target plane, expressed in drawing units. Clipping planes are used in the CLIPPING option of the DVVIEW command.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 9.22 FULLOPEN system variable

### 9.22.1 Full open

Indicates the state of the current drawing: partially opened or fully opened.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Possible values:	0: Drawing is partially open 1: Drawing is fully open



## 10. G

### 10.1 GENERATEASSOCATTRS system variable

#### 10.1.1 Generate associative attributes

Specifies whether associative attributes are generated for 3D entities.

BricsCAD only

Type:	Boolean
Saved in:	Workspace
Possible values:	Off (0): Do not generate associative attributes for 3D entities On (1): Generate associative attributes for 3D entities

### 10.2 GENERATEASSOCVIEWS system variable

#### 10.2.1 Generate associative drawings

Specifies associativity between the 3D model and generated views (VIEWBASE) and calculated drawings (BIMSECTIONUPDATE). As a result dimensions are updated in the associated paperspace viewports and BIM section drawings.

BricsCAD only

Type:	Boolean
Saved in:	Workspace
Default value:	Off
Possible values:	Off (0): Disable associative dimensions On (1): Enable associative dimensions

### 10.3 GEOLATLONGFORMAT system variable

#### 10.3.1 Geographic latitude/longitude format

Specifies the format of geographical latitude and longitude values.

Type:	Short
Saved in:	Drawing



Range:	0 to 1
Default value:	0
Possible values:	0: Decimal degrees 1: Degrees/minutes/seconds

## 10.4 GEOMARKERVISIBILITY system variable

### 10.4.1 Geographic marker visibility

Specifies the visibility of the geographic marker.

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Geographic marker is not visible On (1): Geographic marker is visible

## 10.5 GEOMRELATIONS system variable

### 10.5.1 Geometric relationship indication

Specified geometric relationships are recognized during dragging 2D entity. And dragged entity is adjusted to satisfy recognized relationship. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	0
Possible options:	1: Recognize tangency relation 2: Recognize perpendicularity relation



## 10.6 GETSTARTED system variable

### 10.6.1 Get Started

Specifies whether the Launcher dialog is displayed each time BricsCAD starts up.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't show Launcher dialog On (1): Show Launcher dialog

## 10.7 GFANG system variable

### 10.7.1 Gradient fill angle

Specifies the angle of a gradient fill.

Type:	Real
Saved in:	Not saved
Default value:	0.0

## 10.8 GFCLR1 system variable

### 10.8.1 Gradient fill primary color

The first color of a gradient fill.

Type:	String
Saved in:	Not saved
Default value:	5

## 10.9 GFCLR2 system variable

### 10.9.1 Gradient fill secondary color

The second color of a gradient fill.



Type:	String
Saved in:	Not saved
Default value:	7

## 10.10 GFCLRLUM system variable

### 10.10.1 Gradient fill tint level

Specifies the tint intensity in a one-color gradient fill.

Type:	Real
Saved in:	Not saved
Default value:	1.0

## 10.11 GFCLRSTATE system variable

### 10.11.1 Number of colors for a gradient fill

Specifies number of colors (one or two) for a gradient fill.

Type:	Boolean
Saved in:	Not saved
Default value:	0
Possible values:	Off (0): Two colors On (1): One color

## 10.12 GFNAME system variable

### 10.12.1 Gradient fill name

Specifies the pattern of a gradient fill.

Type:	Short
Saved in:	Not saved



Range:	1 to 9
Default value:	1
Possible values:	1: LINEAR 2: CYLINDER 3: INVCYLINDER 4: SPHERICAL 5: HEMISPHERICAL 6: CURVED 7: INVSPHERICAL 8: INVHEMISPHERICAL 9: INVCURVED

## 10.13 GFSHIFT system variable

### 10.13.1 Gradient fill shift

Specifies whether the pattern in a gradient fill is centered or is shifted up and to the left.

Type:	Boolean
Saved in:	Not saved
Default value:	0
Possible values:	Off (0): Centered On (1): Shifted

## 10.14 GLSWAPMODE system variable

### 10.14.1 GL Swap Mode

Specifies the swap method used when drawing with the GL engine. Depending on the used hardware driver, the visual effect may differ by choosing between these options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 4



Default value:	2
Possible values:	0: Call glCopyPixels to copy back to front, don't call glXSwapBuffers. 1: Call glCopyPixels to copy back to front, then call glXSwapBuffers. 2: Call glXSwapBuffers, don't call glCopyPixels. 3: Call glXSwapBuffers, then call glCopyPixels to copy front to back. 4: Do nothing - for testing purposes only.

## 10.15 GRADIENTCOLORBOTTOM system variable

### 10.15.1 Background gradient color bottom

Specifies the default bottom color for gradient backgrounds and also the default for solid view backgrounds.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	RGB:210,210,210"

## 10.16 GRADIENTCOLORMIDDLE system variable

### 10.16.1 Background gradient color middle

Specifies the default middle color for gradient backgrounds. This only applies if GRADIENTMODE is set to Three-color gradient.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	RGB:250,250,250"

## 10.17 GRADIENTCOLORTOP system variable

### 10.17.1 Background gradient color top

Specifies the default top color for gradient backgrounds.

BricsCAD only



Type:	String
Saved in:	Preference
Default value:	White

## 10.18 GRADIENTMODE system variable

### 10.18.1 Background gradient mode

Specifies if and how a gradient is to be applied in the default background (this is only used as a default value for the Background dialog).

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: No gradient background 1: Two-color gradient (top/bottom) 2: Three-color gradient (top/middle/bottom)

## 10.19 GRIDAXISCOLOR system variable

### 10.19.1 Grid axis color

Specifies the color of the grid axis lines.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	254



## 10.20 GRIDDISPLAY system variable

### 10.20.1 Grid display

Specifies how the grid is displayed. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 15
Default value:	2
Possible options:	0: Restrict to LIMITS area 1: Display beyond LIMITS area 2: Adaptive grid display 4: Allow subdivision below grid spacing 8: Follow Dynamic UCS

## 10.21 GRIDMAJOR system variable

### 10.21.1 Grid major

Specifies the frequency of major versus minor gridlines.

Type:	Short
Saved in:	Drawing
Range:	1 to 100
Default value:	5

## 10.22 GRIDMAJORCOLOR system variable

### 10.22.1 Grid major color

Specifies the color of the major grid lines.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Registry
Range:	1 to 255
Possible values:	251

## 10.23 GRIDMINORCOLOR system variable

### 10.23.1 Grid minor color

Specifies the color of the minor grid lines.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	250

## 10.24 GRIDMODE system variable

### 10.24.1 Grid mode

Turns the grid on or off.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Grid off On (1): Grid on

## 10.25 GRIDSTYLE system variable

### 10.25.1 Grid style

Specifies whether the grid is displayed with dots or lines. The value is stored as a bitcode using the sum of the values of all selected options.



Type:	Short
Saved in:	Registry
Range:	0 to 7
Default value:	0
Possible options:	0: Lined grid 1: Dotted grid in 2D model space 2: Dotted grid in Block Editor 4: Dotted grid in Sheet/Layout

## 10.26 GRIDUNIT system variable

### 10.26.1 Grid unit

Specifies the X and Y grid spacing for the current viewport.

Type:	2D point
Saved in:	Drawing
Default value:	0.5,0.5

## 10.27 GRIDXYZTINT system variable

### 10.27.1 Grid XYZ tint

Specifies whether the XYZ tints are to be applied over the color of the grid lines. (XYZ tints are stored in COLORX, COLORY, COLORZ variables). The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 7
Default value:	1



Possible options:	1: Apply XYZ tint to grid axis lines 2: Apply XYZ tint to major grid lines 4: Apply XYZ tint to minor grid lines
-------------------	--

## 10.28 GRIPBLOCK system variable

### 10.28.1 Grips in blocks

Specifies the display of grips for entities within a selected block. The insertion point of the block is displayed regardless of this setting.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Doesn't display grips of entities within the block On (1): Displays grips of entities within the block

## 10.29 GRIPCOLOR system variable

### 10.29.1 Grip color

Specifies the color of unselected grips (drawn as box outlines). Values between 1 and 255 are accepted.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	72

## 10.30 GRIPDYNCOLOR system variable

### 10.30.1 Dynamic grip color

Specifies the color of custom grips for dynamic blocks. Values between 1 and 255 are accepted. (Not yet supported)

Type:	Short
-------	-------



Saved in:	Registry
Range:	1 to 255
Default value:	140

## 10.31 GRIPHOT system variable

### 10.31.1 Selected grip color

Specifies the color of selected grips (hot grips), which are drawn as filled boxes.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	240

## 10.32 GRIPHOVER system variable

### 10.32.1 Hover grip color

Specifies the fill color of an unselected grip when the cursor pauses over it. Values between 1 and 255 are accepted.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	150

## 10.33 GRIPOBJLIMIT system variable

### 10.33.1 Grip object limit

The display of grips is suppressed, if the number of selected entities exceeds the value of this settings variable. If set to 0, grips are always displayed. Values between 0 and 32767 are accepted.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 32767
Default value:	100

## 10.34 GRIPS system variable

### 10.34.1 Grips

Specifies the display of grips on selected entities.

Type:	Short
Saved in:	Registry
Default value:	2
Possible values:	0: Turn off grips 1: Turn on endpoint grips 2: Turn on endpoint and midpoint grips

## 10.35 GRIPSIZE system variable

### 10.35.1 Grip size

Specifies the size of the grip box (in pixels). Values between 1 and 255 are accepted.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	4

## 10.36 GRIPTIPS system variable

### 10.36.1 Grip tips

Specifies whether grip tips display when the cursor hovers over grips on custom entities or dynamic blocks that support grip tips. (Not yet supported)



Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display grip tips On (1): Display grip tips

## 10.37 GSDEVICETYPE2D system variable

### 10.37.1 2D graphic system device

Specifies the current graphic system device for wireframe output. The GDI+ option is strongly recommended. Additional options are available only for testing purposes.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: GDI+ 1: OpenGL (not recommended, available only for testing) 2: RedOpenGL (not recommended, available only for testing) 3: GDI (not recommended, available only for testing)

## 10.38 GSDEVICETYPE3D system variable

### 10.38.1 3D graphic system device

Set current graphic system device for rendered output for Hidden, Gouraud (with edges) and Flat (with edges) visual styles. Other rendered visual styles (such as modeling, realistic) will always use RedOpenGL device.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	0 to 1
Default value:	1
Possible values:	0: OpenGL 1: RedOpenGL



## 11. H

### 11.1 HALOGAP system variable

#### 11.1.1 Halo gap

Specifies whether a gap is to be displayed if an entity is hidden by another entity. To be specified as a percent of one drawing unit, independent of the zoom level. HALOGAP applies to 2D views only.

Type:	Short
Saved in:	Drawing
Range:	0 to 100
Default value:	0

### 11.2 HANDLES system variable

#### 11.2.1 Publish Handles

Shows whether object handles can be accessed by applications or not.

Read-only

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Handles cannot be accessed by applications On (1): Handles can be accessed by applications

### 11.3 HANDSEED system variable

#### 11.3.1 Handle seed

Starting handle for creating new entities.

BricsCAD only

Read-only

Type:	String
-------	--------



Saved in:	Not saved
Default value:	25

## 11.4 HIDEPRECISION system variable

### 11.4.1 Hide and shade precision

Specifies the accuracy of hides and shades. If set to 1 (double precision) more memory is needed, which might affect performance.

Type:	Short
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Double precision off On (1): Double precision on

## 11.5 HIDESYSTEMPRINTERS system variable

### 11.5.1 Hide system printers

Specifies whether system printers are shown.

Type:	Boolean
Saved in:	Preference
Default value:	Off

## 11.6 HIDETEXT system variable

### 11.6.1 Hide text on HIDE

Specifies whether the HIDE command processes text entities.

Type:	Short
Saved in:	Drawing
Range:	0 to 1



Default value:	1
Possible values:	0: Text is not hidden and does not hide other entities 1: Text is hidden but does hide other entities

## 11.7 HIDEXREFSCALES system variable

### 11.7.1 Hide xref scales

Hides scales that come from external references.

Type:	Boolean
Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Don't hide xref scales On (1): Hide xref scales

## 11.8 HIGHLIGHT system variable

### 11.8.1 Highlight

Specifies if entities highlight on screen when selected.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Entity selection highlighting off On (1): Entity selection highlighting on

## 11.9 HIGHLIGHTCOLOR system variable

### 11.9.1 Selection Highlight Color

Specifies which highlight color to be used when GLSelectionHighlightStyle is set to "Use a different color for highlight".

BricsCAD only



Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	142

## 11.10 HIGHLIGHTEFFECT system variable

### 11.10.1 Selection Highlight Style

Specifies which highlight method to be used.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	0: Use line stipple for highlight (default). 1: Use a different color for highlight. 2: Use a thickened line for highlight. 3: Use a different color and thickened line for highlight.

## 11.11 HORIZONBKG\_ENABLE system variable

### 11.11.1 Horizon background

Specifies whether horizon background should be enabled for perspective views.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable horizon background On (1): Enable horizon background



## 11.12 HORIZONBKG\_GROUNDHORIZON system variable

### 11.12.1 Ground horizon

Specifies the color of the ground horizon.

Type:	String
Saved in:	Preference
Default value:	RGB:67,74,80"

## 11.13 HORIZONBKG\_GROUNDORIGIN system variable

### 11.13.1 Ground origin

Specifies the color of the ground origin.

Type:	String
Saved in:	Preference
Default value:	RGB:95,103,112"

## 11.14 HORIZONBKG\_SKYHIGH system variable

### 11.14.1 Sky high

Specifies the color of the higher regions of the sky.

Type:	String
Saved in:	Preference
Default value:	RGB:204,229,234"

## 11.15 HORIZONBKG\_SKYHORIZON system variable

### 11.15.1 Sky horizon

Specifies the color at the lowest part of the sky at the horizon. This effect can be very subtle. This color is also used as the color of the "sky" when the camera would look below the earth.

Type:	String
-------	--------



Saved in:	Preference
Default value:	RGB:238,248,250"

## 11.16 HORIZONBKG\_SKYLOW system variable

### 11.16.1 Sky low

Specifies the color of the lower regions of the sky.

Type:	String
Saved in:	Preference
Default value:	RGB:238,248,250"

## 11.17 HOTKEYASSISTANT system variable

### 11.17.1 Hotkey Assistant

Specifies whether to display the Hotkey Assistant widget or not.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't show Hotkey Assistant widget On (1): Show Hotkey Assistant widget

## 11.18 HPANG system variable

### 11.18.1 Hatch pattern angle

Stores the hatch pattern angle.

Type:	Real
Saved in:	Not saved
Default value:	0.0



## 11.19 HPANNOTATIVE system variable

### 11.19.1 Hatch pattern annotative

Specifies whether a new hatch pattern is annotative.

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Hatch pattern is not annotative On (1): Hatch pattern is annotative

## 11.20 HPASSOC system variable

### 11.20.1 Hatch pattern associativity

Specifies whether new hatch patterns and gradient fills are associative or not. Associative hatches and gradient fills are updated automatically when their boundaries change.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't associate hatch patterns and gradient fills with their boundaries On (1): Associate hatch patterns and gradient fills with their boundaries

## 11.21 HPBACKGROUNDCOLOR system variable

### 11.21.1 Hatch background default color

The background color of a hatch. Enter '.' for none.

Type:	String
Saved in:	Drawing
Default value:	.



## 11.22 HPBOUND system variable

### 11.22.1 Hatch pattern boundary

Specifies the entity type (region or polyline) created by BHATCH and BOUNDARY.

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	1
Possible values:	0: Region 1: Polyline

## 11.23 HPBOUNDRETAIN system variable

### 11.23.1 Hatch pattern boundary retain

Specifies whether HATCH/BHATCH commands will create boundary entities.

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0
Possible values:	0: do not create boundary entities 1: create boundary entities

## 11.24 HPCOLOR system variable

### 11.24.1 Hatch default color

The foreground color of a hatch. Enter '' to use the current color, as defined in CECOLOR.

Type:	String
Saved in:	Drawing



Default value:	.
----------------	---

## 11.25 HPDOUBLE system variable

### 11.25.1 Hatch pattern doubling

Specifies whether user-defined patterns create a single hatch or a cross hatch.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Hatch pattern doubling off On (1): Hatch pattern doubling on

## 11.26 HPDRAWORDER system variable

### 11.26.1 Hatch pattern draw order

Specifies the draw order of hatches and gradient fills. The Draw Order setting from the Hatch and Gradient dialog is saved here.

Type:	Short
Saved in:	Not saved
Range:	0 to 4
Default value:	3
Possible values:	0: None 1: Send to back 2: Bring to front 3: Send behind boundary 4: Bring in front of boundary

## 11.27 HPGAPTOL system variable

### 11.27.1 Hatch pattern gap tolerance

Specifies a tolerance to be used when entities are not completely closed when generating a boundary for BHATCH or BOUNDARY. The Tolerance setting from the Hatch and Gradient dialog is saved here. The



default value is 0: the tolerance is set by the application, based on the current view size. When zoomed in closely, boundary detection will fail; when zooming out further so the contour 'looks' closed, the boundary will become detected. Values greater than 0 define the maximum gap in drawing units.

Type:	Real
Saved in:	Registry
Range:	0 or greater
Default value:	0.0

## 11.28 HPISLANDDETECTION system variable

### 11.28.1 Hatch pattern island detection

Specifies islands processing within the hatch boundary.

Type:	Short
Saved in:	Not saved
Range:	0 to 2
Default value:	0
Possible values:	0: Nested. Hatches areas within islands. 1: Outer. Hatches areas outside of islands. 2: Ignore. Hatches whole the boundary.

## 11.29 HPLAYER system variable

### 11.29.1 Default layer for new hatches

Stores the default layer for new hatches.

Type:	String
Saved in:	Drawing
Default value:	0



## 11.30 HPLINETYPE system variable

### 11.30.1 Hatch pattern linetype

Specifies the display of non-continuous linetypes for hatch patterns.

When turned off, lines in the hatch pattern display as continuous, even if a non-continuous linetype is applied to the hatch entity. When turned on, lines in the hatch pattern display with the linetype that's applied to the hatch entity. This is not recommended because it can impact performance. Instead, you can choose a hatch pattern that is predefined with a non-continuous linetype.

Type:	Boolean
Saved in:	Registry
Range:	Off
Possible values:	Off (0): Don't apply non-continuous linetypes to hatch entities On (1): Apply non-continuous linetypes to hatch entities

## 11.31 HPMAXAREAS system variable

### 11.31.1 Fill mode for sparse hatches

Specifies how sparse hatches are filled.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Sparse hatches are left blank 1: Sparse hatches are changed to solid fills

## 11.32 HPNAME system variable

### 11.32.1 Hatch pattern name

Stores the default hatch pattern name.

Type:	String
-------	--------



Saved in:	Not saved
-----------	-----------

## 11.33 HPOBJWARNING system variable

### 11.33.1 Hatch pattern object warning

Specifies how many hatch boundary entities can be selected before a warning message appears.

Type:	Long
Saved in:	Registry
Range:	1 to 100000000
Default value:	10000

## 11.34 HPORIGIN system variable

### 11.34.1 Hatch pattern origin

Stores the origin point for new hatches, relative to the current UCS.

Type:	2D point
Saved in:	Drawing
Default value:	0,0

## 11.35 HPSCALE system variable

### 11.35.1 Hatch pattern scale

Stores the hatch pattern scale factor.

Type:	Real
Saved in:	Not saved
Default value:	1.0



## 11.36 HPSEPARATE system variable

### 11.36.1 Hatch pattern separate

Specifies whether the HATCH command creates a single hatch pattern object or separate entities when several hatch boundaries are selected.

Type:	Boolean
Saved in:	Registry
Range:	Off
Possible values:	Off (0): Don't create separate hatches On (1): Create separate hatches

## 11.37 HPSPACE system variable

### 11.37.1 Hatch pattern spacing

Specifies the hatch pattern line spacing for user-defined hatch patterns.

Type:	Real
Saved in:	Not saved
Default value:	1.0

## 11.38 HPTRANSPARENCY system variable

### 11.38.1 Default transparency for new hatches

Specifies the default transparency level for new hatches.

Type:	String
Saved in:	Drawing
Default value:	.



Possible values:	.: Use current ByLayer: Apply the layer's transparency ByBlock: Apply the block's transparency 0: Apply no transparency (fully opaque) 0-90: Apply transparency percentage from least (1) to most (90) transparent
------------------	--

### 11.39 HYPERLINKBASE system variable

#### 11.39.1 Hyperlink base

Specifies the path for relative hyperlinks in the drawing.

Type:	String Standard
Saved in:	Drawing



## 12. I

### 12.1 IMAGECACHEFOLDER system variable

#### 12.1.1 Image disk cache folder

Specifies the folder where temporary image cache files are stored.

BricsCAD only

Type:	String Standard
Saved in:	Preference
Default value:	{User}AppData/Local/Temp/ImageCache

### 12.2 IMAGECACHEMAXMEMORY system variable

#### 12.2.1 Maximum used memory

Maximum size of in-memory image cache, in MiB (mebibyte).

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	160

### 12.3 IMAGEDISKCACHE system variable

#### 12.3.1 Image disk cache

Enable image disk cache.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable image disk cache On (1): Enable image disk cache



## 12.4 IMAGEFRAME system variable

### 12.4.1 Image frame

Specifies the visibility of image frames.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	1
Possible values:	0: Hide image frames 1: Display and plot image frames 2: Display but do not plot image frames

## 12.5 IMAGEHLT system variable

### 12.5.1 Image highlight

Specifies whether the entire raster image highlights or only the raster image frame when selected.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't highlight entire raster image On (1): Highlight entire raster image

## 12.6 IMAGENOTIFY system variable

### 12.6.1 Image notify

Enables/disables the notification about missing raster images when opening the parent drawing.

BricsCAD only

Type:	Boolean
Saved in:	Registry



Default value:	Off
Possible values:	Off (0): Disable image notification On (1): Enable image notification

## 12.7 IMPORTCUIFILEEXISTS system variable

### 12.7.1 Import cui file exists

Specifies what to do when a CUI file exists already while importing a MNU or CUIX file.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	0 to 2
Possible values:	0: Prompt 1: Overwrite 2: Rename

## 12.8 IMPORTPRODUCTSTRUCTURE system variable

### 12.8.1 Product structure

Defines the way Product structure is represented in the imported model. The option [2] performs automatic BMMECH operation after import and is valid for Pro or higher license level. Otherwise, it works as [1]

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: None 1: As blocks 2: As mechanical components (Pro license is required)



## 12.9 IMPORTREPAIR system variable

### 12.9.1 Repair model on import

The DMAUDITALL command is executed when importing a model. 3D geometry is analyzed and problems are fixed automatically.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): The DMAUDITALL command is not executed when importing a model On (1): The DMAUDITALL command is executed when importing a model

## 12.10 INCLUDEPLOTSTAMP system variable

### 12.10.1 Include Plot Stamp

Specifies whether to include the plot stamp when printing.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't include Plot Stamp On (1): Include Plot Stamp

## 12.11 INDEXCTL system variable

### 12.11.1 Index control

Specifies whether layer and/or spatial indexes are created and saved. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing



Range:	0 to 3
Default value:	0
Possible options:	0: No indexes 1: Layer index 2: Spatial index

## 12.12 INETLOCATION system variable

### 12.12.1 Internet location

Default website for the BROWSER command.

Type:	String
Saved in:	Registry
Default value:	"http://www.bricsys.com"

## 12.13 INSBASE system variable

### 12.13.1 Insertion base point

Stores the drawing's insertion point when inserted into other drawings. INSBASE is set by the BASE command and expressed as a UCS coordinate for the current space.

Type:	3D point
Saved in:	Drawing
Default value:	0,0,0

## 12.14 INSNAME system variable

### 12.14.1 Insertion name

Stores the default block name for the INSERT command.

Type:	String
Saved in:	Drawing



Default value:	
----------------	--

## 12.15 INSUNITS system variable

### 12.15.1 Insertion units

Specifies a drawing-units value for automatic scaling when inserting or attaching blocks, images, or xrefs. When both INSUNITS and PROPUNITS are on, length, area, volume and/or inertia properties will be formatted with their unit.

Type:	Short
Saved in:	Drawing
Range:	0 to 24
Default value:	1
Possible values:	<p>0: Unspecified (No units) 1: Inches 2: Feet 3: Miles 4: Millimeters 5: Centimeters 6: Meters 7: Kilometers 8: Microinches 9: Mils 10: Yards 11: Ångströms 12: Nanometers 13: Microns 14: Decimeters 15: Decameters 16: Hectometers 17: Gigameters 18: Astronomical Units 19: Light-years 20: Parsecs 21: US Survey Feet 22: US Survey Inch 23: US Survey Yard 24: US Survey Mile</p>



## 12.16 INSUNITSDEFSOURCE system variable

### 12.16.1 Insertion units default source

Specifies the source content units value. If INSUNITS in the source drawing is Unspecified, INSUNITSDEFSOURCE is used instead.

Type:	Short
Saved in:	Registry
Range:	0 to 24
Default value:	0
Possible values:	0: Unspecified (No units) 1: Inches 2: Feet 3: Miles 4: Millimeters 5: Centimeters 6: Meters 7: Kilometers 8: Microinches 9: Mils 10: Yards 11: Ångströms 12: Nanometers 13: Microns 14: Decimeters 15: Decameters 16: Hectometers 17: Gigameters 18: Astronomical Units 19: Light-years 20: Parsecs 21: US Survey Feet 22: US Survey Inch 23: US Survey Yard 24: US Survey Mile

## 12.17 INSUNITSDEFTARGET system variable

### 12.17.1 Insertion units default target

Specifies the target drawing units value if INSUNITS is zero. Values between 0 and 24 are accepted.



Type:	Short
Saved in:	Registry
Range:	0 to 24
Default value:	0
Possible values:	0: Unspecified (No units) 1: Inches 2: Feet 3: Miles 4: Millimeters 5: Centimeters 6: Meters 7: Kilometers 8: Microinches 9: Mils 10: Yards 11: Ångströms 12: Nanometers 13: Microns 14: Decimeters 15: Decameters 16: Hectometers 17: Gigameters 18: Astronomical Units 19: Light-years 20: Parsecs 21: US Survey Feet 22: US Survey Inch 23: US Survey Yard 24: US Survey Mile

## 12.18 INSUNITSSCALING system variable

### 12.18.1 Insertion units scaling

Specifies how INSUNITS scaling is applied when inserting, importing and pasting data.

BricsCAD only

Type:	Short
Saved in:	Registry



Range:	0 to 3
Default value:	1
Possible values:	1: Enable INSUNITS scaling. When inserting or attaching Xrefs, Blocks or images the inserted content is scaled with respect to the value of INSUNITS in the target and source drawing. If INSUNITS in the source drawing is Unspecified, INSUNITSDEFSOURCE is used instead. If INSUNITS in the target drawing is Unspecified, INSUNITSDEFTARGET is used instead. 2: Use paper size unit instead of INSUNITS for insertions in paper space.

## 12.19 INTERFERECOLOR system variable

### 12.19.1 Interference color

Specifies the color of interference entities.

Type:	String
Saved in:	Drawing
Default value:	ByLayer

## 12.20 INTERFERELAYER system variable

### 12.20.1 Interference layer

Specifies the layer of interference entities.

BricsCAD only

Type:	String
Saved in:	Registry
Range:	
Default value:	"Interferences"

## 12.21 INTERFEROBJVS system variable

### 12.21.1 Interference object visual style

Specifies the interference object visual style.



Type:	String
Saved in:	Drawing
Default value:	

## 12.22 INTERFERENCEPVS system variable

### 12.22.1 Interference viewport visual style

Specifies the interference checking visual style for the viewport.

Type:	String
Saved in:	Drawing
Default value:	

## 12.23 INTERSECTIONCOLOR system variable

### 12.23.1 Intersection color

Specifies the polyline color at the intersection of 3D surfaces in 2D Wireframe views if INTERSECTIONDISPLAY is on. (Not supported yet)

Type:	Short
Saved in:	Drawing
Range:	0 to 257
Default value:	257
Possible values:	0: ByBlock 1 - 255: index 256: ByLayer 257: ByEntity

## 12.24 INTERSECTIONDISPLAY system variable

### 12.24.1 Intersection display

Toggles the display of polylines at the intersection of 3D surfaces in 2D Wireframe views. (Not supported yet)



Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display intersection polylines On (1): Display intersection polylines

## 12.25 ISAVEBAK system variable

### 12.25.1 Incremental save backup

Specifies the creation of a backup file (BAK). Improves the speed of incremental saves if switched off, especially for large drawings.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't create BAK file On (1): Create BAK file

## 12.26 ISAVEPERCENT system variable

### 12.26.1 Save percent

Specifies the amount of wasted space tolerated in a drawing file expressed as a percentage of the total file size. If the estimate of wasted space exceeds the value set by ISAVEPERCENT, the next save will be a full save, which resets the wasted space estimate to 0. If set to zero, each save is a full save. Values between 0 and 100 are accepted.

Type:	Short
Saved in:	Registry
Range:	0 to 100
Default value:	50




## 12.27 ISOLINES system variable

### 12.27.1 Isolines

Specifies the number of isolines (contour lines) on curved surfaces. To view changes on existing entities, perform a REGEN.

Type:	Short
Saved in:	Drawing
Range:	0 to 2047
Default value:	4

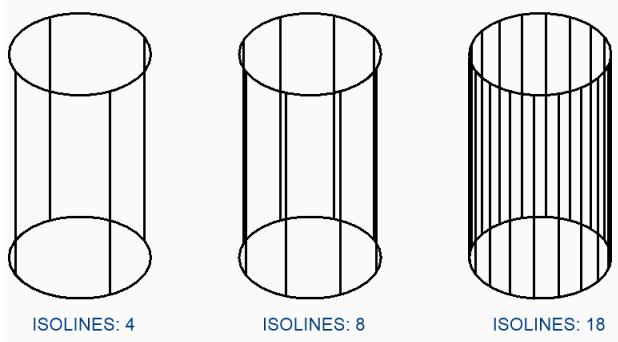



## 13. L

### 13.1 LASTANGLE system variable

#### 13.1.1 Last angle

Specifies the end angle of the last arc drawn.

Read-only

Type:	Real
Saved in:	Not saved

### 13.2 LASTPOINT system variable

#### 13.2.1 Last point

Specifies the coordinates of the last point entered. This is the value which is used when entering the '@' symbol at the Command line. Expressed as a UCS coordinate for the current space.

Type:	3D point
Saved in:	Not saved

### 13.3 LASTPROMPT system variable

#### 13.3.1 Last prompt

Shows the last string echoed to the Command line.

Read-only

Type:	String
Saved in:	Not saved

### 13.4 LATITUDE system variable

#### 13.4.1 Latitude

Specifies the latitude of the drawing in decimal format. Positive values represent northern latitudes and negative values represent southern latitudes.

Type:	Real
-------	------



Saved in:	Drawing
Range:	-90.0 to 90.0
Default value:	37.795

## 13.5 LAYERFILTEREXCESS system variable

### 13.5.1 Layer Filter Excess

Specifies the maximum number of layer filters allowed in a drawing before suggesting some be removed. You can create any number of layer filters. However, if the number of layer filters exceeds this value and exceeds the number of layers, a message dialog displays the next time you open the drawing. It recommends deleting all layer filters to improve performance. When set to 0, the message is never displayed.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	250

## 13.6 LAYERPMODE system variable

### 13.6.1 Layer previous mode

Specifies tracking of changes made to layer settings.

Type:	Boolean
Saved in:	Registry
Range:	On
Possible values:	Off (0): Doesn't allow tracking of layer settings modification and enables LAYERP command On (1): Allows tracking of layer settings modification and enables LAYERP command



## 13.7 LAYLOCKFADECTL system variable

### 13.7.1 Locked layer fade control

Specifies the fading level for entities on locked layers to contrast them with entities on unlocked layers and reduces the visual complexity of a drawing. Entities on locked layers are still visible for reference and for object snapping. Non-positive values disable fading.

Type:	Short
Saved in:	Registry
Range:	-90 to 90
Default value:	50

## 13.8 LAYOUTREGENCTL system variable

### 13.8.1 Layout regeneration control

Specifies how the display of the Model tab and layout tabs is updated. If performance is poor in general or when switching between tabs, setting LAYOUTREGENCTL to 1 or 0 might improve performance.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Always regenerate 1: Suppress regeneration for Model tab and last layout made current 2: Regenerate first time only

## 13.9 LAYOUTTAB system variable

### 13.9.1 Layout and model tabs

Specifies the display of Layout and Model tabs.

Type:	Boolean
Saved in:	Registry



Default value:	On
Possible values:	Off (0): Don't show layout and model tabs On (1): Show layout and model tabs

## 13.10 LEGACYCODESEARCH system variable

### 13.10.1 Legacy code search mode

Specifies how BricsCAD searches for executable code in drawing folders.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Disable unsafe searching for executable code On (1): Enable unsafe searching for executable code

## 13.11 LENGTHUNITS system variable

### 13.11.1 Length units

Specifies a list of units used for displaying lengths when the length bit of PROPUNITS is on. If empty, all lengths are displayed in the current drawing unit.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	"in ft mi µm mm cm m km"

## 13.12 LENSLLENGTH system variable

### 13.12.1 Lens length

Specifies the current viewport's lens length (in millimeters) used in perspective viewing.

Read-only



Type:	Real
Saved in:	Drawing
Range:	
Default value:	50.0
Unit	mm

## 13.13 LEVELODETAIL system variable

### 13.13.1 Length units

Controls the level of detail.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	0
Possible values:	0: Low 2: High

## 13.14 LICFLAGS system variable

### 13.14.1 Licensed components

Specifies whether certain components are licensed or not. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 7
Default value:	0



Possible options:	0: No components licensed 1: VBA is licensed 2: Acis editing is licensed 4: Pro
-------------------	--

## 13.15 LIGHTGLYPHCOLOR system variable

### 13.15.1 Color for light glyph

Specifies the color for light glyphs. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 255
Default value:	30

## 13.16 LIGHTGLYPHDISPLAY system variable

### 13.16.1 Light glyph display

Specifies the display of light glyphs. A light glyph is a graphic symbol that represents point, spot, and web lights.

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Don't display light glyphs On (1): Display light glyphs

## 13.17 LIGHTINGUNITS system variable

### 13.17.1 Lighting units

Specifies if generic or photometric lighting is used, and sets the lighting units type.

Type:	Short
-------	-------



Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Generic lighting - this obsolete option can no longer be set but may exist in older drawings 1: Photometric lighting using American units (foot-candles) 2: Photometric lighting using International units (lux)

## 13.18 LIGHTWEBGLYPHCOLOR system variable

### 13.18.1 Color for web light glyph

Specifies the color for web light glyph. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 255
Default value:	1

## 13.19 LIMCHECK system variable

### 13.19.1 Limits check

Specifies whether entities can be created outside the drawing limits or not.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Can create entities outside limits On (1): Cannot create entities outside limits



## 13.20 LIMMAX system variable

### 13.20.1 Limits maximum

Specifies the upper-right corner of the drawing limits, expressed in world coordinates.

Type:	2D point
Saved in:	Drawing
Default value:	12,9

## 13.21 LIMMIN system variable

### 13.21.1 Limits minimum

Specifies the lower-left corner of the drawing limits, expressed in world coordinates.

Type:	2D point
Saved in:	Drawing
Default value:	0,0

## 13.22 LINEARBRIGHTNESS system variable

### 13.22.1 Linear brightness

Specifies a scaling factor for the intensity of lights. A value between -10 and 10 is accepted. The default value of 0 results in no scaling. Smaller values decrease light intensity and bigger values increase light intensity. This setting can be specified per viewport.

Type:	Short
Saved in:	Drawing
Range:	-10 to 10
Default value:	0



## 13.23 LINEARCONTRAST system variable

### 13.23.1 Linear contrast

Specifies ambient light intensity. A value between -10 and 10 is accepted. A value of -10 results in maximum ambient light. A value of 10 results in no ambient light. This setting only has effect on materials that have a non-black ambient color. This setting can be specified per viewport.

Type:	Short
Saved in:	Drawing
Range:	-10 to 10
Default value:	0

## 13.24 LISPINIT system variable

### 13.24.1 LISP init

Specifies whether LISP variables and functions are preserved between drawings.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Preserved from drawing to drawing 1: Valid in current drawing only

## 13.25 LOADMECHANICAL2D system variable

### 13.25.1 Mechanical 2D enablers

Specifies whether or not demand loading of Mechanical 2D enablers is permitted.

BricsCAD only

Type:	Boolean
Saved in:	Registry



Default value:	Off
Possible values:	Off (0): Loading of Mechanical 2D enablers is not permitted On (1): Loading of Mechanical 2D enablers is permitted

## 13.26 LOCALE system variable

### 13.26.1 Locale

Shows the ISO language code of the current BricsCAD version.

Read-only

Type:	String
Saved in:	Not saved
Default value:	"en_US"

## 13.27 LOCALROOTPREFIX system variable

### 13.27.1 Local root prefix

Stores the full path to the root folder where local files for the current user, such as templates, were installed. The Template and Textures folders are in this location, and you can add any customizable files that you do not want to roam on the network. See ROAMABLEROOTPREFIX for the location of the roaming files.

Read-only

Type:	String Standard
Saved in:	Registry

## 13.28 LOCKUI system variable

### 13.28.1 Lock user interface elements

Specifies which user interface elements are locked to prevent accidental dragging. To override press the Ctrl (Windows) or Cmd (Mac) key while dragging. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
-------	-------




Saved in:	Registry
Range:	-7 to 7
Default value:	0
Possible options:	1: Lock docked toolbars 2: Lock docked panels 4: Lock floating panels and toolbars


## 13.29 LOFTANG1 system variable

### 13.29.1 Loft angle 1

Specifies the draft angle through a loft operation's first cross section.

Type:	Real
Saved in:	Drawing
Range:	0.0 to 360.0
Default value:	90.0

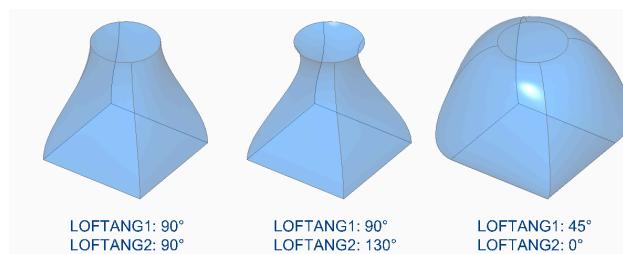

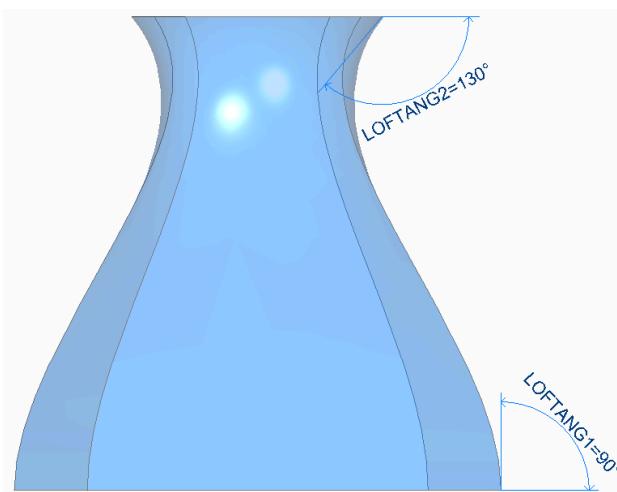



## 13.30 LOFTANG2 system variable

### 13.30.1 Loft angle 2

Specifies the draft angle through a loft operation's ending cross section.

Type:	Real
Saved in:	Drawing
Range:	0.0 to 360.0
Default value:	90.0

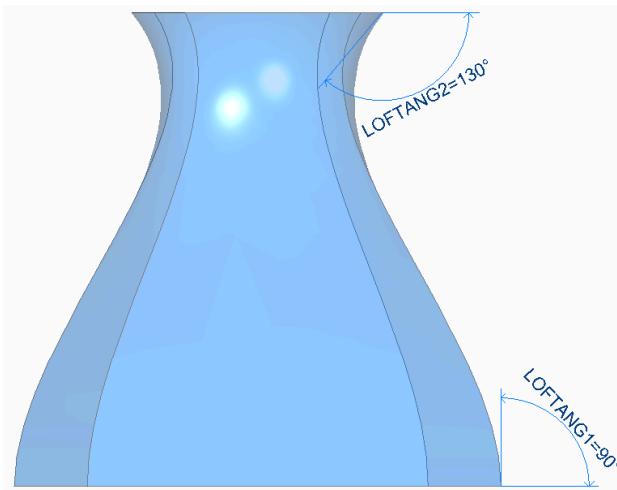

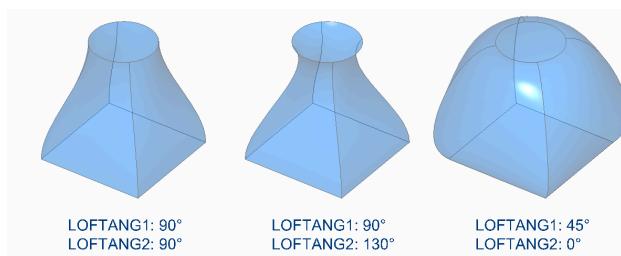


## 13.31 LOFTMAG1 system variable

### 13.31.1 Loft magnitude 1

Specifies the draft angle magnitude through a loft operation's first cross section.

Type:	Real
Saved in:	Drawing
Default value:	0.0

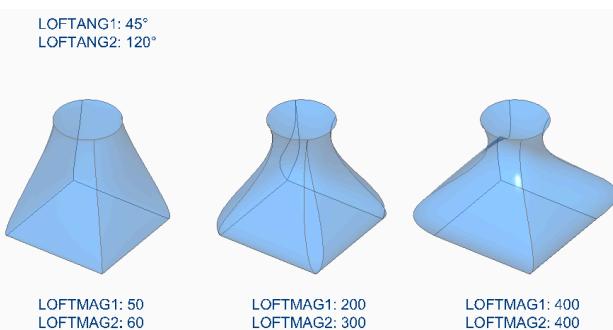


## 13.32 LOFTMAG2 system variable

### 13.32.1 Loft magnitude 2

Specifies the draft angle magnitude through a loft operation's second cross section.

Type:	Real
Saved in:	Drawing
Default value:	0.0

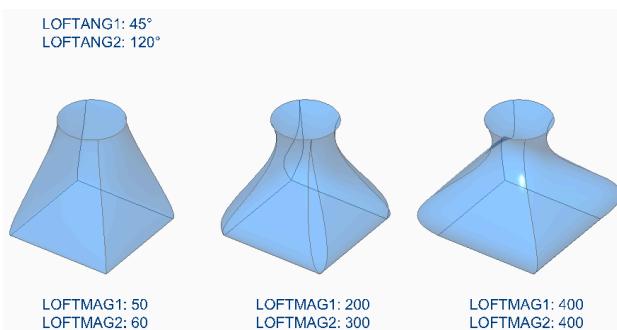

## 13.33 LOFTNORMALS system variable

### 13.33.1 Loft normals

Specifies the normals of lofted entities as they pass through cross sections.

Type:	Short
Saved in:	Drawing
Range:	0 to 6
Default value:	1
Possible values:	<ul style="list-style-type: none"><li>0: Ruled surface</li><li>1: Smooth surface</li><li>2: Surface is normal to the first cross section</li><li>3: Surface is normal to the last cross section</li><li>4: Surface is normal to the first and last cross sections</li><li>5: Surface is normal to all cross sections</li><li>6: Surface uses draft angle and magnitude</li></ul>

## 13.34 LOFTPARAM system variable

### 13.34.1 Loft param

Specifies the shape of lofted surfaces and solids. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 15



Default value:	7
Possible options:	0: No parameters 1: No twist between cross sections 2: Align directions of cross sections 4: Create simple surfaces and solids 8: Close between the starting and ending cross sections

## 13.35 LOGFILEMODE system variable

### 13.35.1 Log file mode

Specifies whether a logfile is maintained or not. A logfile contains each executed command. These logfiles are saved in the folder specified by the LOGFILEPATH system variable.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't maintain log file On (1): Maintain log file

## 13.36 LOGFILENAME system variable

### 13.36.1 Log file name

Specifies the name of the log file.

Read-only

Type:	String
Saved in:	Not saved

## 13.37 LOGFILEPATH system variable

### 13.37.1 Log file path

Specifies the path of the log file.

Type:	String Standard
-------	-----------------



Saved in:	Registry
-----------	----------

## 13.38 LOGGEDIN system variable

### 13.38.1 Logged in

Specifies if you are logged in to your Bricsys account.

BricsCAD only

Read-only

Type:	Boolean
Saved in:	Registry

## 13.39 LOGINNAME system variable

### 13.39.1 Login name

Shows the Windows login name which is saved with the file properties statistics of the drawing.

Read-only

Type:	String
Saved in:	Not saved

## 13.40 LONGITUDE system variable

### 13.40.1 Longitude

Specifies the longitude of the drawing in decimal format. Positive values represent east longitudes.

Type:	Real
Saved in:	Drawing
Range:	-180.0 to 180.0
Default value:	-122.394




## 13.41 LOOKFROMDIRECTIONMODE system variable

### 13.41.1 LookFrom direction mode

Specifies how many view directions can be selected in isometric mode. Holding the Ctrl (Windows) or Cmd (Mac) key switches from top-down to bottom-up directions.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	1
Possible values:	0: orthogonal only (6 directions) 1: no flat view at corners (14 directions) 2: 4 top/down corners(18 directions) 3: 8 top/down corners(26 directions)

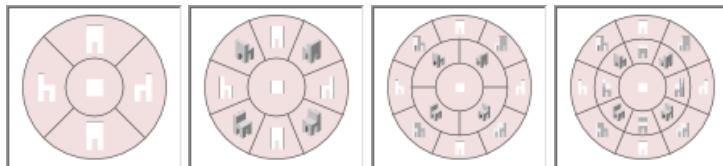

## 13.42 LOOKFROMFEEDBACK system variable

### 13.42.1 LookFrom feedback

Specifies whether the LookFrom control displays messages in tooltips or on the status bar.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	
Default value:	1



Possible values:	0: No tooltips 1: Tooltips next to the Look From control 2: Tooltips in the status bar
------------------	--

## 13.43 LOOKFROMZOOMEXTENTS system variable

### 13.43.1 LookFrom zoom extents

Specifies whether LookFrom will zoom extents whenever a view direction is selected.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Range:	On
Possible values:	Off (0): Zoom extents off On (1): Zoom extents on

## 13.44 LTGAPSELECTION system variable

### 13.44.1 Linetype gap selection

Specifies whether selection or snapping to the gaps on entities defined with non-continuous linetype is possible.

Type:	Boolean
Saved in:	Registry
Range:	Off
Possible values:	Off (0): No selection or snapping within gaps (legacy behavior) On (1): Selection or snapping within gaps

## 13.45 LTSCALE system variable

### 13.45.1 Linetype scale

Stores the global linetype scale factor.

Type:	Real
-------	------



Saved in:	Drawing
Default value:	1.0

## 13.46 LUNITS system variable

### 13.46.1 Linear unit type

Specifies linear units for creating entities.

Type:	Short
Saved in:	Drawing
Range:	1 to 5
Default value:	2
Possible values:	1: Scientific 2: Decimal 3: Engineering 4: Architectural 5: Fractional

## 13.47 LUPREC system variable

### 13.47.1 Linear unit precision

Specifies the number of decimal places displayed for linear units.

Type:	Short
Saved in:	Drawing
Range:	0 to 8
Default value:	4



Possible values:	0 1: 0.0 2: 0.00 3: 0.000 4: 0.0000 5: 0.00000 6: 0.000000 7: 0.0000000
------------------	--

## 13.48 LWDEFAULT system variable

### 13.48.1 Default linewidth

Specifies the default linewidth (in hundredths of millimeters).

Type:	Short
Saved in:	Registry
Range:	0 to 211
Default value:	25
Possible values:	-3: Default (defined by LWDEFAULT) -2: ByBlock -1: ByLayer 0 - 211: Lineweight value in hundredths of millimeters

## 13.49 LWDISPLAY system variable

### 13.49.1 Lineweight display

Specifies whether or not lineweights display in the Model or Layout tab.

Type:	Boolean
Saved in:	Drawing
Range:	Off
Possible values:	Off (0): Don't display linewidth On (1): Display linewidth



## 13.50 LWDISPSCALE system variable

### 13.50.1 Lineweight display scale

Specifies the display scale of lineweights in the Model tab.

BricsCAD only

Type:	Real
Saved in:	Registry
Range:	0.0 to 1.0
Default value:	0.55

## 13.51 LWUNITS system variable

### 13.51.1 Lineweight units

Specifies the unit in which lineweights are displayed: inches or millimeters.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Inches 1: Millimeters



## 14. M

### 14.1 MACROREC system variable

#### 14.1.1 Macro recording

Specifies whether a macro is being recorded.

BricsCAD only

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Macro is not being recorded On (1): Macro is being recorded

### 14.2 MACROTRACE system variable

#### 14.2.1 Macro trace

Toggles a debugging tool for DIESEL expressions On/Off.

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Don't display an evaluation of all DIESEL expressions in the Command line On (1): Display an evaluation of all DIESEL expressions in the Command line

### 14.3 MAKEBAK system variable

#### 14.3.1 Make backup (Obsolete)

Replaced by ISAVEBAK. Has no effect except to preserve the integrity of scripts. Removed 02/12/2010.

BricsCAD only

Type:	Boolean
-------	---------



Saved in:	Registry
-----------	----------

## 14.4 MANIPULATOR system variable

### 14.4.1 Manipulator

Specifies the display of the Manipulator.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Manipulator is not displayed 1: Display Manipulator whenever entities are selected 2: Display Manipulator if left mouse button was pressed longer than MANIPULATORDURATION.


## 14.5 MANIPULATORCOLORTHEME system variable

### 14.5.1 Color theme of Manipulator

Specifies the color theme of the Manipulator.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Monochrome color theme 1: Classic color theme

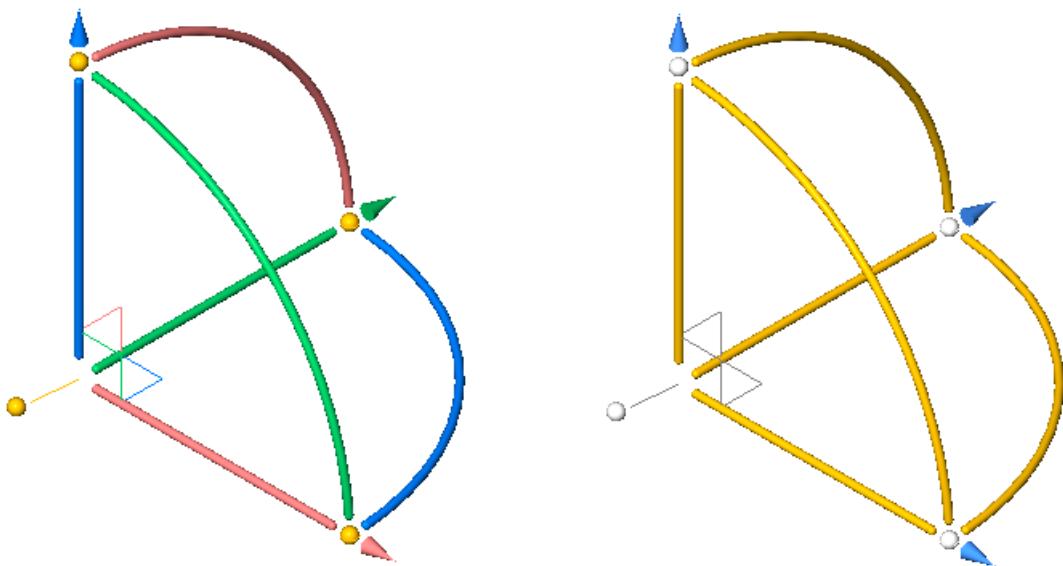

## 14.6 MANIPULATORDURATION system variable

### 14.6.1 Manipulator duration

Specifies how long (in milliseconds) the left mouse button should be pressed during entity selection to trigger the display of the Manipulator.

BricsCAD only

Type:	Long
Saved in:	Registry
Range:	100 to 10000
Default value:	250

## 14.7 MANIPULATORHANDLE system variable

### 14.7.1 Manipulator handle

Specifies the behavior of the anchor handle of the Manipulator. The handle can be used for unconstrained move and copy operations. Unconstrained meaning: not along an axis or constrained to a plane.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Handle moves the Manipulator itself 1: Handle moves the selected entities unrestricted

## 14.8 MANIPULATORSIZE system variable

### 14.8.1 Size of Manipulator

Specifies the size of the Manipulator relative to the default. Acceptable range is [0.5 - 2.0]. Initial value is 1.0.

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.5 to 2
Default value:	1

## 14.9 MASSPREC system variable

### 14.9.1 Mass precision

Specifies the number of decimal places displayed for masses when the mass bit of PROPUNITS is on. If negative, LUPREC (Linear Unit Precision) is used.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-1 to 8
Default value:	-1



Possible values:	-1: Use LUPREC 0: 0 1: 0.0 2: 0.00 3: 0.000 4: 0.0000 5: 0.00000 6: 0.000000 7: 0.0000000 8: 0.00000000
------------------	--

## 14.10 MASSPROPACCURACY system variable

### 14.10.1 Mass properties calculation relative accuracy

Specifies the accuracy to be used for mass properties calculations. This accuracy is relative: the accuracy of the result depends on the magnitude of the calculated value. Acceptable value Range: 2 - 12 (0.01 to 0.000000000001, or 1.e-2 to 1.e-12).

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	2 to 12
Default value:	2
Possible values:	2: 0.01 3: 0.001 4: 0.0001 5: 0.00001 6: 0.000001 7: 0.0000001 8: 0.00000001 9: 0.000000001 10: 0.0000000001 11: 0.00000000001 12: 0.000000000001



## 14.11 MASSUNITS system variable

### 14.11.1 Mass units

Specifies a list of units used for displaying mass when the mass bit of PROPUNITS is on. If empty, all masses are displayed without units.

The MASSUNITS setting affects the mass values only. Other mass properties such as density or moments of inertia are formatted in SI units for the metric system and in imperial units for the imperial system, regardless of the MASSUNITS setting.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	oz lb st mg g kg t

## 14.12 MAXACTVP system variable

### 14.12.1 Maximum active viewports

Specifies the maximum number of viewports that can be active simultaneously in a layout. Has no effect on the number of viewports that are plotted.

Type:	Short
Saved in:	Drawing
Default value:	64

## 14.13 MAXHATCH system variable

### 14.13.1 Maximum hatch dashes

Specifies the maximum number of dashes in a hatch pattern. Hatches of which the number of dashes exceeds the maximum number of dashes cannot be created. Values between 100 and 10000000 are accepted.

BricsCAD only

Type:	Short
Saved in:	Registry



Range:	100 to 10000000
Default value:	100000

## 14.14 MAXSORT system variable

### 14.14.1 Maximum sort

Specifies the maximum number of symbol names, file names, block names or layer names in listing commands. If the number of items exceeds this value, the items are not sorted into alphabetical order.

Type:	Short
Saved in:	Registry
Range:	200

## 14.15 MAXTHREADS system variable

### 14.15.1 Maximum number of threads

Specifies the maximum number of threads used for display and loading of drawings, in case one of the Multi-Threading flags has been set. Value 0 means the program will choose the optimal number of threads.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 16
Default value:	0

## 14.16 MBSTATE system variable

### 14.16.1 Mechanical browser state

Specifies whether the mechanical browser is visible or not.

BricsCAD only

Read-only



Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	1
Possible values:	0: Mechanical browser is invisible 1: Mechanical browser is visible

## 14.17 MBUTTONPAN system variable

### 14.17.1 Middle button pan

Specifies how the middle mouse button or wheel responds.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Support action defined in menu file 1: Support panning

## 14.18 MEASUREINIT system variable

### 14.18.1 Measurement initial

Specifies drawing units as Imperial or metric for new drawings. It also controls whether ANSI or ISO hatch pattern and linetype files are used.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1



Possible values:	0: Imperial (use ANSI Hatch and ANSI Linetype) 1: Metric (use ISO Hatch and ISO Linetype)
------------------	--

## 14.19 MEASUREMENT system variable

### 14.19.1 Measurement

Specifies drawing units as Imperial or metric for the current drawing. It also controls whether ANSI or ISO hatch pattern and linetype files are used.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: Imperial (use ANSI Hatch and ANSI Linetype) 1: Metric (use ISO Hatch and ISO Linetype)

## 14.20 MECH2DSAVEFORMAT system variable

### 14.20.1 Mechanical 2D save format

Specifies the save format of Mechanical 2D entities.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	2013 to 2018
Default value:	2013
Possible values:	2013: 2013 Mechanical 2D 2014: 2014 Mechanical 2D 2015: 2015 Mechanical 2D 2016: 2016 Mechanical 2D 2018: 2018 Mechanical 2D



## 14.21 MENUBAR (EXCEPT OS X) system variable

### 14.21.1 Menu bar

Specifies whether the menu bar is shown or hidden.

Type:	Boolean
Saved in:	Workspace
Range:	0 to 1
Default value:	On
Possible values:	Off (0): Don't show menubar On (1): Show menubar

## 14.22 MENUCTL system variable

### 14.22.1 Menu control

Specifies whether screen menu switches pages in response to keyboard command entry.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Screen menu doesn't switch pages in response to keyboard command entry On (1): Screen menu switches pages in response to keyboard command entry

## 14.23 MENUCHO system variable

### 14.23.1 Menu echo

Specifies menu echo and prompt control. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Not saved



Range:	0 to 15
Default value:	0
Possible options:	1: Suppress menu item echo 2: Suppress system prompts during menu 4: Disable ^P toggle 8: Display input/output strings (DIESEL macros debugging)

## 14.24 MENUNAME system variable

### 14.24.1 Menu name

Shows path and name of the menu file.

Read-only

Type:	String
Saved in:	Registry

## 14.25 MESHTYPE system variable

### 14.25.1 Mesh type

Specifies the type of mesh that is created by REVSURF, TABSURF, RULESURF and EDGESURF. (Not yet supported)

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: Create legacy polygon or polyface mesh 1: Create full-featured mesh entities (recommended)

## 14.26 MIDDLECLICKCLOSE system variable

### 14.26.1 Middle click close (Mac & Linux)

Allows a tab to be closed by middle button click on tab bar On/Off



BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	true

## 14.27 MILLISECS system variable

### 14.27.1 Milliseconds

Counts the number of milliseconds that have passed since system startup.

Read-only


Type:	Long
Saved in:	Not saved

## 14.28 MIRRTEXT system variable

### 14.28.1 Mirror text

Specifies whether text is mirrored by the MIRROR command or not.

Type:	Boolean
Saved in:	Drawing
Range:	On
Possible values:	Off (0): Don't mirror text On (1): Mirror text

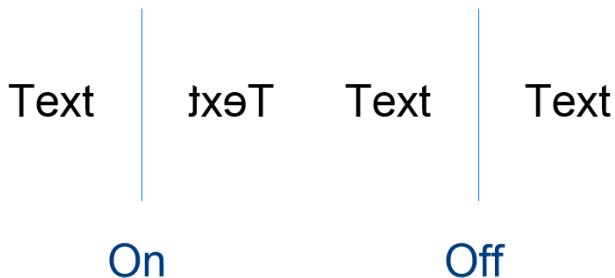



## 14.29 MLEADERSCALE system variable

### 14.29.1 Multileader scale

Specifies the overall width scale factor for multileaders. The scale must have a positive value.

Type:	Real
Saved in:	Drawing
Default value:	1.0

## 14.30 MODEMACRO system variable

### 14.30.1 Mode macro

Displays a text string on the status line, such as the name of the current drawing, time/date stamp or special modes. Used to help debug Diesel programming.

Type:	String
Saved in:	Not saved

## 14.31 MSLTSCALE system variable

### 14.31.1 Model space linetype scale

Scales linetypes displayed on the model tab by the annotation scale. When changing MSLTSCALE, REGEN or REGENALL is needed to update the display.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: No special linetype scaling by the annotation scale 1: Linetypes are scaled by the annotation scale



## 14.32 MSOLESCALE system variable

### 14.32.1 Model space OLE scale

Specifies the size of an OLE (Object Linking & Embedding) object containing text when pasted into model space. This only affects the initial size, entities already placed in the drawing are not affected when MSOLESCALE is modified. If set to zero, scales by DIMSCALE value.

Type:	Real
Saved in:	Drawing
Range:	0.0 or greater
Default value:	1.0

## 14.33 MTEXTCOLUMN system variable

### 14.33.1 Multiline text column setting

Specifies default column setting for multi-line text.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	0
Possible values:	0: No columns 1: Dynamic columns with auto height 2: Dynamic columns with manual height

## 14.34 MTEXTDETECTSPACE system variable

### 14.34.1 Space detection for creating lists in mtext editor

Recognize spaces from the keyboard spacebar in a special meaning (like a tabulation) for creating lists in the mtext editor.

Type:	Boolean
Saved in:	Registry



Range:	On
Possible values:	Off (0): Don't allow spaces for mtext editor lists On (1): Allow spaces for mtext editor lists

## 14.35 MTEXTED system variable

### 14.35.1 Multiline text editor

Specifies the primary and secondary text editors to use for multiline text entities.

Type:	String
Saved in:	Registry

## 14.36 MTEXTFIXED system variable

### 14.36.1 Multiline text fixed

Specifies whether BricsCAD zooms, rotates and/or pans the view to fit the multiline text being edited.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Do nothing when mtext editor is opened 1: Do nothing when mtext editor is opened 2: Rotate / zoom / pan view to fit multiline text

## 14.37 MTEXTTOOLBAR system variable

### 14.37.1 MText Formatting toolbar

Specifies displaying of the Text Formatting toolbar in the mtext editor.

Type:	Boolean
Saved in:	Registry



Range:	On
Possible values:	Off (0): Don't show formatting toolbar On (1): Show formatting toolbar

## 14.38 MTFLAGS system variable

### 14.38.1 Multi-Threading Flags

Bit flags for parallel processing of display and loading. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 511
Default value:	960
Possible options:	1: Parallelized regeneration of display. 2: Parallelized redraw of display. 4: Parallelized loading of drawings. 8: Parallelized calculation of hidden line removal. 16: Parallelized generation of BIM sections to separate destination files. 32: Parallelized generation of BIM sections to the same destination file. 64: Parallelized computations in Direct Modeling commands and operations. 128: Parallelized computations in Assembly commands and operations. 256: Parallelized computations in Sheet Metal commands and operations. 512: Parallelized interference checking 1024: Delayed XREF loading

## 14.39 MYDOCUMENTSFOLDER system variable

### 14.39.1 MyDocuments root folder

Specifies the full path to the user documents root folder. This setting is the source for MYDOCUMENTSPREFIX.

BricsCAD only

Read-only

Type:	String Standard
-------	-----------------



Saved in:	Preference
-----------	------------

### 14.40 MYDOCUMENTSPREFIX system variable

#### 14.40.1 MyDocuments root prefix

Stores the full path to the user documents root folder.

Read-only

Type:	String Standard
Saved in:	Registry

### 14.41 MECHANICALBROWSERSETTINGS system variable




## 15. N

### 15.1 NAVVCUBEDISPLAY system variable

#### 15.1.1 LookFrom display

Specifies whether the LookFrom control is shown on the current viewport.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	On
Possible values:	Off (0): Don't display the LookFrom control On (1): Display the LookFrom control

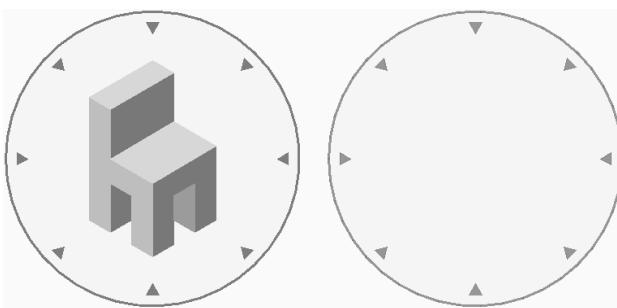

### 15.2 NAVVCUBELOCATION system variable

#### 15.2.1 LookFrom location

Specifies where to display the LookFrom control.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0



Possible values:	0: Top right corner 1: Top left corner 2: Bottom left corner 3: Bottom right corner
------------------	--

## 15.3 NAVVCUBEOPACITY system variable

### 15.3.1 LookFrom opacity

Specifies the opacity of the LookFrom control while inactive.

Type:	Short
Saved in:	Registry
Range:	0 to 100
Default value:	50

## 15.4 NAVVCUBEORIENT system variable

### 15.4.1 LookFrom orientation

Specifies whether the LookFrom control reflects the current WCS or UCS.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: WCS 1: UCS

## 15.5 NAVVCUBESIZE system variable

### 15.5.1 LookFrom size

Specifies the size of the LookFrom control.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 4
Default value:	4
Possible values:	0: Small 1: Medium 2: Large 3: Extra small 4: Automatic


## 15.6 NEARESTDISTANCE system variable

### 15.6.1 Nearest Distance

Specifies nearest distance dimension between pair of selected entities. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 15
Default value:	1
Possible options:	1: Show nearest distance dimension 2: Show OX aligned nearest distance dimension 4: Show OY aligned nearest distance dimension 8: Show OZ aligned nearest distance dimension

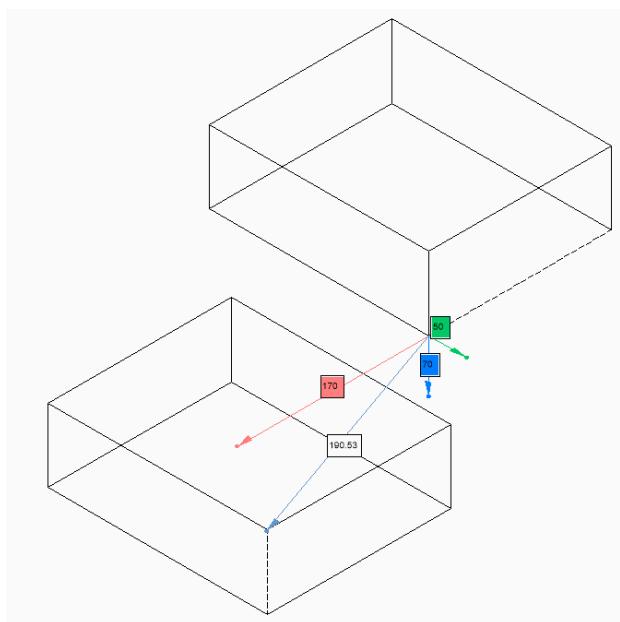

## 15.7 NOMUTT system variable

### 15.7.1 No muttering

Toggles the suppression of message display (muttering). When on, the Command line will stop prompting all the options and actions.

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Don't suppress muttering On (1): Suppress muttering

## 15.8 NORTHDIRECTION system variable

### 15.8.1 North direction

Specifies the angle of the sun from north, in the context of the world coordinate system (WCS).

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 16. O

### 16.1 OBJECTISOLATIONMODE system variable

#### 16.1.1 Object Isolation Mode

Specifies whether entities that are temporarily hidden with HIDEOBJECTS or ISOLATEOBJECTS remain hidden after saving and reopening the drawing.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	<p>0: Entities are temporarily hidden for the current session. Interfered solids are selected together with the interference solids.</p> <p>1: Entities remain hidden between sessions. Interfered solids are selected together with the interference solids.</p> <p>2: Entities are temporarily hidden for the current session. Interfered solids are not selected together with the interference solids.</p> <p>3: Entities remain hidden between sessions. Interfered solids are not selected together with the interference solids.</p>

### 16.2 OBSCUREDCOLOR system variable

#### 16.2.1 Obscured color

Specifies the color of obscured lines. This setting is visible only if OBSCUREDLTYPE is set to a value other than 0.

Type:	Short
Saved in:	Drawing
Range:	0 to 257
Default value:	257
Possible values:	<p>0: ByBlock</p> <p>1 - 255: index</p> <p>256: ByLayer</p> <p>257: ByEntity</p>



## 16.3 OBSCUREDLTYPE system variable

### 16.3.1 Obscured linetype

Specifies the linetype of obscured lines. Unlike regular linetypes, obscured linetypes are zoom level independent.

Type:	Short
Saved in:	Drawing
Range:	0 to 11
Default value:	0
Possible values:	0: Off 1: Solid 2: Dashed 3: Dotted 4: Short Dash 5: Medium Dash 6: Long Dash 7: Double Short Dash 8: Double Medium Dashsettings 9: Double Long Dash 10: Medium Long Dash 11: Sparse Dot

## 16.4 OFFSETDIST system variable

### 16.4.1 Offset distance

Stores the last distance used with the OFFSET command.

Type:	Real
Saved in:	Not saved
Range:	-1.0
Possible values:	<0: draws a parallel copy of an entity through a specified point



## 16.5 OFFSETERASE system variable

### 16.5.1 Offset erase

Specifies whether the OFFSET command erases the source entity or not.

Type:	Boolean
Saved in:	Registry
Range:	Off
Possible values:	Off (0): Offset erase off On (1): Offset erase on

## 16.6 OFFSETGAPTYPE system variable

### 16.6.1 Offset gap type

Specifies how possible gaps in parallel copies of closed polylines are filled.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	0
Possible values:	0: Extend polyline segments 1: Filleted arc segments 2: Chamfered line segments



## 16.7 OLEFRAME system variable

### 16.7.1 OLE frame

Specifies the display of a frame around an OLE (Object Linking & Embedding) entity.



Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: No OLE frames 1: Display and plot OLE frames 2: Display but do not plot OLE frames

## 16.8 OLEHIDE system variable

### 16.8.1 OLE hide

Specifies the visibility of OLE (Object Linking & Embedding) entities for both screen display and plotting.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	0: All OLE entities are visible and plot 1: OLE entities are visible and plot in paper space only 2: OLE entities are visible and plot in model space only 3: No OLE entities are visible or plot

## 16.9 OLEQUALITY system variable

### 16.9.1 OLE quality

Specifies the default plot quality of OLE (Object Linking & Embedding) entities. When set to 3 (Automatic), the quality level is assigned automatically depending on the entity e.g. photographs are set to High.

Type:	Short
Saved in:	Registry
Range:	0 to 3



Default value:	3
Possible values:	0: Monochrome 1: Low graphics 2: High graphics 3: Automatically Select

## 16.10 OLESTARTUP system variable

### 16.10.1 OLE startup

Specifies whether or not the OLE (Object Linking & Embedding) entity source application is launched when plotting.

Type:	Boolean
Saved in:	Drawing
Range:	Off
Possible values:	Off (0): Don't load OLE source application when plotting On (1): Load OLE source application when plotting

## 16.11 OPMSTATE system variable

### 16.11.1 Properties bar state

Specifies whether the properties bar is visible or not.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	1
Possible values:	0: Properties bar is invisible 1: Properties bar is visible



## 16.12 ORBITAUTOTARGET system variable

### 16.12.1 Orbit Auto Target

Specifies how the target point is acquired for the RTROT command.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Off. The target point is located where you clicked to start orbiting 1: On. The target point is located at the center of the entities displayed or selected on screen.

## 16.13 ORTHOMODE system variable

### 16.13.1 Orthogonal mode

Specifies whether cursor movement is constrained to the perpendicular. When on, the cursor can be moved horizontally or vertically only, relative to the current UCS and grid rotation angle as defined by SNAPANG.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Orthogonal mode off On (1): Orthogonal mode on

## 16.14 OSMODE system variable

### 16.14.1 Entity snap mode

Specifies running entity snap modes. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 32767
Possible options:	4135
Possible values:	0: None 1: Endpoint 2: Midpoint 4: Center 8: Node 16: Quadrant 32: Intersection 64: Insertion 128: Perpendicular 256: Tangent 512: Nearest 1024: Geometric center 2048: Apparent intersection 4096: Extension 8192: Parallel 16384: Turn off all snaps

## 16.15 OSNAPCOORD system variable

### 16.15.1 Entity snap coordinates

Specifies whether running entity snaps override keyboard coordinate entry.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Entity snap settings override keyboard coordinate entry 1: Keyboard entry overrides entity snap settings 2: Keyboard entry overrides entity snap settings except in scripts



## 16.16 OSNAPZ system variable

### 16.16.1 Ignore entity snap elevation

Replaces the Z coordinate of the entity snapping point with the current value of the ELEVATION system variable.

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Don't replace Z value with current elevation On (1): Replace Z value with current elevation

## 16.17 OSOPTIONS system variable

### 16.17.1 Entity snap options

Suppresses entity snaps on certain entity types: hatches and/or dimension extension lines or negative z-values in dynamic UCS mode. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 7
Default value:	7
Possible options:	1: Entity snap ignores hatches 2: Entity snap ignores negative Z values in Dynamic UCS mode 4: Entity snap ignores end points of dimension extension lines

## 16.18 OVERKILLAYER system variable

### 16.18.1 Duplicate Entities Layer

This is the layer to which entities are moved when using the option to Move duplicates to Duplicate Entities layer in the OVERKILL command.

BricsCAD only



Type:	String
Saved in:	Registry
Default value:	"Duplicate Entities"



## 17. P

### 17.1 PANBUFFER system variable

#### 17.1.1 Pan buffer

Specifies whether faster panning is enabled, especially in complex drawings.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable faster panning On (1): Enable faster panning

### 17.2 PANELBUTTONSIZE system variable

#### 17.2.1 Panelset icon button size

Preferred size of panelset icon buttons.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	1
Default value:	0 to 2
Possible values:	0: Small buttons 1: Large buttons 2: Extra-large buttons

### 17.3 PAPERUPDATE system variable

#### 17.3.1 Paper update

About automatic papersize adaption when switching printers in print dialog. If ON, existing papersize is maintained. If the printer has no close match, the size will be displayed as 'previous paper size'. On print,



user confirmation is required before substitution by default values. When OFF, always assigns the default papersize of the selected printer.

Type:	Boolean
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	Off (0): Retain papersize when switching printers On (1): Use configured paper size of the plotter configuration file

## 17.4 PARAMETERCOPYMODE system variable

### 17.4.1 Parameter copy mode

Specifies copying of constraints and related parameters when entities are copied.

Type:	Short
Saved in:	Registry
Range:	0 to 4
Default value:	3
Possible values:	0: Do not copy 2D constraints 1: Replace all expressions with constants 2: Use existing parameters, if parameter is missing replace it with constant 3: Use existing parameters, create new parameter if it is missing 4: Use existing parameters, create new parameter if it is missing or has different value

## 17.5 PARAMETRICBLOCKS2DPATH system variable

### 17.5.1 Parametric blocks 2D directory path

Specifies the folder(s) in which BricsCAD should look for user created Parametric Blocks 2D files.

BricsCAD only

Type:	String
-------	--------



Saved in:	Registry
-----------	----------

## 17.6 PDFCACHE system variable

### 17.6.1 PDF cache

Enables/disables the pdf cache. A multi-resolution persistent image cache is used to display attached Pdf underlays, enabling (very) fast zoom and pan operations. The highest cached resolution is 5000 x 5000 pixels. Still, when zooming in very close, the display of the Pdf underlay will become pixelated. So a hybrid modus can be used which switches to real-time generation of crisp Pdf underlay display when zooming in very close. The initial generation of the image cache may take a few seconds, from then on processing gets (very) fast, and remains like that in subsequent sessions.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: No caching, always real time generation 1: Use pdf cache, only use real time generation when zooming in close 2: Always use pdf cache

## 17.7 PDFEMBEDDEDTTF system variable

### 17.7.1 Pdf embedded fonts

Enable embedding of True Type fonts into PDF files.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable embedded TTF fonts On (1): Enable embedded TTF fonts



## 17.8 PDFEXPORTHYPERLINKS system variable

### 17.8.1 Export hyperlinks

Enables export of entity hyperlinks.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disables export of entity hyperlinks On (1): Enables export of entity hyperlinks

## 17.9 PDFEXPORTSOLIDHATCHTYPE system variable

### 17.9.1 Export solid hatches

Solid hatches can be exported as bitmap or using vectorizer or as PDF paths.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	2
Possible values:	0: Export hatches as bitmaps 1: Export hatches using vectorizer 2: Export hatches as PDF paths

## 17.10 PDFFRAME system variable

### 17.10.1 PDF frame

Specifies the visibility of PDF underlay frames.

Type:	Short
Saved in:	Drawing



Range:	0 to 2
Default value:	1
Possible values:	0: Hide PDF frames 1: Display and plot PDF frames 2: Display but do not plot PDF frames

## 17.11 PDFHATCHTOBMPDPI system variable

### 17.11.1 Hatch to bitmap DPI

When a hatch entity is exported as bitmap this value specifies the resolution for the bitmap.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	300

## 17.12 PDFIMAGEANTIALIAS system variable

### 17.12.1 Image anti-aliasing

Enables anti-aliasing for images that require upscaling when exporting.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disables anti-aliasing for images On (1): Enables anti-aliasing for images

## 17.13 PDFIMAGECOMPRESSION system variable

### 17.13.1 Image compression

Compression used for exported images.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	1
Possible values:	0: None 1: JPEG

## 17.14 PDFIMAGEDPI system variable

### 17.14.1 Image DPI

When a raster image is exported this value controls the minimal resolution for the image. Cannot exceed PdfVectorResolutionDPI value.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	300

## 17.15 PDFIMPORTAPPLYLINEWEIGHT system variable

### 17.15.1 Apply linewidth properties

Retains or ignores the linewidth properties of the imported entities.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Ignore the linewidth properties of the imported entities On (1): Retain the linewidth properties of the imported entities



## 17.16 PDFIMPORTASBLOCK system variable

### 17.16.1 Import as block

Imports the PDF file as a block instead of directly into modelspace.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't import PDF files as a block On (1): Import PDF files as a block

## 17.17 PDFIMPORTCONVERTSOLIDSTOHATCHES system variable

### 17.17.1 Convert solid fills to hatches

Converts 2D solid entities into solid-filled hatches.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't convert solid fills to hatches from imported PDF files On (1): Convert solid fills to hatches from imported PDF files

## 17.18 PDFIMPORTIMAGEPATH system variable

### 17.18.1 Raster Images Folder

Location for saving raster images when importing a pdf file containing rasters. The path can be absolute or relative. If PDFIMPORTIMAGEPATH is relative the pdf raster image path will be calculated relative to the folder of the current drawing file. If the path is left empty the folder of the current drawing will be used. The default value is a subfolder "PDF Images" of the current drawing. If the drawing has not yet been saved, rasters will be placed next to the pdf file being imported.

Type:	String
-------	--------



Saved in:	Registry
Default value:	"PDF Images"

## 17.19 PDFIMPORTJOINLINEANDARCSEGMENTS system variable

### 17.19.1 Join line and arc segments

Joins contiguous segments into a polyline where possible.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Range:	On
Possible values:	Off (0): Don't join the line and arc segments from imported PDF files On (1): Join the line and arc segments from imported PDF files

## 17.20 PDFIMPORTLAYERSUSETYPE system variable

### 17.20.1 Layers

Specifies to which layers the entities are imported. It's possible to import to layers which match the PDF layers, to create layers for each PDF entity type, or to just collect all imported entities on the current layer.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: Use PDF Layers 1: Layer per Entity Type 2: Use current layer



## 17.21 PDFIMPORTRASTERIMAGES system variable

### 17.21.1 Raster Images

Extract raster images to PNG files and attach these to the current drawing. The images are stored in a folder controlled by PDFIMPORTIMAGEPATH system variable.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Range:	Off
Possible values:	Off (0): Don't extract the raster images On (1): Extract the raster images

## 17.22 PDFIMPORTSOLIDFILLS system variable

### 17.22.1 Solid fills

Ignore or import solid-filled areas. If these filled areas were originally exported into PDF format from AutoCAD, the solid areas would include solid-filled hatches, 2D solids, wipeout entities, wide polylines, and triangular arrowheads.

**Note:** Solid-filled hatches are assigned a 50% transparency so that entities on top or underneath can be easily seen.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Ignore solid-filled areas. On (1): Import solid-filled areas.

## 17.23 PDFIMPORTTRUETYPETEXT system variable

### 17.23.1 TrueType text

Import TrueType text as TrueType text with its text style named after the font.

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't import the TrueType text On (1): Import the TrueType text

## 17.24 PDFIMPORTTRUETYPETEXTASGEOMETRY system variable

### 17.24.1 Import True Type text as geometry

Specifies whether to import True Type text from a PDF file as geometry.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't import TrueType text as geometry On (1): Import TrueType text as geometry

## 17.25 PDFIMPORTUSEGEOMETRYOPTIMIZATION system variable

### 17.25.1 Import geometry with optimization

Specifies whether to optimize geometry when importing from a PDF file.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't import geometry with optimization On (1): Import geometry with optimization



## 17.26 PDFIMPORTVECTORGEOMETRY system variable

### 17.26.1 Vector geometry

Ignore or Import vector geometry. PDF geometric data types include linear paths, Beziér curves, and solid-filled areas, which are imported as polylines, and 2D solids or solid-filled hatches. Within a tolerance, curves that resemble arcs, circles, and ellipses are interpolated as such. Patterned hatches are imported as many separate entities.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't import vector geometry On (1): Import vector geometry

## 17.27 PDFLAYERSSETTING system variable

### 17.27.1 Pdf layer support

Specifies the use of layers in the target PDF document (PDF v1.5 feature).

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	1
Possible values:	0: Don't use layers 1: Use all layers with visible entities 2: Use all layers with entities, including OFF and FROZEN layers.

## 17.28 PDFLAYOUTSTOEXPORT system variable

### 17.28.1 Pdf layouts to export

Define layout(s) to be exported.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: Active 1: All in multi-sheet file 2: All in single-sheet files

## 17.29 PDFMERGECONTROL system variable

### 17.29.1 Pdf Merge Control

Specifies the appearance of lines that cross.

Lines Overwrite Uses the last plotted line to obscure the lines under it. Only the topmost line is visible at the intersection.

Lines Merge Merges the colors of crossing lines.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	0
Possible values:	0: Lines Overwrite 1: Lines Merge

## 17.30 PDFNOTIFY system variable

### 17.30.1 PDF notify

Enables/disables the notification about missing or modified PDF documents when opening the parent drawing.

BricsCAD only

Type:	Boolean
Saved in:	Registry



Default value:	Off
Possible values:	Off (0): Disable PDF notification On (1): Enable PDF notification

## 17.31 PDFOSNAP system variable

### 17.31.1 PDF entity snap

Enable snapping to entities in the PDF underlay files.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Disable PDF entity snap On (1): Enable PDF entity snap

## 17.32 PDFPAPERHEIGHT system variable

### 17.32.1 Pdf overridden paper height

Paper height to use in the papersize override, in millimeters.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	297

## 17.33 PDFPAPERSIZE OVERRIDE system variable

### 17.33.1 Pdf papersize override

Enables papersize override. If On, the papersize as defined in the BricsCAD Print settings is overridden.

The papersize width and height defined by **PdfPaperWidth** and **PdfPaperHeight** are used instead.

BricsCAD only

Type:	Boolean
-------	---------



Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Disable papersize override On (1): Enable papersize override

## 17.34 PDFPAPERWIDTH system variable

### 17.34.1 Pdf overridden paper width

Paper width to use in the papersize override, in millimeters.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	210

## 17.35 PDFPRCCOMPRESSION system variable

### 17.35.1 PRC Compression

Specifies the compression for PRC 3D data.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: No compression 1: Medium compression 2: High compression



## 17.36 PDFPRCEXPORT system variable

### 17.36.1 PRC Export Mode

Specifies the export mode for PRC 3D data. **Export as BREP** is an experimental mode which may work incorrectly. We recommend using **Export as Mesh** mode.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	0
Possible values:	0: No export 1: Export as BREP (Experimental) 2: Export as Mesh

## 17.37 PDFPRCEXPORTPRODUCTSTRUCTUREMODE system variable

### 17.37.1 PRC Product Structure mode

Specifies whether Product Structure (blocks and block references) is included in the export to a 3D PDF (PRC) file.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Do not export 3D PDF with Product Structure On (1): Export 3D PDF with Product Structure

## 17.38 PDFPRCSINGLEVIEWMODE system variable

### 17.38.1 PRC Single-View Mode

Specifies whether PRC data exports into the single view.

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Do not export PRC data into the single view On (1): Export PRC data into the single view

## 17.39 PDFRENDERDPI system variable

### 17.39.1 Render DPI

Resolution of a rendering when exporting. Cannot exceed PdfVectorResolutionDPI value.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	300

## 17.40 PDFSHXTEXTASGEOMETRY system variable

### 17.40.1 Pdf SHX text as geometry

Enable the conversion of SHX font text to geometry. This might be necessary if the receiving party does not have the same SHX fonts on their computer.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't convert SHX text to geometry On (1): Convert SHX text to geometry



## 17.41 PDFSIMPLEGEOMOPTIMIZATION system variable

### 17.41.1 Pdf simple geometry optimization

Enable simple geometry optimization (separate segments to one polyline, use of Bezier curve control points).

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable simple geometry optimization On (1): Enable simple geometry optimization

## 17.42 PDFTTFFTEXTASGEOMETRY system variable

### 17.42.1 Pdf TTF text as geometry

Enable the conversion of True Type font text to geometry. This is useful for when the TTF files are covered by a license that prohibits sharing, or you want to make it harder to extract text.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't convert TTF text to geometry On (1): Convert TTF text to geometry

## 17.43 PDFUSEPLOTSTYLES system variable

### 17.43.1 Pdf use plotstyles

Enables usage of plotstyles. If On, the plotstyle of the layout controls the color and linewidth in the PDF export.

BricsCAD only

Type:	Boolean
-------	---------



Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disables usage of plotstyles On (1): Enables usage of plotstyles

## 17.44 PDFVECTORRESOLUTIONDPI system variable

### 17.44.1 Vector Resolution DPI

Resolution of vector graphics when exporting. Values between 72 and 40000 are accepted.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	72 to 40000
Default value:	2400

## 17.45 PDFZOOMTOEXTENTSMODE system variable

### 17.45.1 Pdf zoom to extents mode

If exporting model space, zoom to extents first, if the current model space view is zoomed in/out. This zooms the layout geometry to the papersize. When Off (0): use scale and papersize from page setup data instead.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't zoom to extents On (1): Zoom to extents




## 17.46 PDMODE system variable

### 17.46.1 Point display mode

Specifies the display style for point entities. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
	0 to 100
Default value:	0
Possible options:	1: none 0: . 2: + 3: x 4: ' 32: circle 64: square

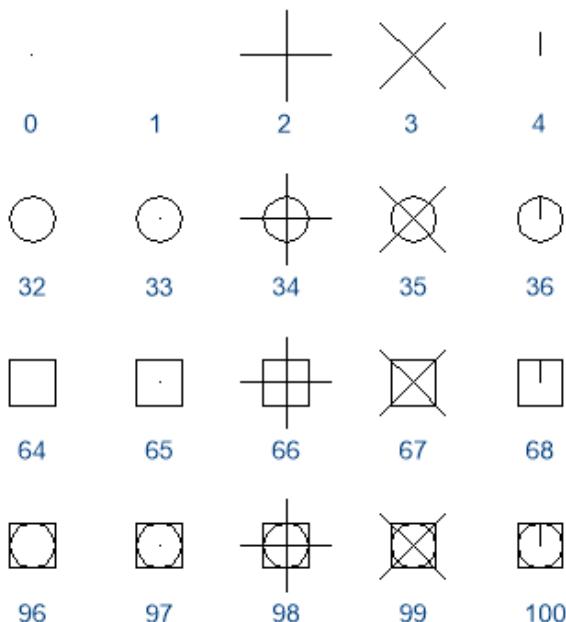



## 17.47 PDSIZE system variable

### 17.47.1 Point display size

Specifies the display size for point entities.

Type:	Real
Saved in:	Drawing
Default value:	0.0
Possible values:	0: 5 percent of the drawing area height >0: Absolute size <0: Percentage of the viewport size

## 17.48 PEDITACCEPT system variable

### 17.48.1 Polyline edit accept

Specifies the display of the 'Entity Selected Is Not a Polyline' prompt in PEDIT. When the prompt is suppressed, the selected entity is automatically converted to a polyline.

Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Display prompt On (1): Suppress prompt

## 17.49 PELLIPSE system variable


### 17.49.1 Polyline ellipse

Specifies the entity type created with the ELLIPSE command real ellipses or polyline representations of an ellipse.

Type:	Boolean
Saved in:	Drawing
Default value:	Off



Possible values:	Off (0): Create real ellipses On (1): Create polyline representations of an ellipse
------------------	--

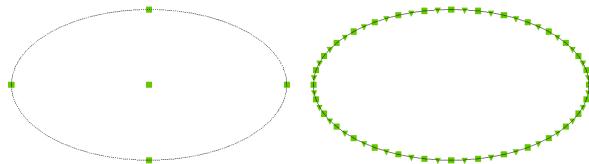

## 17.50 PERIMETER system variable

### 17.50.1 Last perimeter

Specifies the last perimeter calculated by AREA, LIST, or DBLIST.

Read-only

Type:	Real
Saved in:	Not saved

## 17.51 PERSPECTIVE system variable

### 17.51.1 Perspective

Specifies whether the current viewport is displayed in perspective view.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Perspective view off On (1): Perspective view on

## 17.52 PFACEVMAX system variable

### 17.52.1 Polyface mesh maximum vertices

Specifies the maximum number of vertices for each face.

Read-only

Type:	Short
-------	-------



Saved in:	Not saved
Range:	3 or greater
Default value:	4

## 17.53 PHANDLE system variable

### 17.53.1 Palette handle

Gets the current palette handle. 0 equates to True Color.

Type:	Short
Saved in:	Not saved
Range:	0 to 4294967295
Default value:	0

## 17.54 PICKADD system variable

### 17.54.1 Pick add

When Off (0): the most recently selected entities become the selection set. Press and hold SHIFT to add entities.

When On newly selected entities are added to the selection set. Press and hold SHIFT to remove entities.

Type:	Boolean
Saved in:	Registry
Range:	
Default value:	On
Possible values:	Off (0): Don't add selected entities to current selection set On (1): Add selected entities to current selection set



## 17.55 PICKAUTO system variable

### 17.55.1 Pick automatic

Specifies automatic window selection (inside or crossing) while selecting entities. The value is stored as a bitcode using the sum of the values of all selected options. A negative value is the same as 0, but helps in storing the earlier value.

Type:	Short
Saved in:	Registry
Range:	-3 to 3
Default value:	3
Possible options:	negative: Disables window selection 1: Draws a selection window if mouse is not over any entity when clicked 2: Draws a selection window if mouse is clicked over an entity and dragged

## 17.56 PICKBOX system variable

### 17.56.1 Pick box

Specifies the size (in pixels) of the small square at the end of the selection cursor (the entity selection target). If you select an entity by clicking, the Pick Box must touch or overlap the entity. Values between 0 and 50 are accepted.

Type:	Short
Saved in:	Registry
Range:	0 to 50
Default value:	4
Unit	pixels

## 17.57 PICKDRAG system variable

### 17.57.1 Pick drag

Specifies the drawing method for the selection window.



Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Draw selection window using two points On (1): Draw selection window using dragging

## 17.58 PICKFIRST system variable

### 17.58.1 Pick first

Allows to select entities first, then issue a command or vice versa.

Type:	Boolean
Saved in:	Registry
Default value:	1
Possible values:	Off (0): First issue a command, then select entities On (1): First select entities, then issue a command

## 17.59 PICKSTYLE (EXCEPT OS X) system variable

### 17.59.1 Pick style

Specifies the selection of groups and associative hatches. The value of PICKSTYLE is stored as a bitcode using the sum of the values of all selected options.

Ctrl-H toggles PICKSTYLE 0/1 if 0 or 1 and 2/3 if 2 or 3.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	1



Possible options:	0: No group selection or associative hatch selection 1: Group selection if a member of a selectable group is selected, all members of the group are selected 2: Associative hatch selection the hatch and its boundary are selected, no matter what is picked (the hatch or the boundary). 3: Group selection and associative hatch selection
-------------------	--

## 17.60 PICTUREEXPORTSCALE system variable

### 17.60.1 Picture format export scale factor

This is the scaling factor that controls the output resolution for exporting to picture formats (WMF, EMF, BMP). The output view size is current viewsize (in pixels) multiplied by this factor.

Used in commands EXPORT, WMFOUT, COPYCLIP, CUTCLIP and in COM/VBA function

AcadDocument.Export. WARNING scale values of 10 or more may cause slow system response.

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.0 or greater
Default value:	1.0

## 17.61 PLACESBARFOLDER1 system variable

### 17.61.1 First folder (Windows)

Specifies the first folder in the places bar of the nonstandard open file dialog. This enables you to place shortcuts to your favorite drawing folders on your desktop or in your Favorites folder.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 5
Default value:	0



Possible values:	0: Desktop 1: My Computer 2: My Documents 3: Favorites 4: Network 5: My Recent Documents
------------------	---

## 17.62 PLACESBARFOLDER2 system variable

### 17.62.1 Second folder (Windows)

Specifies the second folder in the places bar of the nonstandard open file dialog. This enables you to place shortcuts to your favorite drawing folders on your desktop or in your Favorites folder.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 5
Default value:	1
Possible values:	0: Desktop 1: My Computer 2: My Documents 3: Favorites 4: Network 5: My Recent Documents

## 17.63 PLACESBARFOLDER3 system variable

### 17.63.1 Third folder (Windows)

Specifies the third folder in the places bar of the nonstandard open file dialog. This enables you to place shortcuts to your favorite drawing folders on your desktop or in your Favorites folder.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 5



Default value:	3
Possible values:	0: Desktop 1: My Computer 2: My Documents 3: Favorites 4: Network 5: My Recent Documents

## 17.64 PLACESBARFOLDER4 system variable

### 17.64.1 Fourth folder (Windows)

Specifies the fourth folder in the places bar of the nonstandard open file dialog. This enables you to place shortcuts to your favorite drawing folders on your desktop or in your Favorites folder.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 5
Default value:	5
Possible values:	0: Desktop 1: My Computer 2: My Documents 3: Favorites 4: Network 5: My Recent Documents

## 17.65 PLATFORM system variable

### 17.65.1 Platform

Displays the current version of the Operating System.

Read-only

Type:	String
Saved in:	Not saved



## 17.66 PLINECACHE system variable

### 17.66.1 Polyline cache

Specifies creation of a cache of polyline vertices when a database file is opened.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Disable polyline cache On (1): Enable polyline cache

## 17.67 PLINECONVERTMODE system variable

### 17.67.1 Polyline convert mode


Specifies how to convert splines to polylines.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Create polylines with linear segments 1: Create polylines with arc segments


## 17.68 PLINEGEN system variable

### 17.68.1 Polyline generation

Linetypes are normally generated from vertex to vertex ( 0 ). Polylines of which the vertices are very close together might be rendered as a continuous line, if the linetype pattern does not fit between two subsequent vertices. When set to 1, the linetype is drawn from one end of the polyline to the other end, instead of from vertex to vertex.

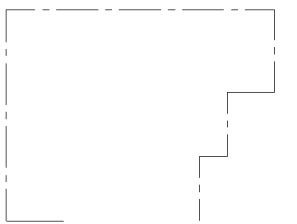

Polyline starts and ends with a dash at each vertex. The linetype will not display on parts that are too small.

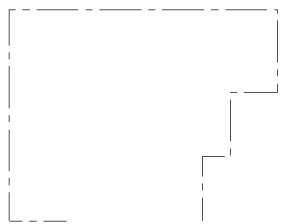

The linetype displays in a continuous pattern around the polyline vertices.

Type:	Boolean
Saved in:	Drawing
Default value:	0
Possible values:	Off (0): Polylines start and end with a dash at each vertex On (1): Linetype in a continuous pattern around the polyline vertices

## 17.69 PLINETYPE system variable

### 17.69.1 Polyline type

Specifies the usage of optimized 2D polylines when creating polylines and the conversion of polylines in older drawings. It saves disk space and memory by using the optimized format.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Polylines in older drawings are not converted; PLINE creates old-format polylines 1: Polylines in older drawings are not converted; PLINE creates optimized polylines 2: Polylines in older drawings are converted; PLINE creates optimized polylines



## 17.70 PLINEWID system variable

### 17.70.1 Polyline width

Specifies the default width for new polylines.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 17.71 PLOTCFGPATH system variable

### 17.71.1 Plotter configuration path

Specifies the paths to the Plotter configuration folders. When printing a layout, the available paper size settings are controlled by a Plotter Configuration File. The Printer/Plotter Configuration list is composed of all printer drivers that are installed on your computer. The Printer Configuration are the files in the folder which is specified by the Plotter Configuration Path. If this is set to a large folder with many files and subfolders, then the entire folder and subfolders are searched for appropriate files. This might cause the print dialog to take a long time to open.

BricsCAD only

Type:	String
Saved in:	Preference

## 17.72 PLOTID system variable

### 17.72.1 Plot id (Obsolete)

Has no effect except to preserve the integrity of old scripts and LISP routines.

Type:	String
Saved in:	Registry

## 17.73 PLOTOUTPUTPATH system variable

### 17.73.1 Plot output path

Specifies the default path for creation of plot files.

BricsCAD only



Type:	String
Saved in:	Preference

## 17.74 PLOTROTMODE system variable

### 17.74.1 Plot rotation mode

Specifies plot orientation.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	<p>0: Rotates the effective plotting area so the corner with the Rotation icon aligns with the paper at the lower left for 0, top left for 90, top right for 180, and lower right for 270. X and Y origin offsets are calculated relative to the lower-left corner</p> <p>1: Aligns lower-left corner of plotting area with lower-left corner of paper</p> <p>2: Same as 0 value, except that the X and Y origin offsets are calculated relative to the rotated origin position</p>

## 17.75 PLOTSTYLEPATH system variable

### 17.75.1 Plot styles path

Specifies the path to the Plot styles folders.

BricsCAD only

Type:	String
Saved in:	Preference

## 17.76 PLOTTER system variable

### 17.76.1 Plotter (Obsolete)

Has no effect except to preserve the integrity of older scripts and LISP routines.

Type:	Short
-------	-------



Saved in:	Registry
-----------	----------

## 17.77 PLOTTRANSPARENCY OVERRIDE system variable

### 17.77.1 Plot transparency override

Specifies whether transparencies are enabled when printing.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1
Possible values:	0: Transparencies are disabled 1: Value from page setup dialog is used 2: Transparencies are enabled

## 17.78 PLQUIET system variable

### 17.78.1 Plot quiet

Specifies whether optional dialog boxes and nonfatal errors display when batch plotting or running scripts.

Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Display plot dialog boxes and nonfatal errors On (1): Log nonfatal errors and don't display plot-related dialog boxes

## 17.79 POINTCLOUD2DVSDISPLAY system variable

### 17.79.1 Point cloud toggle show/hide bounding box in 2D wireframe mode

Point clouds are only displayed in 3D visual style. Otherwise, a bounding box and a warning message are displayed in 2D wireframe mode. This setting provides a way to hide this bounding box and message.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Display point cloud bounding box and warning message that point clouds are not displayed in 2D wireframe visual style 1: Hide bounding box and warning message

## 17.80 POINTCLOUDADAPTIVEDISPLAY system variable

### 17.80.1 Point cloud toggle adaptive vs. fixed point sizes

Point clouds are by default displayed using adaptive point sizes (visually more realistic). However, for point snapping, fixed point sizes are sometimes better.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	1
Possible values:	0: Use fixed point sizes (all points have the same size) 1: Use adaptive point sizes (point sizes are adjusted for a better visual appearance)

## 17.81 POINTCLOUDBOUNDARY system variable

### 17.81.1 Point cloud point boundary

Show the edges of the point cloud bounding box.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1



Possible values:	0: Don't show 1: Only when selected 2: Always show
------------------	--

## 17.82 POINTCLOUDCACHEFOLDER system variable

### 17.82.1 Point Cloud disk cache folder

Specifies the folder where point cloud cache files are stored.

BricsCAD only

Type:	String Standard
Saved in:	Preference
Default value:	{User}AppData/Local/Temp/PointCloudCache

## 17.83 POINTCLOUDCACHESIZE system variable

### 17.83.1 Maximum allowed cache size on disk (Gb)

Maximum allowed size of point cloud cache on disk, in Gb.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	5 to 5000
Default value:	150

## 17.84 POINTCLOUDPOINTMAX system variable

### 17.84.1 Point cloud max points

Maximum number of points displayed per point cloud.

Type:	Short
Saved in:	Registry
Range:	100000 to 50000000



Default value:	5000000
----------------	---------

## 17.85 POINTCLOUDPOINTSIZE system variable

### 17.85.1 Point cloud point size

Point cloud point display size.


Type:	Short
Saved in:	Drawing
Range:	1 to 10
Default value:	2

## 17.86 POLARADDANG system variable

### 17.86.1 Polar add angles

Contains a list of user-defined polar snap angles. Up to 10 angles, up to 25 characters each, separated with semicolons (;). Requires POLARMODE flag 0x04 to be set (Use additional polar tracking angles). The AUNITS system variable sets the format for display of angles. Unlike POLARANG, POLARADDANG angles do not result in multiples of their values.

Type:	String
Saved in:	Registry
Default value:	

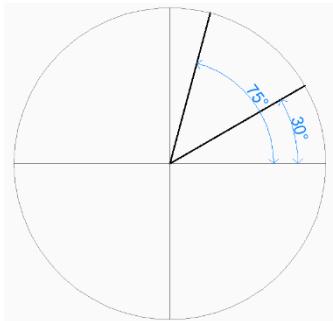



## 17.87 POLARANG system variable

### 17.87.1 Polar angle

Specifies the increment for polar angles (in degrees).

Type:	Real
Saved in:	Registry
Default value:	90.0
Unit	degrees

## 17.88 POLARDIST system variable

### 17.88.1 Polar distance

Specifies the snap increment for polar snap (SNAPTYPE set to 1).

Type:	Real
Saved in:	Registry
Default value:	0.0

## 17.89 POLARMODE system variable

### 17.89.1 Polar mode

Specifies the settings for entity snap tracking and polar snap tracking. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 15
Default value:	1



Possible options:	1: Relative 2: Use polar tracking settings in entity snap tracking 4: Use additional polar tracking angles 8: Press SHIFT to acquire entity snap tracking points
-------------------	---

## 17.90 POLSIDES system variable

### 17.90.1 Polygon sides

Stores the number of sides last used with the POLYGON command. Values between 3 and 1024 are accepted.

Type:	Short
Saved in:	Not saved
Range:	3 to 1024
Default value:	4

## 17.91 POPUPS system variable

### 17.91.1 Popups

Shows the status of the currently configured display driver.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Don't support dialog boxes, the menu bar, and icon menus On (1): Support dialog boxes, the menu bar, and icon menus

## 17.92 PREVIEW\_HEIGHT system variable

### 17.92.1 Preview height

Specifies the height in pixels of generated preview bitmap images.

BricsCAD only



Type:	Long
Saved in:	Registry
Default value:	85

## 17.93 PREVIEW\_WIDTH system variable

### 17.93.1 Preview width

Specifies the width in pixels of generated preview bitmap images.

BricsCAD only

Type:	Long
Saved in:	Registry
Default value:	180

## 17.94 PREVIEWDELAY system variable

### 17.94.1 Delay to preview selection

Specifies how many milliseconds to wait before highlighting the (sub)entity(ies) under the cursor.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1000
Default value:	30

## 17.95 PREVIEWEFFECT system variable

### 17.95.1 Selection preview effect

Specifies how selection preview is displayed. (Not yet supported)

Type:	Short
Saved in:	Registry



Range:	0 to 2
Default value:	2
Possible values:	0: Dashed lines 1: Thickened lines 2: Dashed and thickened lines

## 17.96 PREVIEWFILTER system variable

### 17.96.1 Selection preview filter

Specifies which entity types are excluded from selection previewing. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	to 63
Default value:	1
Possible options:	1: Exclude entities on locked layers 2: Exclude entities in xrefs 4: Exclude tables 8: Exclude multiline text entities 16: Exclude hatch entities 32: Exclude entities in groups

## 17.97 PREVIEWTYPE system variable

### 17.97.1 Preview type

Specifies which view is used for drawing preview thumbnails. (Not yet supported)

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0



Possible values:	0: Last saved view 1: Home view
------------------	------------------------------------

## 17.98 PREVIEWWNDINOPENDLG system variable

### 17.98.1 Preview window in open dialog

Specifies if the preview pane is displayed in the Open dialog box.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Range:	On
Possible values:	Off (0): Don't display preview in the Open dialog box On (1): Display preview in the Open dialog box

## 17.99 PRINTFILE system variable

### 17.99.1 Print file

Specifies the alternate name for plot files.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	.

## 17.100 PRINTPDFPREVIEW system variable

### 17.100.1 Print As PDF Preview

Specifies whether Print As PDF preview uses a system default PDF viewer or an internal program window.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	0 to 1
Default value:	1
Possible values:	0: Use BricsCAD window 1: Use external viewer

## 17.101 PRODUCT system variable

### 17.101.1 Product

Displays the product name.

Read-only

Type:	String
Saved in:	Not saved
Default value:	"BricsCAD"

## 17.102 PROGBAR system variable

### 17.102.1 Progress bar

Specifies the display of the progress bar.

BricsCAD only

Type:	Boolean
Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Don't show progress bar On (1): Show progress bar

## 17.103 PROGRAM system variable

### 17.103.1 Program

Displays the program name.

Read-only



Type:	String
Saved in:	Not saved
Default value:	"BricsCAD"

## 17.104 PROJECTIONTYPE system variable


### 17.104.1 Drawing views position scheme

Switches between first and third angle projection types. These angle projections are a way to represent 3D entities in 2D drawing views. These projection types will show the same views but the difference between the two types is the position of these views (top, right, left, bottom). See Generated drawing views to learn more about it.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	0: First angle projection type (Europe). 1: Third angle projection type (United States, Canada, Australia).



Projection	Symbol
First angle	
Third angle	

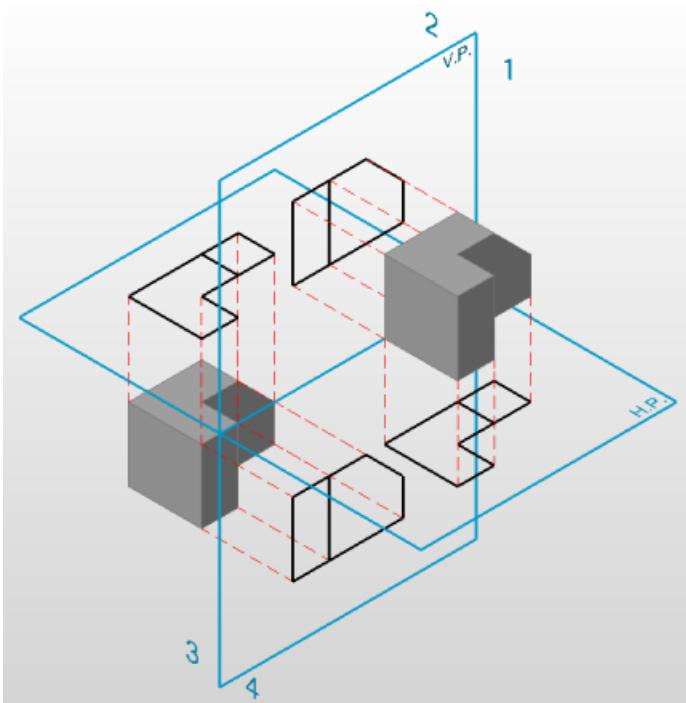



## 17.105 PROJECTNAME system variable

### 17.105.1 Project name

Gives a project name to the current drawing. Project names help to keep track of Xrefs and images easier by assigning additional support paths specific to the project only.

Type:	String
Saved in:	Drawing
Default value:	

## 17.106 PROJECTSEARCHPATHS system variable

### 17.106.1 Project search paths

Stores a list of project names, each holding a list of folders to be searched. If external references and images are not found in the saved path, the project search paths are used to find the external references and images.

BricsCAD only

Type:	String
Saved in:	Preference

## 17.107 PROJMODE system variable

### 17.107.1 Projection mode

Specifies the projection mode for the TRIM and EXTEND commands. If the cutting entity is not in the same plane as the entity you want to TRIM/EXTEND, this system variable defines how the intersection is to be calculated.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1



Possible values:	0: True 3D mode (no projection) 1: Project to the XY plane of the current UCS 2: Project to the current view plane
------------------	--

## 17.108 PROMPTMENU system variable

### 17.108.1 Prompt menu

Specifies the command prompt menu mode.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 5
Default value:	0
Possible values:	0: Don't display prompt menu 1: Display prompt menu 2: Display prompt menu at top left corner 3: Display prompt menu at top right corner 4: Display prompt menu at bottom left corner 5: Display prompt menu at bottom right corner

## 17.109 PROMPTMENUFLAGS system variable

### 17.109.1 Prompt menu flags

Options to finetune the behavior of prompt menus. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 7
Default value:	0



Possible options:	1: Show hidden options. Hidden options display in italics. 2: Hide prompt menu during selection 4: Disable selection options in the prompt menu
-------------------	---

## 17.110 PROMPTOPTIONFORMAT system variable

### 17.110.1 Prompt option format

Specifies how command options are displayed in the Command line prompt. A command option has a keyword, a description and a shortcut. The shortcut is the keyword without lower case characters (a-z). e.g. the third option of the CIRCLE command:

Keyword = TanTanRad

Description = Tangent-Tangent-Radius

Shortcut = TTR

**Note:** The PROMPTOPTIONTRANSLATEKEYWORDS user preference controls whether translations of command option keywords are loaded or not. If disabled, the local keyword will be a copy of the global (English) keyword. As a result global shortcuts can be used without an underscore.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 4
Default value:	0



Possible values:	<p><b>0: Show description only, adjust casing to mark shortcut</b> Select center of circle or [2 Point/3 Point/Tangent-Tangent-Radius/turn Arc into circle/Multiple circles]: This is the default prompt option format in the English version. In other versions the default prompt option format depends on local standards.</p> <p><b>1: Show keyword only</b> Select center of circle or [2Point/3Point/TanTanRad/Arc/Multiple]:</p> <p><b>2: Show description and keyword in brackets</b> Select center of circle or [2 Point(2Point)/3 Point(3Point)/Tangent-Tangent-Radius(TanTanRad)/Turn arc into circle(Arc)/Multiple circles(Multiple)]:</p> <p><b>3: Show description and shortcut in brackets</b> Select center of circle or [2 Point(2P)/3 Point(3P)/Tangent-Tangent-Radius(TTR)/Turn arc into circle(A)/Multiple circles(M)]:</p> <p><b>4: Show local keyword and global keyword in brackets (relevant in localized versions only)</b> Select center of circle or [2Point/3Point/TanTanRad/Arc/Multiple]:</p>
------------------	---

## 17.111 PROMPTOPTIONTRANSLATEKEYWORDS system variable

### 17.111.1 Prompt option translate keywords

Specifies whether translations of command option keywords are loaded or not. If disabled, the local keyword will be a copy of the global (English) keyword. As a result global shortcuts can be used without underscore.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't load translations of keywords On (1): Load translations of keywords

## 17.112 PROPERTYPREVIEW system variable

### 17.112.1 Property preview

Specifies whether selected entities will immediately show property changes when hovering combobox list values in the Properties panel.

Type:	Boolean
-------	---------



Saved in:	Registry
Default value:	On
Possible values:	Off (0): Selected entities won't show property changes when hovering combobox list values in the Properties panel On (1): Selected entities will show property changes when hovering combobox list values in the Properties panel

## 17.113 PROPERTYPREVIEWDELAY system variable

### 17.113.1 Property Preview Delay

Specifies how many milliseconds to wait before preview the hovered property value.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	100 to 10000
Default value:	500

## 17.114 PROPERTYPREVIEWOBJLIMIT system variable

### 17.114.1 Property Preview Object Limit

Specifies the maximum number of entities for Property Preview (no Property Preview if more is selected).

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 30000
Default value:	500

## 17.115 PROPPREVTIMEOUT system variable

### 17.115.1 Property Preview Timeout

Specifies the time (in seconds) allowed for Property Preview generation, before it is canceled.



Type:	Short
Saved in:	Preference
Range:	1 to 5
Default value:	1

## 17.116 PROPUNITS system variable

### 17.116.1 Property units

Specifies whether certain types of property values are automatically formatted (e.g. mm<sup>2</sup>/cm<sup>2</sup>/m<sup>2</sup> for areas), when INSUNITS is not zero.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 255
Default value:	47
Possible values:	1: Format length properties 2: Format area properties 4: Format volume properties 8: (Reserved) 16: Format dynamic dimensions 32: Format mass properties

## 17.117 PROXYGRAPHICS system variable

### 17.117.1 Proxy graphics

Specifies whether images of proxy entities are saved in the drawing. If switched off, a bounding box displays instead.

Type:	Boolean
Saved in:	Drawing
Default value:	On



Possible values:	Off (0): Don't save images with the drawing On (1): Save images with the drawing
------------------	---

## 17.118 PROXYNOTICE system variable

### 17.118.1 Proxy notice

Displays a notice when you open a drawing containing custom entities created by an application that is not present.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display proxy warning On (1): Display proxy warning

## 17.119 PROXYSHOW system variable

### 17.119.1 Proxy show

Specifies how proxy entities display in a drawing.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1
Possible values:	0: Proxy entities are not displayed 1: Graphic images are displayed for all proxy entities 2: Only the bounding box is displayed for all proxy entities

## 17.120 PROXYWEBSEARCH system variable

### 17.120.1 Proxy web search

Specifies whether the program checks for object enablers.



Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Prevent checking for object enablers 1: Check for object enablers only if a live Internet connection is present

## 17.121 PSLTSCALE system variable

### 17.121.1 Paper space linetype scale

Specifies the linetype scaling in paper space. If On or 1, the length of the dashes is based on paper space drawing units. Linetypes display identically, in various viewports which are scaled differently. This means that the linetype scaling is independent from the viewport scale. When changing PSLTSCALE, REGEN or REGENALL is needed to update the display.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: No special linetype scaling 1: Viewport scaling governs linetype scaling

## 17.122 PSOLHEIGHT system variable

### 17.122.1 Polysolid height

Specifies the default height, in drawing units, used by the POLYSOLID command, for swept solid entities.

Type:	Real
Saved in:	Drawing
Default value:	80.0



## 17.123 PSOLIDWIDTH system variable

### 17.123.1 Polysolid width

Specifies the default width, in drawing units, used by the POLYSOLID command, for swept solid entities.

Type:	Real
Saved in:	Drawing
Default value:	5.0

## 17.124 PSPROLOG system variable

### 17.124.1 Postscript prolog

Assigns a name for a prolog section to be read from the acad.psf file when you are using PSOUT.

Type:	String
Saved in:	Registry

## 17.125 PSQUALITY system variable

### 17.125.1 Postscript quality

Specifies the rendering quality of PostScript images, and if they are drawn filled or outlined.

Type:	Short
Saved in:	Registry
Range:	-32768 to 32767
Default value:	75
Possible values:	0: Turns off PostScript image generation <0: Number of pixels per drawing unit for the PostScript resolution >0: Number of pixels per drawing unit but uses the absolute value; show PostScript as outlines and does not fill them



## 17.126 PSTYLEMODE system variable

### 17.126.1 Plot style mode

Indicates the plot style mode of the current drawing: Color-Dependent or Named-Plot-Style. To convert the current drawing to use named or color-dependent plot styles, use CONVERTPSTYLES.

Read-only

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: Named plot style tables 1: Color-dependent plot style tables

## 17.127 PSTYLEPOLICY system variable

### 17.127.1 Plot style policy

Specifies whether the color of an entity is associated with its plot style. If PSTYLEPOLICY is 0, the plot style for new entities is set to the default, defined in DEFPLSTYLE and the plot style for new layers is set to the default, defined in DEFLPLSTYLE.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: No association between color and plot style 1: Associate an entity's plot style with its color

## 17.128 PSVPSCALE system variable

### 17.128.1 Paper space viewport scale

Specifies the scale factor for new viewports. The view scale factor is used with the VPORTS command. The view scale factor is defined by comparing the ratio of units in paper space to the units in newly created



model space viewports. The view scale factor you set is used with the VPORTS command. A value of 0 means the scale factor is Scaled to Fit.

Type:	Real
Saved in:	Drawing
Default value:	0.0

### 17.129 PUBLISHALLSHEETS system variable

#### 17.129.1 Publish all sheets

Specifies whether to load the contents of the active document or of all open documents in the Publish dialog box.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Only the contents of the current document automatically load On (1): The contents of all open documents automatically load

### 17.130 PUCSBASE system variable

#### 17.130.1 Paper space UCS base

Specifies the name of the UCS that defines the orthographic UCS in paper space.

Read-only

Type:	String
Saved in:	Drawing



## 18. Q

### 18.1 QAFLAGS system variable

#### 18.1.1 Quality Assurance flags

Internal system variable with flags for Quality Assurance and testing. The value is stored as a bitcode using the sum of the values of all selected options.

Attention: this is subject to change, and not intended for regular use. Some of these options could have unpredictable or unwanted side-effects.

Type:	Short
Saved in:	Registry
Range:	0 to 32767
Default value:	0
Possible options:	<ul style="list-style-type: none"><li>1: Red device: no low quality draw</li><li>2: No pause during text screen listings</li><li>4: No 'alert' dialogs (text display instead)</li><li>8: Have Warnings act as Errors and stop scripts</li><li>16: Minimal audit report</li><li>32: Disable window recreation on switch between 2d and rendered visual styles.</li><li>64: Enable various performance measurements printed as info prompts</li><li>128: Parallel vectorization: EnableSchedulerLogOutput</li><li>256: Cmd message enable</li><li>512: Dcl take screenshot</li><li>1024: Print time on statusbar</li><li>2048: No crash dump file</li><li>4096: Create assert log file</li><li>8192: Create RED files during rendering</li><li>16384: Parallel vectorization performance measurement</li></ul>

### 18.2 QTEXTMODE system variable

#### 18.2.1 Quick text mode

Specifies how text entities are displayed. When On: this turns on quick text mode, rendering all text – text, mtext, attributes, dimension text, and zo on—as rectangles. When Off (0): this turns off quick text mode, returning text to its normal display. This is useful when drawings contain much text, thereby slowing down





the display of the drawing, but you still need to see the location of the text. The rectangles display the color of the text as well. To view changes on existing entities, perform a REGEN.

Type:	Boolean
Saved in:	Drawing
Range:	Off
Possible values:	Off (0): Don't display box in place of text On (1): Display box in place of text



ZONE 1 is smaller than ZONE 2

The area of ZONE 3 is equal  
to the area of ZONE 1

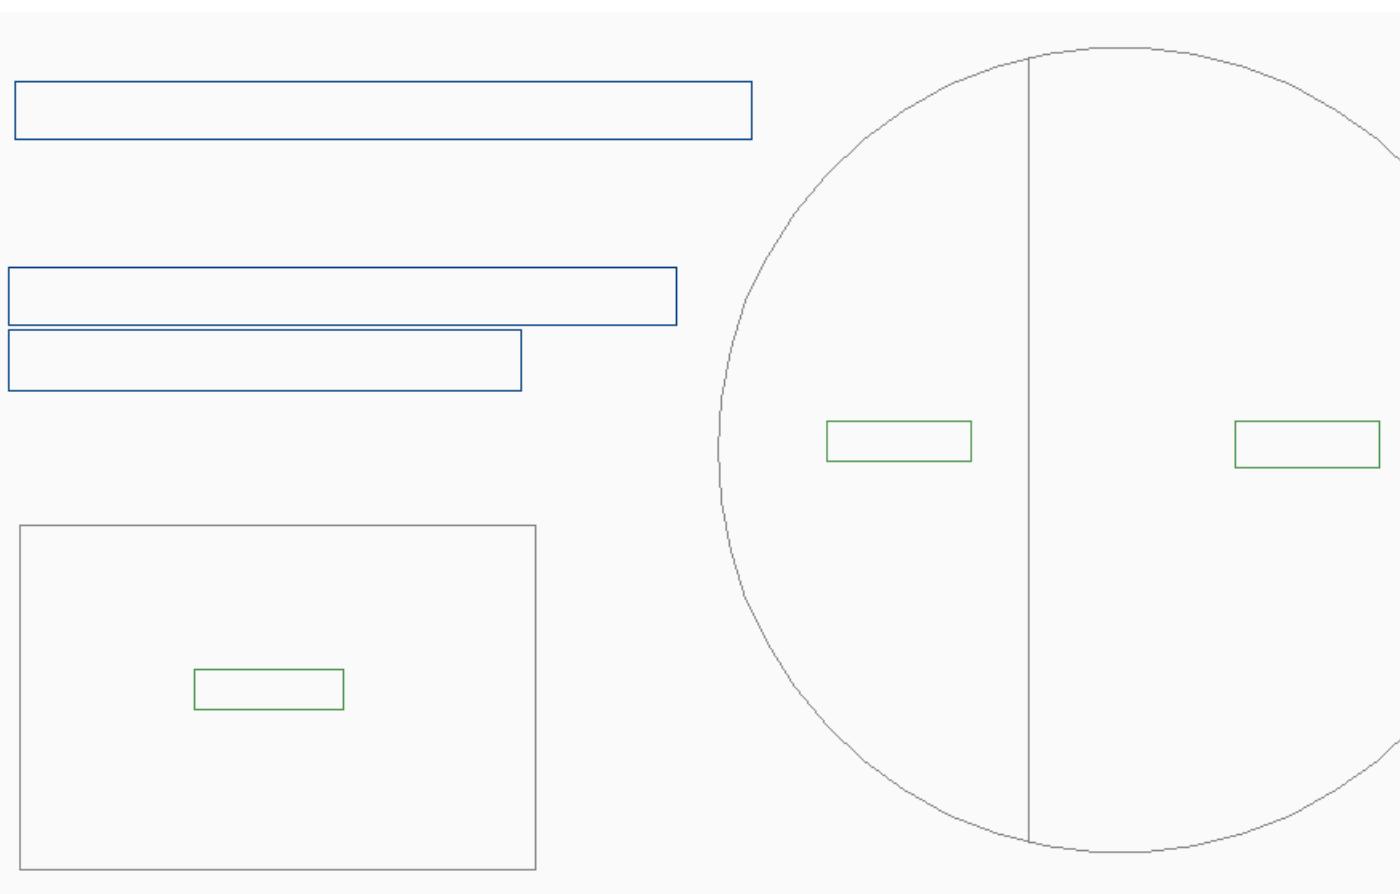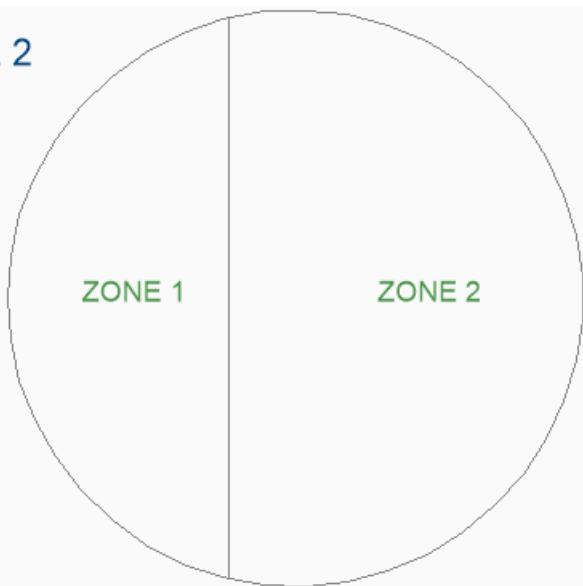



## 18.3 QUADCOMMANDLAUNCH system variable

### 18.3.1 Quad default command launch

Enables launching the default quad command without requiring to click on the button. The default quad command depends on which command from the quad is used last.

When 0: hover over an entity to see the quad and click on the command button to launch the command.

When 1: hover over an entity to see the quad and right-click on the entity to launch the command, instead of clicking on the command button first.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Launch default quad command only by pressing button 1: Launch default quad command on mouse right-click when quad is displayed

## 18.4 QUADDISPLAY system variable

### 18.4.1 Quad display

Specifies when to display the quad. When the value is 8: suppress the quad when hovering over entities that are not in the current selection set; set **Show Quad on right-click**ON to display the Quad. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-15 to 15
Default value:	5



Possible options:	negative: Switch off quad 1: Display the quad when the cursor hovers on an entity 2: Display the quad when entities are selected 4: Display the quad on right click 8: Suppress the quad on hover when entities are selected
-------------------	--

## 18.5 QUADEXPANDELAY system variable

### 18.5.1 Quad expand delay

Specifies the delay after which the quad will expand after mouse-enter.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	160

## 18.6 QUADEXPANDTABDELAY system variable

### 18.6.1 Quad expand tab delay

Specifies the delay after which hovering over a quad tab will expand the underlying buttons.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	50

## 18.7 QUADGOTRSPARENT system variable

### 18.7.1 Quad go transparent

Specifies if the quad starts should go transparent while the mouse is moving away from it.

BricsCAD only

Type:	Boolean
Saved in:	Preference



Default value:	Off
Possible values:	Off (0): Don't go transparent On (1): Go transparent

## 18.8 QUADHIDEDELAY system variable

### 18.8.1 Quad hide delay

Specifies how many milliseconds to wait before the quad is hidden as soon as the mouse stops moving while it's in the QuadHideMargin zone.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	350

## 18.9 QUADHIDEMARGIN system variable

### 18.9.1 Quad hide margin

Specifies the width of a margin around the quad. As long as the mouse keeps moving inside this margin, the quad will stay visible. It will gradually go transparent if QuadGoTransparent is on. As soon as the mouse movement stops, or when the mouse is moved beyond the margin, the quad will disappear.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	50

## 18.10 QUADICONSIZE system variable

### 18.10.1 Quad icon size

Specifies the size of the quad tool buttons.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Workspace
Default value:	1
Possible values:	0: Small icons 1: Large icons 2: Extra-large icons

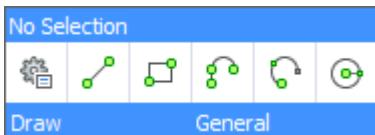


Figura 1: Small Icons



Figura 2: Large Icons

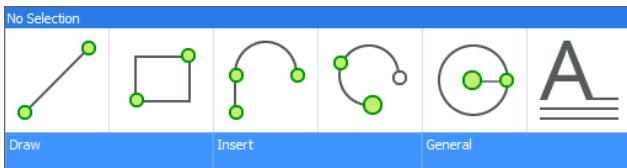


Figura 3: Extra Large Icons

## 18.11 QUADICONSPACE system variable

### 18.11.1 Quad icon space

Specifies the margin around the icons.

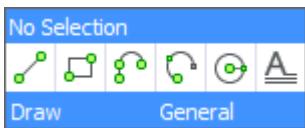


Figura 4: Narrow

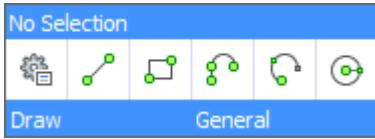


Figura 5: Normal

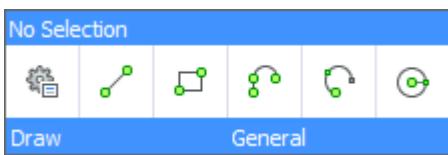


Figura 6: Wide

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	1
Possible values:	0: Narrow 1: Normal 2: Wide

## 18.12 QUADMOSTRECENTITEMS system variable

### 18.12.1 Quad most recent items

Specifies how many most recent items should be displayed in the top bar of the quad. The remaining slots are filled with intelligent suggestions depending on the user context.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 16
Default value:	4

## 18.13 QUADPOPUPCORNER system variable

### 18.13.1 Quad popup corner

Specifies where the quad will popup relative to the current cursor position.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	1
Possible values:	0: Upper right 1: Middle right 2: Lower right

## 18.14 QUADROLLOVERDELAY system variable

### 18.14.1 Quad rollover delay

Specifies the delay after which rollover properties appear on the quad.

**Note:** This is ignored in rollover-only mode (when QUADDISPLAY is off and ROLLOVERTIPS is on - in that case, the rollover properties are always shown immediately)

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 10000
Default value:	0

## 18.15 QUADSHOWDELAY system variable

### 18.15.1 Quad show delay

Specifies how many milliseconds to wait before the quad is shown when highlighting a (sub)entity.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	150



## 18.16 QUADWIDTH system variable

### 18.16.1 Quad width

Specifies in how many columns the quad icons are arranged.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	4 to 16
Default value:	6



## 19. R

### 19.1 R12SAVEACCURACY system variable

#### 19.1.1 R12 Save accuracy

Specifies the number of segments between spline control segments or on 90 degrees elliptical arcs for saving ellipses and splines to R12.

BricsCAD only

Type:	Short
Saved in:	Registry
Default value:	8

### 19.2 R12SAVEDEVIATION system variable

#### 19.2.1 R12 Save deviation

Specifies the deviation for saving ellipses and splines to R12.

BricsCAD only

Type:	Real
Saved in:	Registry
Default value:	0.0

### 19.3 RASTERPREVIEW system variable

#### 19.3.1 Raster preview

Specifies whether or not a preview image is saved with the drawing. This image is displayed by file managers and other programs.

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't create preview image On (1): Create preview image
------------------	---

## 19.4 RE\_INIT system variable

### 19.4.1 Reinitialize Aliases

Reinitializes the digitizer, digitizer port and/or reloads PGP file (command aliases). The value is stored as a bitcode using the sum of the values of all selected options.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 21
Default value:	0
Possible options:	1: Digitizer input/output port reinitialization 4: Digitizer reinitialization 16: PGP file reinitialization (reload)

## 19.5 REALTIMESPEEDUP system variable

### 19.5.1 Realtime speedup

Specifies the number of mouse messages that are skipped during Realtime Pan operations.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 10
Default value:	5

## 19.6 REALWORLDSCALE system variable

### 19.6.1 Real world scale

Specifies the rendering of materials with units set to real-world scale.



Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Don't render real-world scale materials On (1): Render real-world scale materials

## 19.7 RECENTFILES system variable

### 19.7.1 Recent file list max count

Specifies the maximum number of files shown in the "Recent Files" section in the File menu (MRU's).

Values between 0 and 60 are accepted.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 60
Default value:	12

## 19.8 RECENTPATH system variable

### 19.8.1 Recent path

Shows the most recently used path.

BricsCAD only

Type:	String Standard
Saved in:	Preference

## 19.9 REDHILITE\_DUCSLOCKED\_FACE\_ALPHA system variable

### 19.9.1 Face opacity

Specifies the transparency of the highlighted face to which the Dynamic UCS has been locked by pressing the Shift key. 0 is fully transparent and 100 is fully opaque.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	25 to 100
Default value:	25

## 19.10 REDHILITE\_DUCSLOCKED\_FACE\_COLOR system variable

### 19.10.1 Face color

Specifies the highlight color of a face to which the Dynamic UCS has been locked by pressing the Shift key.  
BricsCAD only

Type:	String
Saved in:	Preference
Default value:	#007AFF

## 19.11 REDHILITE\_HIDDENEDGE\_ALPHA system variable

### 19.11.1 Edge opacity

Specifies the transparency of the edge. 0 is fully transparent and 100 is fully opaque.  
BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	50

## 19.12 REDHILITE\_HIDDENEDGE\_COLOR system variable

### 19.12.1 Edge color

Specifies the color of the edge.  
BricsCAD only



Type:	String
Saved in:	Preference
Default value:	White (Settings dialog) #FFFFFF (Command line)

## 19.13 REDHILITEFULL\_EDGE\_ALPHA system variable

### 19.13.1 Edge opacity

Specifies the transparency of the edge. 0 is fully transparent and 100 is fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	100

## 19.14 REDHILITEFULL\_EDGE\_COLOR system variable

### 19.14.1 Edge color

Specifies the color of the edge.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	0, 122, 255 (Settings dialog) #007AFF (Command line)

## 19.15 REDHILITEFULL\_EDGE\_SHOWHIDDEN system variable

### 19.15.1 Hidden edges

Specifies whether hidden edges should be displayed.

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't show hidden edges On (1): Show hidden edges

## 19.16 REDHILITEFULL\_EDGE\_SMOOTHING system variable

### 19.16.1 Edge smoothing

Specifies whether to display smooth (anti-aliased) lines.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Smooth edges off On (1): Smooth edges on

## 19.17 REDHILITEFULL\_EDGE\_THICKNESS system variable

### 19.17.1 Edge thickness

Specifies the thickness of the edge (in pixels).

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.0 to 20.0
Default value:	2.0



## 19.18 REDHILITEFULL\_FACE\_ALPHA system variable

### 19.18.1 Face opacity

Specifies the transparency of the face. 0 is fully transparent and 100 is fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	10

## 19.19 REDHILITEFULL\_FACE\_COLOR system variable

### 19.19.1 Face color

Specifies the color of the face.

BricsCAD only

Type:	String
Saved in:	Preference
Possible values:	0, 122, 255 (Settings dialog) #007AFF (Command line)

## 19.20 REDHILITEPARTIAL\_SELECTEDEDGE\_ALPHA system variable

### 19.20.1 Edge opacity

Specifies the transparency of the edge. 0 is fully transparent and 100 is fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	100



## 19.21 REDHILITEPARTIAL\_SELECTEDEDGE\_COLOR system variable

### 19.21.1 Edge color

Specifies the color of the edge.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	255, 128, 0 (Settings dialog) #FF8000 (Command line)

## 19.22 REDHILITEPARTIAL\_SELECTEDEDGE\_SHOWGLOW system variable

### 19.22.1 Glow

Specifies whether a second line below the primary line is shown, which can be used for glow effect.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't show glow On (1): Show glow

## 19.23 REDHILITEPARTIAL\_SELECTEDEDGE\_SMOOTHING system variable

### 19.23.1 Edge smoothing

Specifies whether to display smooth (anti-aliased) lines.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On



Possible values:	Off (0): Smooth edges off On (1): Smooth edges on
------------------	--

## 19.24 REDHILITEPARTIAL\_SELECTEDEDGE\_THICKNESS system variable

### 19.24.1 Edge thickness

Specifies the thickness of the edge (in pixels).

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.0 to 20.0
Default value:	2.0

## 19.25 REDHILITEPARTIAL\_SELECTEDEDGEGLOW\_ALPHA system variable

### 19.25.1 Glow opacity

Specifies the transparency of the glow. 0 is fully transparent and 100 is fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	75

## 19.26 REDHILITEPARTIAL\_SELECTEDEDGEGLOW\_COLOR system variable

### 19.26.1 Glow color


Specifies the color of the glow.

BricsCAD only

Type:	String
-------	--------



Saved in:	Preference
Default value:	White (Settings dialog) #FFFFFF (Command line)

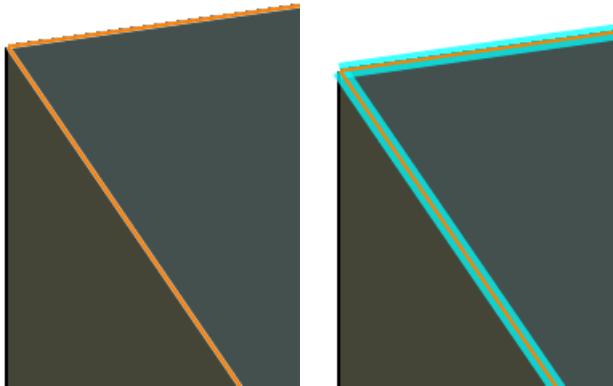

## 19.27 REDHILITEPARTIAL\_SELECTEDEDGEGLOW\_SMOOTHING system variable

### 19.27.1 Glow smoothing

Specifies whether to display smooth (anti-aliased) lines for glow.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Smooth glow lines off On (1): Smooth glow lines on

## 19.28 REDHILITEPARTIAL\_SELECTEDEDGEGLOW\_THICKNESS system variable

### 19.28.1 Glow thickness


Specifies the thickness of the glow (in pixels).

BricsCAD only

Type:	Real
-------	------



Saved in:	Preference
Range:	0.0 to 20.0
Default value:	3.0

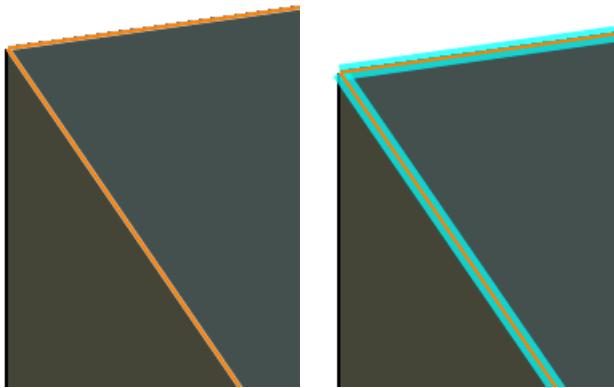

## 19.29 REDHILITEPARTIAL\_SELECTEDFACE\_ALPHA system variable

### 19.29.1 Face opacity

Specifies the transparency of the face. 0 is fully transparent and 100 is fully opaque.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 100
Default value:	10

## 19.30 REDHILITEPARTIAL\_SELECTEDFACE\_COLOR system variable

### 19.30.1 Face color

Specifies the color of the face.

BricsCAD only

Type:	String
-------	--------



Saved in:	Preference
Default value:	#007AFF

## 19.31 REDHILITEPARTIAL\_UNSELECTEDEDGE\_SHOWHIDDEN system variable

### 19.31.1 Hidden edges

Specifies whether hidden edges should be displayed.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't show hidden edges On (1): Show hidden edges

## 19.32 REDSDKLINESMOOTHING system variable

### 19.32.1 Line smoothing

Specifies whether line smoothing is enabled for 3d rendering modes. Has no effect if anti-aliasing is on.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Line smoothing off On (1): Line smoothing on

## 19.33 REFEDITLOCKNOTINWORKSET system variable

### 19.33.1 Refedit lock

Specifies whether entities that are not in the working set will be locked during the **RefEdit** command.  
Locked entities are seen, but cannot be edited.

BricsCAD only



Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Lock entities not in working set off On (1): Lock entities not in working set on

## 19.34 REFEDITNAME system variable

### 19.34.1 Refedit name

Shows the name of the currently edited reference.

Read-only

Type:	String
Saved in:	Not saved
Default value:	

## 19.35 REGENMODE system variable

### 19.35.1 Regeneration mode

Toggles the automatic regeneration of the drawing On/Off. BricsCAD will regenerate the display automatically when REGENMODE is On, but in a few cases a forced regeneration of the drawing might be necessary. This is done by the REGEN command.

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Turn off REGENAUTO command On (1): Turn on REGENAUTO command



## 19.36 REGEXPAND system variable

### 19.36.1 Registry paths expanding type

Specifies type of storing paths in a registry (absolute or expandable). The new value is applied after application re-start.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't store paths in a portable format using environment variables On (1): Store paths in a portable format using environment variables

## 19.37 REMEMBERFOLDERS system variable

### 19.37.1 Remember folders

Specifies the default path for the standard file selection dialog boxes.

When 0: When you start the program by double-clicking a shortcut icon, if a Start In path is specified for the icon, that path is used as the default for all standard file selection dialog boxes.

When 1: The default path in each standard file selection dialog box is the last path used in that dialog box. The Start In folder specified for the shortcut icon is not used.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Use Start In path 1: Use last path used

## 19.38 RENDERCOMPOSITIONMATERIAL system variable

### 19.38.1 Render composition material

Controls whether composition materials in a BIM model are rendered or not in the BIM, Modeling, Realistic or X-Ray visual style. The variable is available in the BIM and Ultimate license level only.



BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0-1 (On-Off)
Default value:	0
Possible values:	0: Do not render the materials of compositions and their plies. 1: Render the materials of compositions and their plies.

## 19.39 RENDERMATERIALDOWNLOAD system variable

### 19.39.1 Download missing resources for render materials

Specifies whether some missing resources for render materials are downloaded automatically.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't download missing resources for render materials On (1): Download missing resources for render materials

## 19.40 RENDERMATERIALSPATH system variable

### 19.40.1 Render materials directory path

Specifies the folder(s) in which BricsCAD should look for user created render material files.

BricsCAD only

Type:	String
Saved in:	Registry



## 19.41 RENDERUSINGHARDWARE system variable

### 19.41.1 Render using hardware

Specifies if rendering should use the hardware. Switch this off if you encounter rendering problems caused by graphic card or driver. The application might need to be restarted after changing this setting.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	1
Possible values:	0: Use software only (slower) 1: Prefer hardware (faster) 2: Prefer software (only for testing purposes) 3: Use hardware only (only for testing purposes)

## 19.42 REPORTPANELMODE system variable

### 19.42.1 Report panel mode

Specifies the mode of report panel. Applicable only for commands which support it.

- Classic: Report panel has its classic appearance as dockable window.
- Modern: Report panel is a transparent window.
- Hidden: Report panel is a transparent window that is hidden into the status bar.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 2
Default value:	2
Possible values:	0: Classic 1: Modern 2: Hidden



## 19.43 REPOSITORYFOLDER system variable

### 19.43.1 Repository folder

Specifies the path to the current repository.

BricsCAD only

Type:	String Standard
Saved in:	Registry

## 19.44 RESTORELOSTFOCUS system variable

### 19.44.1 Restore lost focus (Linux)

Specifies whether to restore a lost focus. Depending on window manager, focus may be lost by using short-lived windows like quad, tipsto.

Type:	Boolean
Saved in:	Registry
Possible values:	Off (0): Do not try to recover from focus loss. On (1): Attempt automatic recovery from focus loss.

## 19.45 RETINADISPLAY system variable

### 19.45.1 Retina Display

Toggles showing Retina resolution in the drawing area On/Off. This setting is only available for Mac.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Enable Retina resolution On (1): Disable Retina resolution




## 19.46 REVCLLOUDARCSTYLE system variable

### 19.46.1 Revision cloud default arc style

Specifies the default arc style for revision clouds: Normal or Calligraphy.

Type:	Short
Saved in:	Registry
Default value:	0
Possible values:	0: Normal 1: Calligraphy

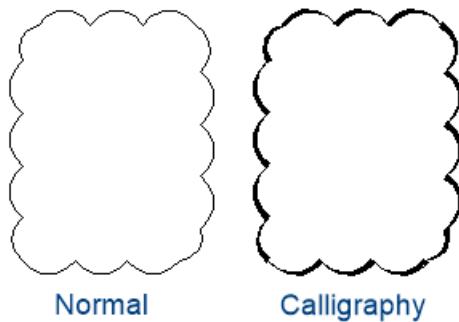


## 19.47 REVCLLOUDCREATEMODE system variable

### 19.47.1 Revision cloud creation mode

Specifies the default mode for creating revision clouds.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1
Possible values:	0: Freehand 1: Rectangular 2: Polygonal

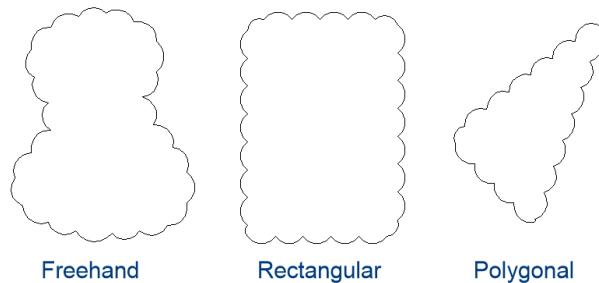

## 19.48 REVCLLOUDGRIPS system variable

### 19.48.1 Revision cloud grips

Specifies how grips are displayed for revision cloud entities.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Displays grips on every arc segment On (1): Displays only the most relevant grips

## 19.49 REVCLLOUDMAXARCLENGTH system variable

### 19.49.1 Revision cloud default maximum arc length

Specifies the default maximum arc length for revision clouds. The maximum arc length is multiplied by the value of the DIMSCALE variable.

Type:	Real
Saved in:	Registry
Default value:	0.375

## 19.50 REVCLLOUDMINARCLENGTH system variable

### 19.50.1 Revision cloud default minimum arc length

Specifies the default minimum arc length for revision clouds. The minimum arc length is multiplied by the value of the DIMSCALE variable.

Type:	Real
-------	------



Saved in:	Registry
Default value:	0.375

## 19.51 RHINOVERSION system variable

### 19.51.1 Rhino version

Version of the 3dm file (open-source 3D modal format).

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	2 to 60
Default value:	60
Possible values:	2: Rhino 2 3: Rhino 3 4: Rhino 4 50: Rhino 5 60: Rhino 6

## 19.52 RIBBONDOCKEDHEIGHT system variable

### 19.52.1 Ribbon docked height

Stores the preferred height of the ribbon bar. The height can have values between 0 and 500. For automatic height calculation set value to 0.

Type:	Short
Saved in:	Registry
Range:	0 to 500
Default value:	0



## 19.53 RIBBONPANELMARGIN system variable

### 19.53.1 Panel margin

Size, in pixels, of blank space at ribbon panel edges.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 50
Default value:	8

## 19.54 RIBBONSTATE system variable

### 19.54.1 Ribbon state

Indicates whether the ribbon bar is shown or not. The ribbon can be closed with the RIBBONCLOSE command and can be displayed with the RIBBON command.

Read-only

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Don't show ribbon bar Registry On (1): Show ribbon bar

## 19.55 RIBBONTOOLSIZE system variable

### 19.55.1 Ribbon tool size

Specifies the size of the ribbon tool buttons.

BricsCAD only

Type:	Short
Saved in:	Workspace



Range:	0 to 2
Default value:	0
Possible values:	0: Small buttons 1: Large buttons 2: Extra-large buttons

## 19.56 ROAMABLEROOTFOLDER system variable

### 19.56.1 Roamable root folder

Specifies the full path to the root folder where roamable files for the current user, such as menus and plotstyles, were installed. This setting is the source for ROAMABLEROOTPREFIX.

BricsCAD only

Read-only

Type:	String Standard
Saved in:	Preference

## 19.57 ROAMABLEROOTPREFIX system variable

### 19.57.1 Roamable root prefix

Stores the full path to the root folder where roamable files for the current user, such as menus and plotstyles, were installed.

Read-only

Type:	String Standard
Saved in:	Registry

## 19.58 ROLLOVEROPACITY system variable

### 19.58.1 Rollover opacity

Specifies a degree of opacity for the quad when it's in rollover state. Between 10 (very transparent) and 100 (fully opaque).

Type:	Short
-------	-------



Saved in:	Registry
Range:	10 to 100
Default value:	100

## 19.59 ROLLOVERSELECTIONSET system variable

### 19.59.1 Rollover selection set

Specifies if/how the rollover tips show properties of hovered selection set. (setting the value to 2 can be slow on large selection sets).

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	2
Possible values:	0: No selection set properties 1: General selection set properties 2: Properties shared by all selected entities

## 19.60 ROLLOVERTIPS system variable

### 19.60.1 Rollover tips

Specifies whether entity properties are displayed in the quad while hovering.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't show properties on hover On (1): Show properties on hover



## 19.61 RTDISPLAY system variable

### 19.61.1 Realtime display

Specifies whether raster images and OLE entities fully display during Realtime ZOOM or PAN or as outlines only.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Display raster images and OLE content 1: Display outlines only

## 19.62 RTROTATIONSPEEDFACTOR system variable

### 19.62.1 Realtime Rotation Speed Factor

Specifies the rotation speed for the Look and Walk tools (rtlook and rtwalk commands) [0.01 - 100].

BricsCAD only

Type:	Real
Saved in:	Preference
Range:	0.01 to 100.
Default value:	1

## 19.63 RUBBERBANDCOLOR system variable

### 19.63.1 Rubberband color

Specifies the color for the Rubberband line. Values between 1 and 255 are accepted.

BricsCAD only

Type:	Short
Saved in:	Registry



Range:	1 to 255
Default value:	40

## 19.64 RUBBERBANDSTYLE system variable

### 19.64.1 Rubberband dashed style

Enables or disables the dashed visualization for the rubberband.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Dashed style off On (1): Dashed style on

## 19.65 RUBBERSHEET (for OS X) system variable

### 19.65.1 Rubbersheet Touchpad

Specifies whether to allow simultaneous zoom/rotate/pan by dual finger move on touchpad.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Dual finger touch simultaneously zooms/rotates/pans off On (1): Dual finger touch simultaneously zooms/rotates/pans on

## 19.66 RUBBERSHEETSENSIBILITY (FOR OS X) system variable

### 19.66.1 Rubbersheet gesture activation sensibility

Specifies how easy touchpad gestures are activated.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 10
Default value:	5

## 19.67 RUNASLEVEL system variable

### 19.67.1 Run as license level

Specifies at which license level to run BricsCAD. The new level will be in use after restarting. If the purchased license level is lower than RUNASLEVEL, RUNASLEVEL is ignored.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 5
Default value:	5
Possible values:	0: Lite 1: Pro 2: Platinum (Obsolete) 3: BIM 4: Mechanical 5: Ultimate



## 20. S

### 20.1 SAFEMODE system variable

#### 20.1.1 Safe mode

Specifies if executable code can be loaded and executed in the current session. Starting in a clean environment can help to eliminate potential causes of a crash.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Allows executable code run On (1): Does not allow executable code to run

### 20.2 SAVECHANGETOLAYOUT system variable

#### 20.2.1 Save changes to layout

Specifies whether to save changes the user makes in print dialog to the layout.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On

### 20.3 SAVEFIDELITY system variable

#### 20.3.1 Save fidelity

Specifies whether the drawing is saved with visual fidelity. Controls whether the current display of the drawing is preserved when opened in a program that does not support annotative entities.

Type:	Boolean
Saved in:	Registry



Range:	0 to 1
Default value:	On
Possible values:	Off (0): Don't save with visual fidelity On (1): Save with visual fidelity

## 20.4 SAVEFILE system variable

### 20.4.1 Save file name

Specifies the current automatic save file name.

Read-only

Type:	String
Saved in:	Not saved

## 20.5 SAVEFILEPATH system variable

### 20.5.1 Save file path

Specifies the path to the folder where automatic saves and temporary files are stored.

Type:	String Standard
Saved in:	Registry

## 20.6 SAVEFORMAT system variable

### 20.6.1 Save format

Specifies the default save format for a drawing.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	1 to 39
Default value:	4



Possible values:	1: DWG 2018 2: DXF 2018 3: Binary DXF 2018 4: DWG 2013 5: DXF 2013 6: Binary DXF 2013 7: DWG 2010 8: DXF 2010 9: Binary DXF 2010 10: DWG 2007 11: DXF 2007 12: Binary DXF 2007 13: DWG 2004 14: DXF 2004 15: Binary DXF 2004 16: DWG 2000 17: DXF 2000 18: Binary DXF 2000 19: DWG R14 20: DXF R14 21: Binary DXF R14 22: DWG R13 23: DXF R13 24: Binary DXF R13 25: DWG R11/R12 26: DXF R11/R12 27: Binary DXF R11/R12 28: DXF R10 29: Binary DXF R10 30: DXF R9
------------------	--

## 20.7 SAVELAYERSAPSHOT system variable

### 20.7.1 Save Layer Snapshot with view

Specifies whether to save the layer settings with newly created views.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On



## 20.8 SAVENAME system variable

### 20.8.1 Saved drawing name

Shows the file name and folder path of the current drawing.

Read-only

Type:	String
Saved in:	Not saved

## 20.9 SAVEONDOCSWITCH system variable

### 20.9.1 Save on document switch

Specifies whether the drawing is saved automatically when another document is activated.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't save on doc switch On (1): Save on doc switch

## 20.10 SAVEROUNDTRIP system variable

### 20.10.1 Save roundtrip

Specifies the saving of information in a database file to allow round-tripping of entity types not supported in the save file format.

BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On



## 20.11 SAVETIME system variable

### 20.11.1 Save time interval

Specifies the interval, in minutes, for automatic saves. If set to zero, automatic saves are turned off. Values between 0 and 240 are accepted.

Type:	Short
Saved in:	Registry
Range:	0 to 240
Default value:	60
Possible values:	0: Turn off automatic saving 1 - 240: Saves the drawing at intervals specified (in minutes)

## 20.12 SCREENBOXES system variable

### 20.12.1 Screen menu boxes

Contains the number of boxes displayed in the screen menu. If the screen menu is turned off the value is zero.

Read-only

Type:	Short
Saved in:	Not saved

## 20.13 SCREENMODE system variable

### 20.13.1 Screen mode

Stores the graphic/text state of the program display.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 3



Possible values:	0: Text screen is displayed 1: Drawing area is displayed 2: Dual-screen display is configured
------------------	---

## 20.14 SCREENSIZE system variable

### 20.14.1 Screen size

Shows the size of the current viewport in pixels (width x height).

Read-only

Type:	2D point
Saved in:	Not saved

## 20.15 SCRLHIST system variable

### 20.15.1 Scroll history

Specifies the number of Command lines to track in the Command line.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 or greater
Default value:	256

## 20.16 SDI system variable

### 20.16.1 Single-document interface (Windows)

Specifies whether a drawing is opened in a new BricsCAD instance or an existing instance. Partially implemented: SDI variable controls double-click behavior for drawings but it is still possible to open multiple documents in each BricsCAD instance. SDI setting 2 and 3 are Not saved. If SDI is set to 3, the program switches it back to 1 when the application that doesn't support multiple drawings is unloaded.

Type:	Short
Saved in:	Registry



Range:	0 to 3
Default value:	0
Possible values:	0: Multiple-drawing interface 1: Single-drawing interface 2: (Read-only) Multiple-drawing interface is disabled because an application has been loaded that does not support multiple drawings 3: (Read-only) Multiple-drawing interface is disabled because the user has set SDI to 1 and the program has loaded an application that does not support multiple drawings. (SDI was set to 1 before the application was loaded)

## 20.17 SECURELOAD system variable

### 20.17.1 Executable file security policy

Specifies security policy for loading executable files.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 2
Default value:	0
Possible values:	0: No security policy 1: Warn if loading from untrusted location 2: Load only from trusted locations

## 20.18 SECTIONSETTINGSSEARCHPATH system variable

### 20.19 SELECTIONANNODISPLAY system variable

#### 20.19.1 Show all annotation scales on selection

Specifies if all scale representations for selected annotative entities are displayed.

Type:	Boolean
Saved in:	Registry



Default value:	On
Possible values:	Off (0): Disable annotation scales display On (1): Enable annotation scales display

## 20.20 SELECTIONAREA system variable

### 20.20.1 Selection area

Specifies the display of selection area effects.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't show selection area effects On (1): Show selection area effects

## 20.21 SELECTIONAREAOPACITY system variable

### 20.21.1 Selection area opacity

Specifies the transparency of the selection area (lower value = more transparent). This is only in effect when SELECTIONAREA setting is On.

Type:	Short
Saved in:	Registry
Range:	0 to 100
Default value:	25

## 20.22 SELECTIONMODES system variable

### 20.22.1 Selection modes

Specifies which subentities or detected boundaries, should be highlighted in selection preview. The value is stored as a bitcode using the sum of the values of all selected options. While in selection preview, you can use the TAB key to cycle through the included subentity types and detected boundaries.

BricsCAD only



Type:	Short
Saved in:	Workspace
Range:	0 to 15
Default value:	0
Possible options:	1: Select edges 2: Select faces 4: Select detected boundaries 8: Select vertices

## 20.23 SELECTIONPREVIEW system variable

### 20.23.1 Selection preview display

Specifies in which cases entities are highlighted when the pickbox cursor hovers over them: when no commands are active or when a command prompts for entity selection. The value is stored as a bitcode using the sum of the values of all selected options.

When QUADDISPLAY is on, the value of the SELECTIONPREVIEW option 'When no commands are active' will be overruled, and treated as 'ON'.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	3
Possible options:	1: When no commands are active 2: When a command prompts for entity selection

## 20.24 SELECTSIMILARMODE system variable

### 20.24.1 Match options for SELECTSIMILAR

Specifies which properties must match for an entity of the same type to be selected with SELECTSIMILAR. For this command to operate as intended, at least one property must be turned on. When all properties are turned off, this command selects only the entity(ies) you pick at the 'Select entities' prompt. The value is stored as a bitcode using the sum of the values of all selected options.



Type:	Short
Saved in:	Registry
Range:	0 to 255
Default value:	130
Possible options:	0: Object type 1: Color 2: Layer 4: Linetype 8: Linetype scale 16: Lineweight 32: Plot style 64: Object style 128: Name

## 20.25 SETBYLAYERMODE system variable

### 20.25.1 Options for SETBYLAYERMODE

Specifies which layer properties would be applied by SETBYLAYER command.

Type:	Short
Saved in:	Registry
Range:	0 to 255
Default value:	255
Possible values:	0: None 1: Color 2: Linetype 4: Lineweight 8: Material 16: Plot style 32: ByBlock 64: Blocks 128: Transparency



## 20.26 SHADEDGE system variable

### 20.26.1 Shading edges

Specifies how faces and edges display in rendered views.

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	3
Possible values:	0: Faces shaded, edges not highlighted 1: Faces shaded, edges drawn in background color 2: Faces not filled, edges in entity color 3: Faces in entity color, edges in background color

## 20.27 SHADEDIF system variable

### 20.27.1 Shading diffusion

Specifies the ratio of diffuse reflective light to ambient light as a percentage of diffuse reflective light when SHADEDGE is set to 0 or 1.

Type:	Short
Saved in:	Drawing
Range:	0 to 100
Default value:	70

## 20.28 SHEETNUMBERLEADINGZEROES system variable

### 20.28.1 Sheet number leading zeroes

Specifies how to format the 'Number' value of new sheets.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	1 to 8
Default value:	1
Possible values:	1: 1 (1, 2, 3, ...) 2: 2 (01, 02, 03, ...) 3: 3 (001, 002, 003, ...) 4: 4 (0001, 0002, 0003, ...) 5: 5 (00001, 00002, 00003, ...) 6: 6 (000001, 000002, 000003, ...) 7: 7 (0000001, 0000002, 0000003, ...) 8: 8 (00000001, 00000002, 00000003, ...)

## 20.29 SHEETSETAUTOBACKUP system variable

### 20.29.1 Sheet set automatic backup

Specifies whether a backup file is created whenever a sheet set file is opened. The backup files have the same name as the sheet set file but with a '\*.ds\$' extension.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't create backup files On (1): Create backup files

## 20.30 SHEETSETTEMPLATEPATH system variable

### 20.30.1 Sheet Set template path

Specifies the path to the Sheet Set Templates folder. The default path is: \Users\<user name>\AppData\Local\ Bricsys\BricsCAD\Vxx\en\_US\Templates\Sheet Sets

Type:	String Standard
Saved in:	Preference



## 20.31 SHORTCUTMENU system variable

### 20.31.1 Shortcut menus

Specifies the status of the DEFAULT, EDIT and COMMAND shortcut menus. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 31
Default value:	19
Possible options:	<ul style="list-style-type: none"><li>0: Disable all Default, Edit, and Command mode shortcut menus</li><li>1: Enable Default mode shortcut menus</li><li>2: Enable Edit mode shortcut menus</li><li>4: Enable Command mode shortcut menus (available whenever a command is active)</li><li>8: Enable Command mode shortcut menus only when command options are currently available from the Command line</li><li>16: Enable display of a shortcut menu when the right button on the pointing device is held down longer</li></ul>

## 20.32 SHORTCUTMENUDURATION system variable

### 20.32.1 Shortcut menu duration

Specifies how long the right button on a pointing device must be pressed to display a shortcut menu.

Type:	Long
Saved in:	Registry
Range:	100 to 10000
Default value:	250

## 20.33 SHOWDOCTABS system variable

### 20.33.1 Tabs visibility

Toggles showing of the document tabs On/Off. You can make the drawing area larger by hiding the document tabs from the user interface.



BricsCAD only

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't make tabs visible On (1): Make tabs visible

## 20.34 SHOWFULLPATHINTITLE system variable

### 20.34.1 Display full path in title

Specifies whether the title bar displays the full path of a drawing, or only the file name.

Type:	Boolean
Saved in:	Preference
Default value:	Off

## 20.35 SHOWLAYERUSAGE system variable

### 20.35.1 Layer Usage

Shows information about layer usage in the layer presentation panel. In the column **Current**, the **Layer Usage** icons indicate when viewport settings for the current layout and paper space viewport are different from model space settings:

: Current layer with viewport overrides.

: Layer with viewport overrides.

: Empty layer with viewport overrides.

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): Do not display Layer Usage On (1): Display Layer Usage



## 20.36 SHOWSCROLLBUTTONS system variable

### 20.36.1 Scroll buttons

With this style, left and right scroll buttons are displayed On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't show scroll buttons On (1): Show scroll buttons

## 20.37 SHOWTABCLOSEBUTTON system variable

### 20.37.1 Close button on tabs

Toggles showing of close button on the tab bars On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't show close button on tabs On (1): Show close button on tabs

## 20.38 SHOWTABCLOSEBUTTONACTIVE system variable

### 20.38.1 Close button on active tab

Toggles showing of close button on the active tab only On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off



Possible values:	Off (0): Don't show close button on the active tab only On (1): Show close button on the active tab only
------------------	---

## 20.39 SHOWTABCLOSEBUTTONALL system variable

### 20.39.1 Close button on all tabs

Toggles showing of close button on all tabs On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't show close button on all tabs On (1): Show close button on all tabs

## 20.40 SHOWWINDOWLISTBUTTON system variable

### 20.40.1 Window list button

With this style, a drop-down list of windows is available On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Don't show window list button On (1): Show window list button

## 20.41 SHPNAME system variable

### 20.41.1 Shape name

Stores a default shape name according to naming conventions. Type a period (.) to set no default. Shapes are an early version of blocks that were efficient, but difficult to code. Shapes are rarely used anymore.

Type:	String
-------	--------



Saved in:	Not saved
Default value:	

## 20.42 SINGLETONMODE system variable

### 20.42.1 Singleton mode

Switch to control whether one or more instances of BricsCAD can run simultaneously. When set to Off, only a single instance of BricsCAD can run. When set to On, you can launch two or more copies of BricsCAD at the same time.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Singleton mode off On (1): Singleton mode on

## 20.43 SKETCHINC system variable

### 20.43.1 Sketch increment

Stores the record increment for the SKETCH command.

Type:	Real
Saved in:	Drawing
Default value:	1.0

## 20.44 SKPOLY system variable


### 20.44.1 Sketch poly

Specifies the entity type (lines or polylines) created by the SKETCH command.

Type:	Boolean
Saved in:	Drawing



Default value:	0
Possible values:	Off (0): Generate lines On (1): Generate polylines

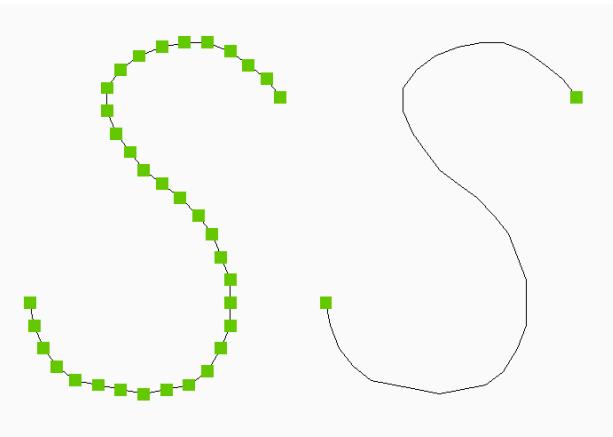

## 20.45 SKYSTATUS system variable

### 20.45.1 Sky status

Specifies whether sky illumination is computed at render time. (Not yet supported)

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: No sky 1: Sky background 2: Sky background and illumination

## 20.46 SLABTHICKNESS system variable

### 20.46.1 Default slab thickness

Default thickness of floor slabs, when using BIMQUICKDRAW.

BricsCAD only

Type:	Real
-------	------



Saved in:	Drawing
Default value:	250 mm / 10"

## 20.47 SMASSEMBLYEXPORTMODE system variable

### 20.47.1 Modification of exported assemblies

Specifies whether the original assembly is modified after running the SMASSEMBLYEXPORT command.

BricsCAD only

Type:	Short
Saved in:	Registry
Possible values:	0: Do not change external components 1: Keep recognized features on sheet metal/poor sheet metal parts

## 20.48 SMASSEMBLYEXPORTREPORTPATHTYPE system variable

### 20.48.1 Report file path type

Determines whether absolute or relative path to files will be used in the reports generated by the command.

BricsCAD only

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	0: Relative paths 1: Absolute paths



## 20.49 SMASSEMBLYEXPORTSOLIDTYPESINREPORTS system variable

### 20.49.1 Solid types in reports

Determines which types of solids will be present in command reports. Each solid belongs to one of four types: sheet metal, poor sheet metal, non sheet metal or standard part component solid. Sheet metal and poor sheet metal solids are always present in the reports.

BricsCAD only

Type:	Short
Saved in:	Drawing
Range:	0 to 3
Default value:	0
Possible values:	1: Non sheet metal solids 2: Standard part component solids

## 20.50 SMATTRIBUTESLAYERCOLOR system variable

### 20.50.1 Color of the attributes layer

Defines a color which will be assigned to layer containing attributes after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	7

## 20.51 SMATTRIBUTESLAYERTEXTHEIGHT system variable

### 20.51.1 Height of the text

Height of the text from Attributes Layer.

BricsCAD only

Type:	Real
-------	------



Saved in:	Registry
Default value:	0.01

## 20.52 SMATTRIBUTESLAYERTEXTHEIGHTTYPE system variable

### 20.52.1 Type of the text height

Determines type of the text height: bounding box ratio or absolute value.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Bounding box ratio 1: Absolute value

## 20.53 SMBENDANNOTATIONSLAYERCOLOR system variable

### 20.53.1 Color of the bend annotations text layer

Defines a color which will be assigned to layer containing bend annotations after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	5

## 20.54 SMBENDANNOTATIONSLAYERTEXTHEIGHT system variable

### 20.54.1 Height of the text

Height of the text from Bend Annotation Text Layer.



BricsCAD only

Type:	Real
Saved in:	Registry
Default value:	0.01

## 20.55 SMBENDANNOTATIONSAYERTEXTHEIGHTTYPE system variable

### 20.55.1 Type of the text height

Determines type of the text height: bounding box ratio or absolute value.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	0
Possible values:	0: Bounding box ratio 1: Absolute value

## 20.56 SMBENDLINESUPLAYERCOLOR system variable

### 20.56.1 Color of the bend up lines layer

Defines a color which will be assigned to layer containing bend up lines after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	1



## 20.57 SMBENDLINESUPPLAYERLINETYPE system variable

### 20.57.1 Linetype of the bend up lines layer

Determines the linetype of the bend up lines layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

## 20.58 SMBENDLINESUPPLAYERLINEWEIGHT system variable

### 20.58.1 Lineweight of the bend up layer

Determines the linewidth of the bend up layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-3 to 211
Default value:	-3

## 20.59 SMBENDLINESDOWNLAYERCOLOR system variable

### 20.59.1 Color of the bend down lines layer

Defines a color which will be assigned to layer containing bend down lines after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255



Default value:	1
----------------	---

## 20.60 SMBENDLINESDOWNLAYERLINETYPE system variable

### 20.60.1 Linetype of the bend down lines layer

Determines the linetype of the bend down lines layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

## 20.61 SMBENDLINESDOWNLAYERLINEWEIGHT system variable

### 20.61.1 Lineweight of the bend down layer

Determines the linewidth of the bend down layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-3 to 211
Default value:	-3

## 20.62 SMCOLORBEND system variable

### 20.62.1 Bend relief feature color

Visual color of entities related to bend reliefs.

BricsCAD only

Type:	String
Saved in:	Registry



Default value:	#FFDC50
----------------	---------

## 20.63 SMCOLORBENDRELIEF system variable

### 20.63.1 Bend relief feature color

Visual color of entities related to bend reliefs.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	#64D296

## 20.64 SMCOLORBEVEL system variable

### 20.64.1 Bevel feature color

Visual color of entities related to bevels.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	#64D296

## 20.65 SMCOLORCORNERRELIEF system variable

### 20.65.1 Corner relief feature color

Visual color of entities related to corner reliefs.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	#64D296



## 20.66 SMCONTOURSLAYERLINETYPE system variable

### 20.66.1 Linetype of the contour layer

Determines the linetype of the contour layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

## 20.67 SMCONTOURSLAYERLINEWEIGHT system variable

### 20.67.1 Lineweight of the contour layer

Determines the linewidth of the Contour layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-3 to 211
Default value:	30

## 20.68 SMCONTOURSLAYERCOLOR system variable

### 20.68.1 Color of the contour layer

Defines a color which will be assigned to layer in 2D dxf containing unfolded geometry after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255



Default value:	7
----------------	---

## 20.69 SMCONVERTMAXIMALBEVELANGLE system variable

### 20.69.1 Maximal angle of bevel

Determines maximal angle of bevel.

BricsCAD only

Type:	Real
Saved in:	Drawing
Range:	0 to 90
Default value:	80

## 20.70 SMCONVERTMINIMALBEVELANGLE system variable

### 20.70.1 Minimal angle of bevel

Determines minimal angle of bevel.

BricsCAD only

Type:	Real
Saved in:	Drawing
Range:	0 to 90
Default value:	1

## 20.71 SMCONVERTPREFERFORMFEATURES system variable

### 20.71.1 Prefer form features to flanges and bends

Controls which set of features has to be recognized on solid faces if they can be described by single form feature or set of flanges and bends (i.e. bridge-like insert on large flange).

BricsCAD only

Type:	Boolean
-------	---------



Saved in:	Drawing
Default value:	Off
Possible values:	0: Off 1: On

## 20.72 SMCONVERTPREFERHEMFEATURES system variable

### 20.72.1 Prefer hem features to flanges and bends

Controls which set of features has to be recognized on solid faces if they can be described by single hem feature or by bend and flange.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	0: Off 1: On

## 20.73 SMCONVERTPREFERZEROBENDFEATURES system variable

### 20.73.1 Prefer zero bend features to wrong bends

Controls which set of features has to be recognized on solid faces if they can be described by zero bend feature or by wrong bend feature.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	0: Off 1: On



## 20.74 SMCONVERTRECOGNIZEHOLES system variable

### 20.74.1 Recognize holes

If turned on, holes on the flanges will be recognized as features.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	0: Off 1: On

## 20.75 SMCONVERTRECOGNIZERIBCONTROLCURVES system variable

### 20.75.1 Recognize rib control curves

Controls recognition of 2D control curves for rib features.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	0: Off 1: On

## 20.76 SMCONVERTWRONGFEATURETHICKNESSDEVIATIONTYPE system variable

### 20.76.1 Type of deviation of wrong feature thickness

Determines whether deviation value is treated as ratio to model thickness or absolute value.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	0



Possible values:	0: Thickness ratio 1: Absolute value
------------------	---

## 20.77 SMCONVERTWRONGFEATURETHICKNESSDEVIATIONVALUE system variable

### 20.77.1 Deviation value of wrong feature thickness

Determines allowed deviation between model thickness of given wrong feature.

BricsCAD only

Type:	Real
Saved in:	Drawing
Range:	0 to 1e6
Default value:	0.2

## 20.78 SMDEFAULTKFACTOR system variable

### 20.78.1 K-Factor value

Sets location ratio of the neutral surface, for example surface not stretched or squeezed when the sheet is bent, to the material thickness. Value ranges from 0 for internal bend radius to 1 for the external bend radius. Value will be used to initialize sheet metal settings in the document.

BricsCAD only

Type:	Real
Saved in:	Drawing
Range:	0 to 1
Default value:	0.27324

## 20.79 SMDEFAULTHMRRELATIVEBENDDEDUCTION system variable

### 20.79.1 Hem relative bend deduction value

Sets relative to thickness bend deduction value used for closed hem unfolding. Value ranges from 0 which leads to hem lengthening to 10 which means shortening bend zone by a value equal to 8 \* thickness. Value will be used to initialize sheet metal settings in the document.

BricsCAD only



Type:	Real
Saved in:	Drawing
Range:	0 to 10
Default value:	2.4

## 20.80 SMDEFAULTFORMFEATUREUNFOLDMODE system variable

### 20.80.1 Form feature unfolding mode

Determines appearance of form features in unfolded part. Value will be used to initialize sheet metal settings in the document.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	4
Possible values:	0: Keep 1: Remove 2: Project 3: Contour 4: Symbol

## 20.81 SMDEFAULTBENDLINEEXTENTTYPE system variable

### 20.81.1 Bend line extent type

Determines if bend line extent is thickness ratio or absolute value. Value will be used to initialize sheet metal settings in the document.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	0



Possible values:	1: Thickness ratio 2: Absolute value
------------------	---

## 20.82 SMDEFAULTBENDLINEEXTENTVALUE system variable

### 20.82.1 Bend line extent value

Controls how much bend lines stretch out of contour (if the value is positive), do not reach it (if the value is negative), or just touch it (if the value is zero). Value will be used to initialize sheet metal settings in the document.

BricsCAD only

Type:	Real
Saved in:	Drawing
Range:	-1000000 to 1000000
Default value:	0.25

## 20.83 SMDEFAULTBEVELFEATUREUNFOLDMODE system variable

### 20.83.1 Bevel unfolding mode

Determines appearance of bevels in unfolded part. Value will be used to initialize sheet metal settings in the document.

BricsCAD only

Type:	Short
Saved in:	Drawing
Default value:	2
Possible values:	0: Keep 1: Remove 2: Annotate

**20.84 SMEXPORTOSMAPPROXIMATIONACCURACY system variable****20.85 SMEXPORTOSMMINIMALEDGELENGTH system variable****20.86 SMFORMFEATURESUPCOLOR system variable****20.86.1 Color of the form features up layer**

Defines a color which will be assigned to layer containing form features after SmUnfold and SmExport2d.  
BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	6

**20.87 SMFORMFEATURESPLAYERLINETYPE system variable****20.87.1 Linetype of the form features up layer**

Determines the linetype of the form feature layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

**20.88 SMFORMFEATURESDOWNCOLOR system variable****20.88.1 Color of the form features down layer**

Defines a color which will be assigned to layer containing form features after SmUnfold and SmExport2d.  
BricsCAD only

Type:	Short
Saved in:	Registry
Range:	1 to 255



Default value:	6
----------------	---

## 20.89 SMFORMFEATURESUPPLAYERLINEWEIGHT system variable

### 20.89.1 Lineweight of the form features up layer

Determines the linewidth of form feature layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-3 to 211
Default value:	-3

## 20.90 SMFORMFEATURESDOWNLAYERLINETYPE system variable

### 20.90.1 Linetype of the form features down layer

Determines the linetype of the form feature layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

## 20.91 SMFORMFEATURESDOWNLAYERLINEWEIGHT system variable

### 20.91.1 Lineweight of the form features down layer

Determines the linewidth of form feature layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry



Range:	-3 to 211
Default value:	-3

## 20.92 SMJUNCTIONCREATEHEALCOINCIDENT system variable

### 20.92.1 Heal coincident junction faces

Controls recognition of junction design with coincident faces and its conversion to regular junctions  
BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off

## 20.93 SMOOTHMESHCONVERT system variable

### 20.93.1 Mesh conversion mode

Specifies mesh to 3d solid or surface conversion mode, used by commands CONVTOSOLID or CONVTOSURFACE. Currently we support conversion only to faceted models, so values 0 and 1, corresponding to conversion to smooth models, are not accessible.

Type:	Short
Saved in:	Not saved
Range:	2 to 3
Default value:	2
Possible values:	2: Conversion result is faceted and optimized 3: Conversion result is faceted and not optimized

## 20.94 SMPARAMETRIZEHOLES PARAMETRIZATION system variable

### 20.94.1 Hole parametrization

Controls parametrization for straight holes. If **Convert holes to array** is on, holes on flanges will be checked to be grouped into parametric rectangular array. If **Parametrize holes** is on, holes which are not included to arrays will be constrained.



BricsCAD only

Type:	Short
Saved in:	Drawing
	0 to 3
Default value:	3
Possible values:	0: Does not parametrize holes 1: Parametrize holes 2: Convert holes to array

## 20.95 SMREPAIRLOFTEDBENDMERGE system variable

### 20.95.1 Merge lofted bends

If turned on, adjacent lofted bends with tangential connection will be merged to single lofted bend.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off

## 20.96 SMSMARTFEATURES system variable

### 20.96.1 Automatically update sheet metal features

Controls whether sheet metal features are rebuilt automatically when sheet metal commands have been executed. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 7
Default value:	3



Possible options:	1: Allow rebuilding sheet metal features 2: Allow automatic edges imprint after rebuild 4: Allow automatic creation of junctions after creating bends
-------------------	---

## 20.97 SMSPLITAMBIGUOUSINPUT system variable

### 20.97.1 Ambiguous input behavior

Controls command behavior to resolve situations when command can't univocally deduce face or entity to which input point or 2D curve relates to.

BricsCAD only

Type:	Short
Saved in:	Drawing
	0 to 1
Default value:	0
Possible values:	0: Prompt user 1: Command fail

## 20.98 SMSPLITCONVERTBENDTOJUNCTION system variable

### 20.98.1 Convert bend to junction

If enabled, split turns corner residue bend after split to junction.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	On

## 20.99 SMSPLITHEALCOINCIDENT system variable

### 20.99.1 Heal coincident miter faces

Controls appearance of coincident miter faces healing option in command prompt.

BricsCAD only



Type:	Boolean
Saved in:	Drawing
Default value:	Off

## 20.100 SMSPLITORTHOGONALBENDSPLIT system variable

### 20.100.1 Orthogonal bend split

Determines split behavior when split curve touches bend. If enabled, split direction for bend will be orthogonal to bend axis. If disabled, split direction will be tangential to split curve.

BricsCAD only

Type:	Boolean
Saved in:	Drawing
Default value:	Off

## 20.101 SMTARGETCAM system variable

### 20.101.1 Target CAM

Defines a target CAM system for processing sheet metal parts unfolded with BricsCAD using SmUnfold command.

BricsCAD only

Type:	String
Saved in:	Registry

## 20.102 SMOVERALLANNOTATIONSLAYERCOLOR system variable

### 20.102.1 Color of the overall dimensions annotations layer

Defines a color which will be assigned to layer containing overall dimensions annotations after SmUnfold and SmExport2d.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Registry
Range:	1 to 255
Default value:	3

## 20.103 SMOVERALLANNOTATIONSAYERLINETYPE system variable

### 20.103.1 Linetype of the overall annotation layer

Determines the linetype of the overall annotation layer entities.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	CONTINUOUS

## 20.104 SMOVERALLANNOTATIONSAYERLINEWEIGHT system variable

### 20.104.1 Lineweight of the overall annotation layer

Determines the linewidth of bend annotation layer. Values between -3 and 211 are accepted. -1=ByLayer, -2=ByBlock, -3=Default

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-3 to 211
Default value:	-3

## 20.105 SMBEVELFEATURECOLOR system variable

### 20.105.1 Color of the bevel features layer

Defines a color which will be assigned to layer containing bevel features after SmUnfold and SmExport2d.

BricsCAD only



Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	6

## 20.106 SNAPANG system variable

### 20.106.1 Snap angle

Specifies the rotation of snap, grid and crosshairs for the current viewport relative to the current UCS.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 20.107 SNAPBASE system variable

### 20.107.1 Snap base

Specifies the origin point of snap and grid in the current viewport relative to the current UCS.

Type:	2D point
Saved in:	Drawing
Default value:	0,0

## 20.108 SNAPCOLOR system variable

### 20.108.1 Snap color (Obsolete)

Replaced by SNAPMARKERCOLOR.

BricsCAD only

Type:	Short
Saved in:	Registry




## 20.109 SNAPISOPAIR system variable

### 20.109.1 Snap isometric pair

Specifies the current viewport's isometric plane (left, top or right), used if SNAPSTYL is isometric. Press **F5** function key to set the appropriate drawing plane: **Left**, **Top** or **Right**.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	0
Possible values:	0: Left 1: Top 2: Right

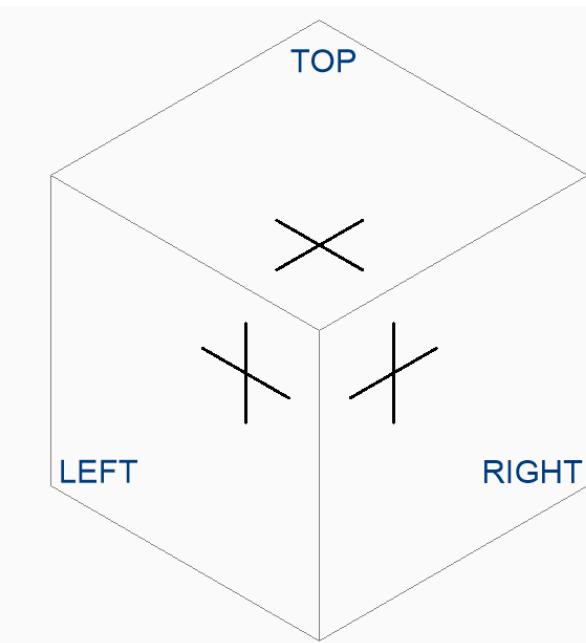

## 20.110 SNAPMARKERCOLOR system variable

### 20.110.1 Snap marker color

Specifies the color of the snap marker. Values between 1 and 255 are accepted.

BricsCAD only



Type:	Short
Saved in:	Preference
Range:	1 to 255
Default value:	20

## 20.111 SNAPMARKERSIZE system variable

### 20.111.1 Snap marker size

Specifies the size of the snap marker.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	6

## 20.112 SNAPMARKERTHICKNESS system variable

### 20.112.1 Snap marker thickness

Specifies the thickness of the snap marker.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	2

## 20.113 SNAPMODE system variable

### 20.113.1 Snap mode

Toggles snap On or Off for the current viewport. This setting is overridden when SNAPTYPE is set to **Adaptive Grid Snap**.

Type:	Boolean
-------	---------



Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Snap off (for current viewport) On (1): Snap on (for current viewport)

## 20.114 SNAPSIZE system variable

### 20.114.1 Snap size (Obsolete)

Replaced by SNAPMARKERSIZE.

BricsCAD only

Type:	Short
Saved in:	Registry

## 20.115 SNAPSTYL system variable

### 20.115.1 Snap style

Specifies whether the snap style for the current viewport is rectangular or isometric.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	0: Rectangular snap 1: Isometric snap

## 20.116 SNAPTHICKNESS system variable

### 20.116.1 Snap thickness (Obsolete)

Replaced by SNAPMARKERTHICKNESS.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Registry
-----------	----------

## 20.117 SNAPTYPE system variable

### 20.117.1 Snap type

Specifies the snap type for the current viewport: grid snap, polar snap or adaptive grid snap.

During **Adaptive Grid Snap**, the snap spacing is calculated depending on the ratio of the current drawing units per displayed pixel and the AdaptiveGridStepSize setting. This option overrides SNAPMODE.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Grid snap 1: Polar snap 2: Adaptive Grid Snap

## 20.118 SNAPUNIT system variable

### 20.118.1 Snap unit

Specifies the current viewport's snap spacing and specifies the spacing between snap points. If SNAPSTYL is 1 (isometric snap), the SNAPUNIT X value will adjust itself automatically to reflect the isometric snap. There is no snap in the Z direction.

Type:	2D point
Saved in:	Drawing
Default value:	0.5,0.5

## 20.119 SOLIDCHECK system variable

### 20.119.1 Solid check

Toggles the 3D solid validation for the current BricsCAD session.

Type:	Boolean
-------	---------



Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Solid validation off On (1): Solid validation on

## 20.120 SORTENTS system variable

### 20.120.1 Sort entities

Specifies the entity display sort order. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Range:	0 to 127
Default value:	127
Possible options:	0: Off 1: Entity selection 2: Entity snap 4: Redraws 8: Mslide slide creation 16: Regens 32: Plotting 64: PostScript output

## 20.121 SPAADJUSTMODE system variable

### 20.121.1 Adjust mode

The adjustment mode is used for triangle smoothing. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Short
Saved in:	Preference



Range:	0 to 2
Default value:	0
Possible values:	0: None (Leave everything alone) 1: Non grid (Adjust points surrounded by triangles by moving nodes in the center of surrounding nodes) 2: All (Also adjusts grid nodes)

## 20.122 SPACHECKLEVEL system variable

### 20.122.1 Check level

Check level used in AUDIT and SOLIDEDIT for checking ACIS entities. Value 10 is the lowest, used for fast checking. Value 70 is the maximum, used for comprehensive time consuming check. Audit is used to repair drawings that are open. SolidEdit edits the faces, edges and bodies of 3D solids and 2D regions. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 70
Default value:	10
Possible values:	0: Basic transformation consistency, basic pointer and fatal topology checks. 10: Basic geometry checks. Cellular topology checks. 20: Data sharing checks. Face area and loop orientation check. Medium checks of curve geometry. 30: General surface checks. Check for sliver faces. 40: Degenerate spline surface check. Compatibility check between surface and pcurve's surface. Check that COEDGE has a partner on a single-sided face. 50: Body containment checks. Compatibility check between pcurve location and (non-tolerant) coedge location. 60: Convexity points check. 70: Lump and shell containment checks. Face-face intersection checks. Curve parametrization check.



## 20.123 SPAGRIDASPECTRATIO system variable

### 20.123.1 Grid aspect ratio

Grid aspect ratio specifies the approximate aspect ratio of each cell in the grid. If the value is close to 1, then the cell is close to a square. This does not guarantee the aspect ratio of the facet, which may consist of only a part of a cell. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.124 SPAGRIDMODE system variable

### 20.124.1 Grid mode

Specifies how grids are used in the mesh process. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 3
Default value:	1
Possible values:	0: No grids at all 1: Grids in interior 2: Allow grid to divide model edges 3: Grid only in one direction, u or v

## 20.125 SPAMAXFACETEDGELENGTH system variable

### 20.125.1 Maximum facet edge length

Specifies the maximum length of a facet side. The recommended, and default, value of 0 allows the software to determine and use an optimal value. Specifying a length that is too small can lead to high memory consumption and poor performance. This variable is ignored if SPAUSEFACETRES is used.



BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

### 20.126 SPAMAXNUMGRIDLINES system variable

#### 20.126.1 Maximum number of grid lines

The maximum grid lines specifies the maximum number of grid subdivisions. This prevents the facet data of a face from getting too big. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Long
Saved in:	Preference
Default value:	512

### 20.127 SPAMINUGRIDLINES system variable

#### 20.127.1 Minimum number of U grid lines

Specifies the minimum number of U grid lines. At least this number of grid lines are generated in U direction. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Long
Saved in:	Preference
Default value:	0

### 20.128 SPAMINVGRIDLINES system variable

#### 20.128.1 Minimum number of V grid lines

Specifies the minimum number of V grid lines. At least this number of grid lines are generated in V direction. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.



BricsCAD only

Type:	Long
Saved in:	Preference
Default value:	0

## 20.129 SPANORMALTOL system variable

### 20.129.1 Normal tolerance

The normal tolerance specifies the maximum normal deviation allowed between two normals on two adjacent facet nodes in degrees. The proper value is usually independent of the model size. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	15.0

## 20.130 SPASURFACETOL system variable

### 20.130.1 Surface tolerance

The surface tolerance specifies the maximum distance between a facet edge and the true surface. The proper value is dependent on the model size. This variable is ignored for output to STL and PDF if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	-1.0



## 20.131 SPATRIANGMODE system variable

### 20.131.1 Triangulation mode

Triangulation mode identifies what portion of the mesh is to be triangulated. This variable is ignored if FACETRES is used. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 5
Default value:	1
Possible values:	0: No triangulation 1: Triangulate everywhere 2: Triangulate against the boundary 3: Also triangulate first grid level 4: Triangulate to 3 levels of fringe 5: Triangulate to 4 levels of fringe

## 20.132 SPAUSEFACETRES system variable

### 20.132.1 Use FACETRES system variable

Specifies whether the FACETRES system variable will be used instead of normal tolerance. Spa is short for Spatial, the maker of ACIS.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On

## 20.133 SPLFRAME system variable

### 20.133.1 Spline frame

Specifies whether the control frame for helixes.

Type:	Boolean
-------	---------



Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't display control frame for helixes. On (1): Display control frame for helixes.

## 20.134 SPLINESEGS system variable

### 20.134.1 Spline segments

Specifies how many line segments are to be generated for each spline-fit polyline (spline option of the PEDIT command). Values between -32768 and 32768 are accepted. With a negative value a fit-type curve is applied. A fit-type curve is composed of arc-segments, which yields a smoother curve, but it takes longer to generate.

Type:	Short
Saved in:	Drawing
Range:	-32768 to 32767
Default value:	8

## 20.135 SPLINETYPE system variable

### 20.135.1 Spline type

Specifies the curve type to be generated by the Spline option of the PEDIT command: Quadratic B-spline or Cubic B-spline.

Type:	Short
Saved in:	Drawing
Range:	5 to 6
Default value:	6
Possible values:	5: Quadratic B-spline 6: Cubic B-spline



## 20.136 SRCHPATH system variable

### 20.136.1 Support file search path

Specifies the folder(s) in which BricsCAD should look for text fonts, customization files, plug-ins, drawings to insert, linetypes, and hatch patterns that are not in the current folder. Search paths are separated by semicolons (:).

BricsCAD only

Type:	String
Saved in:	Registry

## 20.137 SSFOUND system variable

### 20.137.1 Sheet set found

Displays the sheet set file name and path that is associated with the current drawing file (if it is currently open).

Read-only

Type:	String
Saved in:	Not saved

## 20.138 SSLOCATE system variable

### 20.138.1 Sheet set locate

Specifies whether BricsCAD will try to locate and open a sheet set for the drawing that is being opened.

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't open a drawing's sheet set with the drawing On (1): Open a drawing's sheet set with the drawing
------------------	---

## 20.139 SSMAUTOOPEN system variable

### 20.139.1 Sheet set manager auto open

Specifies whether or not BricsCAD displays the Sheet Set Manager when a drawing is opened that is associated with a sheet set. SSMAUTOOPEN and SSLOCATE must both be switched on to display the sheet set automatically.

Type:	Boolean
Saved in:	Workspace
Default value:	On
Possible values:	Off (0): Don't open sheet set panel automatically On (1): Open sheet set panel automatically

## 20.140 SSMPOLTIME system variable

### 20.140.1 Sheet set manager poll time

Specifies the time interval between automatic refreshes of the status data in a sheet set.  
SSMSHEETSTATUS must be set to 2 for the timer to operate.

Type:	Short
Saved in:	Registry
Range:	10 to 600
Default value:	15

## 20.141 SSMSHEETSTATUS system variable

### 20.141.1 Sheet set manager status

Specifies how the status data in a sheet set is refreshed.

Type:	Short
-------	-------



Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Don't automatically refresh status 1: Refresh status when sheet set is loaded or updated 2: Refresh status when sheet set is loaded or updated, and at time interval by SSMPOLTIME

## 20.142 SSMSTATE system variable

### 20.142.1 Sheet set manager state

Specifies if the Sheet Set Manager is active or not.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0
Possible values:	0: Sheet Set Manager is not active 1: Sheet Set Manager is active

## 20.143 STACKPANELTYPE system variable

### 20.143.1 Stack panel type

Style of stacked docking panel containers.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	1
Default value:	0 to 2



Possible values:	0: Fixed resizable panelset with horizontal text tab buttons 1: Flyout panelset with an icon tab strip 2: Collapsible panelset with vertical icon tab buttons (unless docked at top or bottom)
------------------	--

## 20.144 STAMPFONTSIZE system variable

### 20.144.1 Font Size

Specifies the font size for the plot stamp.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.2

## 20.145 STAMPFONTSTYLE system variable

### 20.145.1 Font Style

Specifies the font style for the plot stamp.

BricsCAD only

Type:	String
Saved in:	Preference
Default value:	Arial

## 20.146 STAMPFOOTER system variable

### 20.146.1 Footer

Specifies the footer for the plot stamp.

BricsCAD only

Type:	String
Saved in:	Preference



## 20.147 STAMPFOOTEROFFSETX system variable

### 20.147.1 Stamp footer X offset

Specifies the offset of the plot stamp footer from the left of the printable area.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.148 STAMPFOOTEROFFSETY system variable

### 20.148.1 Stamp footer Y offset

Specifies the offset of the plot stamp footer from the bottom of the printable area.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.149 STAMPHEADER system variable

### 20.149.1 Header

Specifies the header for the plot stamp.

BricsCAD only

Type:	String
Saved in:	Preference

## 20.150 STAMPHEADEROFFSETX system variable

### 20.150.1 Stamp header X offset

Specifies the offset of the plot stamp header from the left of the printable area.

BricsCAD only



Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.151 STAMPHEADEROFFSETY system variable

### 20.151.1 Stamp header Y offset

Specifies the offset of the plot stamp header from the top of the printable area.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.152 STAMPUNITS system variable

### 20.152.1 Units

Specifies units in which the font size of the plot stamp is displayed.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 1
Default value:	0
Possible values:	0: Inches 1: Millimeters

## 20.153 STARTUP system variable

### 20.153.1 Startup

Specifies the display of the Create New Drawing and Startup dialog boxes.



Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	3
Possible values:	0: Display the Select Template dialog box, or use a default drawing template file (set in the BASEFILE system variable) 1: Display the Startup and the Create New Drawing dialog boxes 2: Display the Start page 3: Display the Start page (with ribbon preloaded)

## 20.154 STARTUPTODAY system variable

### 20.154.1 Startup today (Obsolete)

Specifies whether or not the Today window is used.

Type:	Boolean
Saved in:	Registry
Possible values:	Off (0): Display Traditional startup dialog box On (1): Display Today window

## 20.155 STATUSBAR system variable

### 20.155.1 Window status bar

Specifies the display of the status bar. The only reason to turn off the status bar is to gain a bit more drawing area. It is far more useful to leave it on.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't show status bar On (1): Show status bar



## 20.156 STEPSIZE system variable

### 20.156.1 Step size

Specifies the size of each step, in drawing units, in walk or fly mode.

Type:	Real
Saved in:	Drawing
Range:	1e-6 to 1e+6
Default value:	50.0

## 20.157 STEPSPERSEC system variable

### 20.157.1 Steps per second

Specifies the number of steps taken per second in walk or fly mode.

Type:	Real
Saved in:	Drawing
Range:	1.0 to 30.0
Default value:	24.0

## 20.158 STLPOSITIVEQUADRANT system variable

### 20.158.1 STL export coordinates adjustment

Move coordinates to all-positive octant.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	1
Possible values:	0: Off 1: On



## 20.159 STRUCTUREDISPLAYMODE system variable

### 20.159.1 Structure Display Mode

Specifies how items in Structure Tree are organized.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	0
Possible values:	0: By type 1: By entity

## 20.160 STRUCTURETREECONFIG system variable

### 20.160.1 Structure Tree Configuration

Name of the active Structure Tree configuration file. SRCHPATH is used for finding the file. Loading a different CST file than the default file changes the way that the STRUCTUREPANEL command presents drawing data.

BricsCAD only

Type:	String
Saved in:	Workspace
Default value:	"default.cst"

## 20.161 SURFTAB1 system variable

### 20.161.1 Surface tabulation 1

Specifies the number of tabulations to be created for RULESURF and TABSURF. Also defines the mesh density in the M direction for REVSURF and EDGESURF.

When extruding entities with arc segments: the SURFTAB1 system variable divides them in a number of equal length intervals.

When revolving entities: the SURFTAB1 variable controls the number of segments of the revolution surface.

Type:	Short
-------	-------



Saved in:	Drawing
Default value:	6

## 20.162 SURFTAB2 system variable

### 20.162.1 Surface tabulation 2

Specifies the mesh density in the N direction for REVsurf and EDGESURF. The SURFTAB2 variable controls the number of segments of each arc segment in the revolved entity.

Type:	Short
Saved in:	Drawing
Default value:	6

## 20.163 SURFTYPE system variable

### 20.163.1 Surface-fitting type

Specifies the surface-fitting type to be used when the Smooth option of the PEDIT command is executed.

Type:	Short
Saved in:	Drawing
Range:	5 to 8
Default value:	6
Possible values:	5: Quadratic B-spline surface 6: Cubic B-spline surface 8: Bezier surface

## 20.164 SURFU system variable

### 20.164.1 Surface U

Specifies the surface density in the M direction and the U isolines density on surface entities when the Smooth option of the PEDIT command is executed.

Type:	Short
-------	-------



Saved in:	Drawing
Default value:	6

## 20.165 SURFV system variable

### 20.165.1 Surface V

Specifies the surface density in the N direction and the V isolines density on surface entities when the Smooth option of the PEDIT command is executed.

Type:	Short
Saved in:	Drawing
Default value:	6

## 20.166 SVGBLENDDEDGRADIENTS system variable

### 20.166.1 Svg Blended Gradients

Use blended gradients for complex gradient fill. The use of complex gradient fills makes the file size larger.  
BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	Off
Possible values:	Off (0): Don't use blended gradients. On (1): Use blended gradients.

## 20.167 SVGDEFAULTIMAGEEXTENSION system variable

### 20.167.1 Svg Default Image Extension

Specifies the default extension for images.

BricsCAD only

Type:	String
Saved in:	Preference



Default value:	.png
----------------	------

## 20.168 SVGGENERICFONTFAMILY system variable

### 20.168.1 Svg Generic Font Family

Font to substitute if the correct one is missing.

The following generic font families are supported in SVG: **serif, sans-serif, cursive, fantasy, monospace**.

- Sans-serif - fonts without serifs, like Arial
- Serif - fonts with serifs, like Times Roman
- Cursive - fonts that look handwritten
- Fantasy - unusual fonts
- Monospace - fonts where each character takes up the same space (non-proportional spacing), such as Courier

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	0
Possible values:	0: sans-serif 1: serif 2: cursive 3: fantasy 4: monospace

## 20.169 SVGIMAGEBASE system variable

### 20.169.1 Svg Image base path

Path where to copy images (if not set, absolute file paths are written to svg).

BricsCAD only

Type:	String Standard
Saved in:	Preference



## 20.170 SVGIMAGEURL system variable

### 20.170.1 Svg Image Url

Prefix, to prepend to image name (eg: "http://www.mysite.com/images/", or "to/images/").

BricsCAD only

Type:	String Standard
Saved in:	Preference

## 20.171 SVGLINEWEIGHTSCALE system variable

### 20.171.1 Svg Line Weight Scale

Size of pixel in device units, used for scaling lineweights.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	1.0

## 20.172 SVGOUTPUTHEIGHT system variable

### 20.172.1 Svg Output Height (in pixels)

Output Height (in pixels).Valid only if SVGSCALEFACTOR is zero.

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	768

## 20.173 SVGOUTPUTWIDTH system variable

### 20.173.1 Svg Output Width (in pixels)

Output Width (in pixels).Valid only if SvgScaleFactor is zero.

BricsCAD only



Type:	Short
Saved in:	Preference
Default value:	1024

## 20.174 SVGPRECISION system variable

### 20.174.1 Svg Floating Point Precision

Specifies the precision in terms of decimal digits in doubles (as in printf("%.9g",...) - 9 digits ).

BricsCAD only

Type:	Short
Saved in:	Preference
Default value:	6

## 20.175 SVGSCALEFACTOR system variable

### 20.175.1 Svg Scale Factor

1 Drawing unit = X Svg pixels.

If set to zero, it will scale the current view to fit within the page size of SvgOutputWidth x SvgOutputHeight.

If set to a positive value, the SVG page size is calculated automatically to correspond to the required scale, when one drawing unit is equal to the specified number of SVG pixels.

E.g. 96dpi / 25.4 = 3.7795 - the corresponding scale factor for the conversion of 1 dwg unit into 1 mm Svg.

BricsCAD only

Type:	Real
Saved in:	Preference
Default value:	0.0

## 20.176 SYSCODEPAGE system variable

### 20.176.1 System code page

Displays the system code page, determined by the operating system.

Read-only



Type:	String
Saved in:	Not saved



## 21. T

### 21.1 TABCONTROLHEIGHT system variable

#### 21.1.1 Tab control height in pixels

Sets the height of the document tab control in pixels.

BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 or greater
Default value:	25

### 21.2 TABMODE system variable

#### 21.2.1 Tablet mode

Specifies the use of a tablet. Use the TABLET command for configuring a tablet.

Type:	Boolean
Saved in:	Not saved
Range:	Off
Possible values:	Off (0): Command selection mode On (1): Digitizing mode

### 21.3 TABSFIXEDWIDTH system variable

#### 21.3.1 Tabs fixed width (Mac & Linux)

With this style, all tabs have the same width On/Off.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off



Possible values:	Off (0): All tabs have fixed width off On (1): All tabs have fixed width on
------------------	--

## 21.4 TARGET system variable

### 21.4.1 Target

Specifies the current viewport's location of the target point.

Read-only

Type:	3D point
Saved in:	Drawing

## 21.5 TDCREATE system variable

### 21.5.1 Time/Date create

Shows the time and date the drawing was created (in Julian Day format).

Read-only

Type:	Real
Saved in:	Drawing

## 21.6 TDINDWG system variable

### 21.6.1 Time/Date in drawing

Shows the total editing time of the current drawing in days. Format: >number of days<. >decimal fraction of a day<

Read-only

Type:	Real
Saved in:	Drawing

## 21.7 TDUCREATE system variable

### 21.7.1 Time/Date universal create

Shows the universal time and date the drawing was created (in Julian Day format).

Read-only



Type:	Real
Saved in:	Drawing

## 21.8 TDUPDATE system variable

### 21.8.1 Time/Date update

Shows the local time and date the drawing was last saved or updated (in Julian Day format).

Read-only

Type:	Real
Saved in:	Drawing

## 21.9 TDUSRTIMER system variable

### 21.9.1 Time/Date user timer

Shows the user-elapsed timer. You can start, stop and reset the timer with the TIME command.

Read-only

Type:	Real
Saved in:	Drawing

## 21.10 TDUUPDATE system variable

### 21.10.1 Time/Date universal update

Shows the universal time and date the drawing was last saved or updated (in Julian Day format).

Read-only

Type:	Real
Saved in:	Drawing

## 21.11 TEMPLATEPATH system variable

### 21.11.1 Template path

Specifies the path to the Templates folder.

BricsCAD only



Type:	String Standard
Saved in:	Preference

## 21.12 TEMPPREFIX system variable

### 21.12.1 Temporary prefix

Contains the folder name for temporary files.

Type:	String Standard
Saved in:	Registry

## 21.13 TEXTANGLE system variable

### 21.13.1 Text angle

Stores the angle of the last added text entity.

BricsCAD only

Type:	Real
Saved in:	Not saved

## 21.14 TEXTED system variable

### 21.14.1 Text editor for single line text entities

Specifies the type of the editor to work with single line text entities.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: in-place editor 1: pop up dialog 2: in-place editor with repeated input



## 21.15 TEXTEDITMODE system variable

### 21.15.1 Text edit mode

Specifies whether text editing commands (DDEDIT) automatically repeat entity selection or not.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	0
Possible values:	0: Multiple edit mode (command repeats until canceled) 1: Single edit mode (command ends after editing one text entity) 2: Automatic edit mode (single if editing preselected text, multiple otherwise)

## 21.16 TEXTEVAL system variable

### 21.16.1 Text evaluation

Specifies the method of evaluation for the Command line text strings. When the TEXTEVAL system variable is set to 1, this command evaluates LISP expressions:

Text: (\* pi 2)

The result of the equation (pi x 2) is placed as text: 6.283185

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0
Possible values:	0: All responses to prompts for text strings and attribute values are taken literally 1: Text starting with '(' or ')' is evaluated as an lisp expression, as for nontextual input



## 21.17 TEXTFILL system variable

### 21.17.1 Text fill

Specifies whether TrueType fonts are either filled or outlined when exporting with the PSOUT command and in renderings.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Display text as outlines 1: Display text as filled images

**Filled Text** **Outlined Text** **Filled text**  
**Outlined text**

## 21.18 TEXTQLTY system variable

### 21.18.1 Text quality (Mac & Linux)

Specifies the smoothness of TrueType fonts for plotting and rendering.

Type:	Short
Saved in:	Not saved
Range:	0 to 100
Default value:	50
Possible values:	0: No effort to refine the smoothness of the text 100: Maximum effort to smooth text characters



## 21.19 TEXTSIZE system variable

### 21.19.1 Text size

Specifies the default height for new text entities. TEXTSIZE has no effect if the current text style has a fixed height.

Type:	Real
Saved in:	Drawing
Default value:	2.5

## 21.20 TEXTSTYLE system variable

### 21.20.1 Text style

Stores the name of the current text style.

Type:	String
Saved in:	Drawing
Default value:	Standard

## 21.21 TEXTUREMAPPATH system variable

### 21.21.1 Texture map path

Specifies the path(s) to the texture maps folder(s).

BricsCAD only

Type:	String
Saved in:	Preference

## 21.22 THICKNESS system variable

### 21.22.1 Thickness

Stores the current 3D thickness.

Type:	Real
-------	------



Saved in:	Drawing
Default value:	0.0

## 21.23 THUMBSIZE system variable

### 21.23.1 Thumbnail preview image size

Specifies the maximum generated size for thumbnail previews in pixels.

Type:	Short
Saved in:	Registry
Range:	0 to 8
Default value:	3
Possible values:	0: 64x64 1: 128x128 2: 256x256 3: 512x512 4: 1024x1024 5: 1440x1440 6: 1600x1600 7: 1920x1920 8: 2560x2560

## 21.24 TILEMODE system variable

### 21.24.1 Tile mode

Activates the Model tab or the most recently used layout tab.

Type:	Short
Saved in:	Drawing
Default value:	1
Possible values:	0: Activate last active layout tab (paper space) 1: Activate Model tab



## 21.25 TILEMODELIGHTSYNCH system variable

### 21.25.1 Tile mode light synch

Specifies the synchronization of lighting in all model space viewports. (Internal use only)

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Don't synchronize lighting On (1): Synchronize lighting

## 21.26 TIMEZONE system variable

### 21.26.1 Timezone

Specifies the time zone for the sun in the drawing. Setting a geographic location also sets the time zone.

Type:	Short
Saved in:	Drawing
Range:	-12000 to 13000
Default value:	-8000



Possible values:	-12000: (GMT-12:00) International Date Line West -11000: (GMT-11:00) Midway Island, Samoa -10000: (GMT-10:00) Hawaii -9000: (GMT-09:00) Alaska -8000: (GMT-08:00) Pacific Time (US & Canada); Tijuana -7000: (GMT-07:00) Mountain Time (US & Canada) -7001: (GMT-07:00) Arizona -7002: (GMT-07:00) Chihuahua, La Paz, Mazatlan -6000: (GMT-06:00) Central Time (US & Canada) -6001: (GMT-06:00) Central America -6002: (GMT-06:00) Guadalajara, Mexico City, Monterrey -6003: (GMT-06:00) Saskatchewan -5000: (GMT-05:00) Eastern Time (US & Canada) -5001: (GMT-05:00) Indiana (East) -5002: (GMT-05:00) Bogota, Lima, Quito -4000: (GMT-04:00) Atlantic Time (Canada) -4001: (GMT-04:00) Caracas, La Paz -4002: (GMT-04:00) Santiago -3300: (GMT-03:30) Newfoundland -3000: (GMT-03:00) Brasilia -3001: (GMT-03:00) Buenos Aires, Georgetown -3002: (GMT-03:00) Greenland -2000: (GMT-02:00) Mid-Atlantic -1000: (GMT-01:00) Azores -1001: (GMT-01:00) Cape Verde Is. 0: (UTC) Universal Coordinated Time 1: (GMT) Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London 2: (GMT) Casablanca, Monrovia 1000: (GMT+01:00) Amsterdam, Berlin, Bern, Rome, Stockholm, Vienna 1001: (GMT+01:00) Brussels, Copenhagen, Madrid, Paris 1002: (GMT+01:00) Belgrade, Bratislava, Budapest, Ljubljana, Prague 1003: (GMT+01:00) Sarajevo, Skopje, Warsaw, Zagreb 1004: (GMT+01:00) West Central Africa 2000: (GMT+02:00) Athens, Beirut, Istanbul, Minsk 2001: (GMT+02:00) Bucharest 2002: (GMT+02:00) Cairo 2003: (GMT+02:00) Harare, Pretoria 2004: (GMT+02:00) Helsinki, Kyiv, Riga, Sofia, Tallinn, Vilnius 2005: (GMT+02:00) Jerusalem 3000: (GMT+03:00) Moscow, St. Petersburg, Volgograd 3001: (GMT+03:00) Kuwait, Riyadh 3002: (GMT+03:00) Baghdad 3003: (GMT+03:00) Nairobi 3300: (GMT+03:30) Tehran 4000: (GMT+04:00) Abu Dhabi, Muscat 4001: (GMT+04:00) Baku, Tbilisi, Yerevan 4300: (GMT+04:30) Kabul 5000: (GMT+05:00) Ekaterinburg 5001: (GMT+05:00) Islamabad, Karachi, Tashkent 5300: (GMT+05:30) Chennai, Kolkata, Mumbai, New Delhi 5450: (GMT+05:45) Kathmandu 6000: (GMT+06:00) Almaty, Novosibirsk 6001: (GMT+06:00) Astana, Dhaka 6002: (GMT+06:00) Sri Jayawardenepura 6200: (GMT+06:30) Bangkok
------------------	---



## 21.27 TOOLBARMARGIN system variable

### 21.27.1 Toolbar margin

Margin, in pixels, separating rows of toolbar buttons.

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 63
Default value:	0

## 21.28 TOOLBUTTONSIZE system variable

### 21.28.1 Tool button size

Specifies the size of the toolbar buttons.



Figura 7: Small



Figura 8: Large



Figura 9: Extra Large

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 2
Default value:	0



Possible values:	0: Small buttons 1: Large buttons 2: Extra-large buttons
------------------	--

## 21.29 TOOLICONPADDING system variable

### 21.29.1 Tool icon padding

Size, in pixels, of blank space around toolbar icons

BricsCAD only

Type:	Short
Saved in:	Workspace
Range:	0 to 15
Default value:	0

## 21.30 TOOLPALETTEPATH system variable

### 21.30.1 Tool palettes path

Specify the path(s) to the Tool Palettes folder(s).

Type:	String
Saved in:	Registry

## 21.31 TOOLTIPDELAY system variable

### 21.31.1 Tooltip delay

Specifies the delay after which tooltips appear (in milliseconds).

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to
Default value:	500



## 21.32 TOOLTIPS system variable

### 21.32.1 Tooltips

Toggles the display of tooltips for toolbars, ribbon, quad and properties.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display tooltips On (1): Display tooltips

## 21.33 TPSTATE system variable

### 21.33.1 Tool Palettes bar state

Specifies whether the tool palettes bar is visible or not.

Read-only

Type:	Short
Saved in:	Not saved
Range:	0 to 1
Default value:	0
Possible values:	0: Tool Palettes bar is invisible 1: Tool Palettes bar is visible

## 21.34 TRACEWID system variable

### 21.34.1 Trace width

Specifies the default width for new traces.

Type:	Real
Saved in:	Drawing
Default value:	1.0



## 21.35 TRACKPATH system variable

### 21.35.1 Track path

Specifies the display of polar and entity snap tracking paths.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible values:	0: Display full-screen entity snap tracking path 1: Display entity snap tracking path only between the alignment point and the From point to the cursor location 2: Do not display polar tracking path 3: Do not display polar or entity snap tracking paths

## 21.36 TRANSPARENCYDISPLAY system variable

### 21.36.1 Transparency display

Specifies whether entity transparencies are displayed on-screen.

Type:	Boolean
Saved in:	Registry
Default value:	On

## 21.37 TRAYICONS system variable

### 21.37.1 Tray icons

Toggles the display of notification icons in the status bar.

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't display tray On (1): Display tray
------------------	---

## 21.38 TRAYNOTIFY system variable

### 21.38.1 Tray notify

Toggles the display of notification balloons for the running services in the status bar tray.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't display notifications On (1): Display notifications

## 21.39 TRAYTIMEOUT system variable

### 21.39.1 Tray timeout

Specifies the display time (in seconds) for service notifications.

Type:	Short
Saved in:	Registry
Range:	0 to 60
Default value:	0

## 21.40 TREEDEPTH system variable

### 21.40.1 Tree depth

Specifies the maximum number of times the index can be divided into branches to enhance performance.

When set to zero, entities are always processed in database order, with no performance benefit from spatial indexing.

When set to a positive value, spatial indexing is applied and supports up to five digits. The first three digits are for model space and the remaining digits are for paper space.



When set to a negative value, the Z coordinates of all entities are ignored, whether in model space or paper space. Because z coordinates are ignored, a negative value is most appropriate and efficient for 2D drawings.

Type:	Short
Saved in:	Drawing
Default value:	3020
Possible values:	0: Suppress spatial indexing >0: Apply spatial indexing <0: Ignore Z coordinates

## 21.41 TREEMAX system variable

### 21.41.1 Tree maximum

When regenerating a drawing TREEMAX limits the use of memory by limiting the number of nodes in the spatial index (oct-tree). By imposing a fixed limit with TREEMAX, you can load drawings created on systems with more memory than your system and with a larger TREEDEPTH than your system can handle. These drawings, if left unchecked, have an oct-tree large enough to eventually consume more memory than is available to your computer. TREEMAX also provides a safeguard against experimentation with inappropriately high TREEDEPTH values.

Type:	Long
Saved in:	Registry
Default value:	10000000

## 21.42 TRIMMODE system variable


### 21.42.1 Trim mode

Specifies whether the length of the selected entities or polyline segments for chamfers and fillets are adjusted (trimmed or lengthened).

Type:	Boolean
Saved in:	Registry
Default value:	On



Possible values:	Off (0): Don't trim selected edges to the endpoints of chamfer lines and fillet arcs On (1): Trim selected edges to the endpoints of chamfer lines and fillet arcs
------------------	---

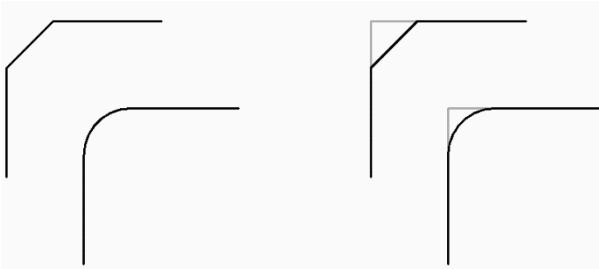

## 21.43 TRUSTEDPATHS system variable

### 21.43.1 Trusted executable file locations

Folders from which executable files may be loaded.

Read-only

Type:	String
Saved in:	Not saved
Default value:	

## 21.44 TSPACEFAC system variable

### 21.44.1 Text space factor

Specifies the line spacing distance of multiline text measured as a factor of text height. Values between 0.25 and 4 are accepted.

Type:	Real
Saved in:	Not saved
Range:	0.25 to 4.0
Default value:	1.0



## 21.45 TSPACETYPE system variable

### 21.45.1 Text space type

Specifies the type of line spacing used for multiline text.

- At least: adjusts line spacing based on the tallest character(s) in a line.
- Exactly: uses the specified line spacing, regardless of individual character sizes.

Type:	Short
Saved in:	Registry
Range:	1 to 2
Default value:	1
Possible values:	1: At least 2: Exactly

## 21.46 TSTACKALIGN system variable

### 21.46.1 Text stack align

Specifies the vertical alignment of stacked text: bottom, center or top.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Align bottom 1: Align center 2: Align top

## 21.47 TSTACKSIZE system variable

### 21.47.1 Text stack size

Specifies the percentage at which the stacked text fraction height is relative to the current height of the selected text. Values between 25 and 125 are accepted.



Type:	Short
Saved in:	Drawing
Range:	25 to 125
Default value:	70

## 21.48 TTFASTEXT system variable

### 21.48.1 TrueType Text displaying and printing mode

Flags controlling whether TrueType text is drawn/printed as vectorized graphics or as text.

Type:	Short
Saved in:	Registry
Default value:	3
Possible values:	1: Display text as text 2: Print/preview text as text



## 22. U

### 22.1 UCSAXISANG system variable

#### 22.1.1 UCS axis angle

Specifies the default angle, in degrees, for rotating the UCS around its X, Y, or Z axis, using the UCS command.

Type:	Real
Saved in:	Registry
Range:	5 to 180
Default value:	90

### 22.2 UCSBASE system variable

#### 22.2.1 UCS base

Specifies the name of the UCS which defines the orthographic UCS.

Type:	String
Saved in:	Drawing
Default value:	"WORLD"

### 22.3 UCSDETECT system variable

#### 22.3.1 UCS detect

Specifies the dynamic UCS. The dynamic UCS is a temporary UCS that is automatically activated when the cursor hovers over a 3D solid's face or 2D entity. A negative value is the same as 0, but helps in storing the earlier value. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	-3 to 3
Default value:	1



Possible options:	negative: Disable dynamic UCS 1: Enable for faces of 3D solid and regions. 2: Enable for 2D entities
-------------------	--

## 22.4 UCSFOLLOW system variable

### 22.4.1 UCS follow

Specifies whether a plan view (A top view zoomed to extents) is generated automatically whenever the UCS changes. It is recommended to switch UCSDETECT off in this case.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't show plan view when changing UCS On (1): Show plan view when changing UCS

## 22.5 UCSICON system variable

### 22.5.1 UCS icon

Specifies the display and position of the UCS icon for the current viewport. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Drawing
Default value:	3
Possible options:	0: No icon 1: Show icon 2: at origin

## 22.6 UCSICONPOS system variable

### 22.6.1 UCS icon position

Specifies the non-origin location of the UCS Icon.

BricsCAD only



Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	1
Possible values:	0: Lower right 1: Lower left 2: Upper right 3: Upper left

## 22.7 UCSNAME system variable

### 22.7.1 UCS name

Specifies the name of the UCS for the current viewport in the current working space.

Read-only

Type:	String
Saved in:	Drawing

## 22.8 UCSORG system variable

### 22.8.1 UCS origin

Stores the current coordinate system's origin point for the current viewport.

Read-only

Type:	3D point
Saved in:	Drawing
Default value:	0,0,0



## 22.9 UCSORTHO system variable

### 22.9.1 UCS orthographic

Specifies whether or not the related orthographic UCS setting is activated automatically when selecting an orthographic view with the -VIEW command or the LookFrom widget (unless NAVVCUBEORIENT is set to UCS).

Type:	Boolean
Saved in:	Registry
Default value:	Off
Possible values:	Off (0): When an orthographic view is selected, don't automatically activate the related orthographic UCS On (1): When an orthographic view is selected, automatically activate the related orthographic UCS

## 22.10 UCSVIEW system variable

### 22.10.1 UCS view

Specifies whether or not the current UCS will be saved with a named view.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't save current UCS with named view On (1): Save current UCS with named view

## 22.11 UCSVP system variable

### 22.11.1 UCS viewports

Specifies whether the UCS in all viewports is fixed or changes to reflect the currently active viewport's UCS.

Type:	Boolean
Saved in:	Drawing



Default value:	On
Possible values:	Off (0): Not locked (UCS stored in viewport) On (1): Locked (UCS stored in viewport)

## 22.12 UCSXDIR system variable

### 22.12.1 UCS X direction

Stores the current coordinate system's X direction for the current viewport.

Read-only

Type:	3D point
Saved in:	Drawing
Default value:	1,0,0

## 22.13 UCSYDIR system variable

### 22.13.1 UCS Y direction

Stores the current coordinate system's Y direction for the current viewport.

Read-only

Type:	3D point
Saved in:	Drawing
Default value:	0,1,0

## 22.14 UNDOCTL system variable

### 22.14.1 Undo control

Specifies the state of the UNDO command. The value is stored as a bitcode using the sum of the values of all selected options.

Read-only

Type:	Short
Saved in:	Not saved



Default value:	5
Possible options:	0: Undo off 1: Undo on 2: Only one command can be undone 4: Auto is turned on 8: A group is currently active

## 22.15 UNDOMARKS system variable

### 22.15.1 Undo marks

Shows the current number of marks placed in the Undo control using the MARK option. The MARK and BACK options are not available if a group is currently active.

Read-only

Type:	Short
Saved in:	Not saved

## 22.16 UNITMODE system variable

### 22.16.1 Unit mode

Specifies how Imperial units are displayed.

Type:	Boolean
Saved in:	Drawing
Default value:	Off
Possible values:	Off (0): Don't remove spaces when converting distances or angles to text On (1): Remove spaces when converting distances or angles to text

## 22.17 USECOMMUNICATOR system variable

### 22.17.1 Use Communicator

Indicates that a Communicator license was activated. If the license is changed, the new level comes into effect after restarting the program.

- 0: no license, Communicator import and export formats are not available.
- 1: trial, runs Communicator in trial mode, expiring after 30 days.



- 2: full, runs the full communicator import-export set.  
BricsCAD only

Type:	Short
Saved in:	Preference
Range:	0 to 2
Default value:	1
Possible values:	0: Not using Communicator 1: Using Communicator Trial 2: Using Communicator

## 22.18 USERI1 system variable

### 22.18.1 User integer 1

First of 5 variables that can be used by the user to store integer values.

Type:	Short
Saved in:	Drawing
Default value:	0

## 22.19 USERI2 system variable

### 22.19.1 User integer 2

Second of 5 variables that can be used by the user to store integer values.

Type:	Short
Saved in:	Drawing
Default value:	0

## 22.20 USERI3 system variable

### 22.20.1 User integer 3

Third of 5 variables that can be used by the user to store integer values.



Type:	Short
Saved in:	Drawing
Default value:	0

## 22.21 USERI4 system variable

### 22.21.1 User integer 4

Fourth of 5 variables that can be used by the user to store integer values.

Type:	Short
Saved in:	Drawing
Default value:	0

## 22.22 USERI5 system variable

### 22.22.1 User integer 5

Fifth of 5 variables that can be used by the user to store integer values.

Type:	Short
Saved in:	Drawing
Default value:	0

## 22.23 USERR1 system variable

### 22.23.1 User real 1

First of 5 variables that can be used by the user to store real numerical values.

Type:	Real
Saved in:	Drawing
Default value:	0.0



## 22.24 USERR2 system variable

### 22.24.1 User real 2

Second of 5 variables that can be used by the user to store real numerical values.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 22.25 USERR3 system variable

### 22.25.1 User real 3

Third of 5 variables that can be used by the user to store real numerical values.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 22.26 USERR4 system variable

### 22.26.1 User real 4

Fourth of 5 variables that can be used by the user to store real numerical values.

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 22.27 USERR5 system variable

### 22.27.1 User real 5

Fifth of 5 variables that can be used by the user to store real numerical values.

Type:	Real
-------	------



Saved in:	Drawing
Default value:	0.0

## 22.28 USERS1 system variable

### 22.28.1 User string 1

First of 5 variables that can be used by the user to store string values.

Type:	String
Saved in:	Not saved

## 22.29 USERS2 system variable

### 22.29.1 User string 2

Second of 5 variables that can be used by the user to store string values.

Type:	String
Saved in:	Not saved

## 22.30 USERS3 system variable

### 22.30.1 User string 3

Third of 5 variables that can be used by the user to store string values.

Type:	String
Saved in:	Not saved

## 22.31 USERS4 system variable

### 22.31.1 User string 4

Fourth of 5 variables that can be used by the user to store string values.

Type:	String
Saved in:	Not saved



## 22.32 USERS5 system variable

### 22.32.1 User string 5

Fifth of 5 variables that can be used by the user to store string values.

Type:	String
Saved in:	Not saved

## 22.33 USESTANDARDOPENFILEDIALOG system variable

### 22.33.1 Use standard open file dialog (Windows)

Specifies whether to show an additional folder in the file dialog for the open, save as and insert commands.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	Off

## 22.34 USRTIMER system variable

### 22.34.1 User timer

Shows the user-elapsed timer. You can start, stop and reset the timer with the TIME command.

Type:	Boolean
Saved in:	Drawing
Default value:	On



## 23. V

### 23.1 VBAMACROS system variable

#### 23.1.1 Enable macros

Specifies whether macros are enabled when loading a VBA-project.

BricsCAD only

Type:	Boolean
Saved in:	Preference
Default value:	On
Possible values:	Off (0): Disable macros on loading VBA-project On (1): Enable macros on loading VBA-project

### 23.2 VENDORNAME system variable

#### 23.2.1 Vendor name

Shows the vendor name.

BricsCAD only

Read-only

Type:	String
Saved in:	Not saved
Default value:	"Bricsys"

### 23.3 VERSIONCONTROLPATH system variable

#### 23.3.1 Version control path

Specifies the path to the current version control directory.

BricsCAD only

Type:	String
Saved in:	Registry



## 23.4 VERSIONCUSTOMZABLEFILES system variable

### 23.4.1 Version customizable files

Current version of the CUI and PGP files.

Read-only

Type:	String
Saved in:	Preference

## 23.5 VIEWCTR system variable

### 23.5.1 View center

Specifies the current viewport's center of view, expressed in UCS coordinates.

Read-only

Type:	3D point
Saved in:	Drawing

## 23.6 VIEWDIR system variable

### 23.6.1 View direction

Specifies the current viewport's viewing direction, expressed in UCS coordinates.

Read-only

Type:	3D point
Saved in:	Drawing

## 23.7 VIEWMODE system variable

### 23.7.1 View mode

Specifies the current viewport's View mode. The value is stored as a bitcode using the sum of the values of all selected options. If 'Front clip not at eye' (16) is on, the front clip distance (FRONTZ) sets the front clipping plane. If off, the front clipping plane passes through the camera point (vectors behind the camera are not displayed). This flag is ignored if the front-clipping bit (2) is off.

Read-only



Type:	Short
Saved in:	Drawing
Range:	0 to 31
Possible options:	0: Turned off 1: Perspective view active 2: Front clipping on 4: Back clipping on 8: UCS Follow mode on 16: Front clip not at eye

## 23.8 VIEWSIZE system variable

### 23.8.1 View size

Specifies the view height, measured in drawing units, for the current viewport.

Read-only

Type:	Real
Saved in:	Drawing
Default value:	0.0

## 23.9 VIEWTWIST system variable

### 23.9.1 View twist

Specifies the view twist angle, measured relative to the WCS, for the current viewport.

Read-only

Type:	Real
Saved in:	Drawing



## 23.10 VIEWUPDATEAUTO system variable

### 23.10.1 Automatically update drawing views

Specifies whether model documentation drawing views are updated automatically when the source model changes. When turned off, the **ViewUpdate** command manually updates the drawing views created by **ViewBase** and **ViewSection** commands. This only works in paper space.

Type:	Boolean
Saved in:	Drawing
Default value:	On
Possible values:	Off (0): Don't update drawing views automatically On (1): Update drawing views automatically

## 23.11 VISRETAIN system variable

### 23.11.1 Visibility retain

Specifies the visibility, color, linetype, linewidth, and, if PSTYLEPOLICY is set to OFF (0), plotstyles of xref-dependent layers. It also specifies whether nested xref path changes are saved.

If Off (0): Changes made to xref-dependent layers in the current drawing are valid in the current session only and are Not saved with the drawing. When the current drawing is reopened, the layer table is reloaded from the reference drawing and the current drawing reflects those settings. The layer settings affected are: On, Off, Freeze, Thaw, Color, Ltype, LWeight, and PStyle (if PSTYLEPOLICY is set to 0).

If On (1): Layer settings are saved with the current drawing's layer table and persist from session to session.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: Off, the layer table, as stored in the reference drawing (Xref) takes precedence 1: On, Xref-dependent layer changes made in the current drawing take precedence



## 23.12 VOLUMEPREC system variable

### 23.12.1 Volume precision

Specifies the number of decimal places displayed for volumes when the volume bit of PROPUNITS is on. If negative, LUPREC (Linear Unit Precision) is used.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	-1 to 8
Default value:	-1
Possible values:	<p>-1: Use LUPREC 0 1: 0.0 2: 0.00 3: 0.000 4: 0.0000 5: 0.00000 6: 0.000000 7: 0.0000000 8: 0.00000000</p>

## 23.13 VOLUMEUNITS system variable

### 23.13.1 Volume units

Specifies a list of units used for displaying volumes when the volume bit of PROPUNITS is on. If empty, all volumes are displayed in the current drawing unit. When one or more units are selected in the VolumeUnits dialog box, the program uses the unit that is the best fit. The Format Volume Properties bit of the Property Units variable must be turned on.

BricsCAD only

Type:	String
Saved in:	Registry
Default value:	"in ft mi µm mm cm m km"



## 23.14 VP MAXIMIZED STATE system variable

### 23.14.1 Viewport maximized

Displays a value to indicate whether the viewport is maximized. You cannot plot or publish when the viewport is maximized.

AutoCAD only

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	Off
Possible values:	Off (0): Viewport is not maximized On (1): Viewport is maximized

## 23.15 VPROTATEASSOC system variable

### 23.15.1 Rotate view

Allow rotation of a view within a viewport when a viewport is rotated.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Rotate view off On (1): Rotate view on

## 23.16 VS MAX system variable

### 23.16.1 Virtual screen maximum

Shows the coordinates of the upper-right corner of the current viewport's virtual screen.

Read-only

Type:	3D point
Saved in:	Drawing



## 23.17 VSMIN system variable

### 23.17.1 Virtual screen minimum

Shows the coordinates of the lower-left corner of the current viewport's virtual screen.

Read-only

Type:	3D point
Saved in:	Drawing

## 23.18 VTDURATION system variable

### 23.18.1 View transition duration

Specifies the duration of animated view transitions in milliseconds.

Type:	Short
Saved in:	Registry
Range:	0 to 5000
Default value:	750

## 23.19 VTENABLE system variable

### 23.19.1 Enable view transitions

Specifies whether animated view transitions are enabled for zoom/pan and/or for view rotation operations. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 7
Default value:	3
Possible options:	1: For zoom/pan 2: For rotation 4: For unattended mode



## 23.20 VTFPS system variable

### 23.20.1 View transition minimum FPS

Specifies the minimum FPS (frames per second) required for enabling animated view transitions. That is 7 by default, which means that the redraw time should take less than 143 (=1000/7) milliseconds. If the computer is not capable to redraw the view fast enough, no animation will be available.

Type:	Short
Saved in:	Registry
Range:	1 to 30
Default value:	7



## 24. W

### 24.1 WALLWIDTH system variable

#### 24.1.1 Default wall width

Default width of walls, when using BIMQUICKDRAW.

BricsCAD only

Type:	Real
Saved in:	Drawing
Default value:	250 mm / 10"

### 24.2 WARNINGMESSAGES system variable

#### 24.2.1 Warning messages

Specifies whether warning messages are displayed in certain situations. The value is stored as a bitcode using the sum of the values of all selected options.

BricsCAD only

Type:	Long
Saved in:	Preference
Default value:	1048575



Possible options:	1: Selecting 3D context with hardware rendering off 2: Modifying tool property in Customize dialog 4: Deleting sheet custom property 8: Moving entities to frozen or off layer 16: Saving to previous version not supporting some entities 32: Detecting modified attachments when opening the parent drawing 64: Creating new layer not matching the current layer filter 128: Render: Tile sizes between 4 and 127 are processed as 128 256: Expanding category mass in properties panel 512: Deleting an item in Customize dialog 1024: Publish: Save sheet list 2048: Delete layouts in Page Setup Explorer 4096: Mass properties calculation takes long time 8192: Array editing state 16384: Incompatible units 32768: Modified block definition will cause all related block references update 65536: A Data Link has changed, Any tables using this link may need to be updated 131072: VIEWBASE usage for architectural drawings 262144 Expanding a closed category in properties panel 524288: Empty category in properties panel is removed
-------------------	---

## 24.3 WHIPARC system variable

### 24.3.1 Whip arcs

Specifies whether circles and circular arcs display as true circles or as a series of vectors.

Type:	Short
Saved in:	Registry
Range:	0 to 1
Default value:	1
Possible values:	0: Display circles and arcs as a series of vectors 1: Display as true circles and arcs



## 24.4 WHIPTHREAD system variable

### 24.4.1 Whip thread

Specifies whether regen and redraw will be done multithreaded, if the machine has multiple processors. Not supported yet. When multithreaded processing is used for redraw operations (value 2 or 3), the order of entities specified with the DRAWORDER command is not guaranteed to be preserved for display but is preserved for plotting. The value is stored as a bitcode using the sum of the values of all selected options.

Type:	Short
Saved in:	Registry
Range:	0 to 3
Default value:	0
Possible options:	0: No multithreaded processing 1: Regeneration multithreaded processing 2: Redraw multithreaded processing

## 24.5 WINDOWAREACOLOR system variable

### 24.5.1 Window area color

Specifies the color for window selection areas. In effect only when SELECTIONAREA setting is on.

Type:	Short
Saved in:	Registry
Range:	1 to 255
Default value:	150

## 24.6 WIPEOUTFRAME system variable

### 24.6.1 Wipeout frame

Specifies the display of frames for wipeout entities. If 0: frames are temporarily displayed for entity selection and selection preview.

Type:	Short
-------	-------



Saved in:	Drawing
Range:	0 to 2
Default value:	1
Possible values:	0: Hide wipeout frames 1: Display and plot wipeout frames 2: Display but do not plot wipeout frames

## 24.7 WMFBKGND system variable

### 24.7.1 Windows Meta File background

Specifies how the background of a WMF (Windows Meta File) or Copy Clip is created and displayed in other applications.

Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Transparent background; foreground depends on WMFFOREGND On (1): Current background color; foreground remains unchanged

## 24.8 WMFFOREGND system variable

### 24.8.1 Windows Meta File foreground

Specifies how the foreground of a WMF (Windows Meta File) or Copy Clip is created and displayed in other applications. WMFFOREGND applies only when WMFBKGND is set to 0.

Type:	Boolean
Saved in:	Registry
Default value:	0
Possible values:	Off (0): Ensure foreground color is darker than background color On (1): Ensure foreground color is lighter than background color



## 24.9 WNDLMAIN system variable

### 24.9.1 Main window state

Stores the state of the main graphics window.

BricsCAD only

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	2
Possible values:	0: Normal 1: Minimized 2: Maximized

## 24.10 WNDLSCRL system variable

### 24.10.1 Window scrollbars (Windows)

Specifies the display of scrollbars on the main graphics window.

BricsCAD only

Type:	Boolean
Saved in:	Workspace
Default value:	Off
Possible values:	Off (0): Don't show scrollbars On (1): Show scrollbars

## 24.11 WNDLTEXT system variable

### 24.11.1 Text window state

Stores the state of the text window.

BricsCAD only

Type:	Short
-------	-------



Saved in:	Registry
Possible values:	0: Hidden 1: Normal 2: Minimized 3: Maximized

## 24.12 WNDPMAIN system variable

### 24.12.1 Main window top left

Stores the top left position of the main graphics window.

BricsCAD only

Type:	2D point
Saved in:	Registry

## 24.13 WNDPTEXT system variable

### 24.13.1 Text window top left

Stores the top left position of the text window.

BricsCAD only

Type:	2D point
Saved in:	Registry

## 24.14 WNDSMAIN system variable

### 24.14.1 Main window size

Stores the size of the main graphics window.

BricsCAD only

Type:	2D point
Saved in:	Registry



## 24.15 WNDSTEXT system variable

### 24.15.1 Text window size

Stores the size of the text window.

BricsCAD only

Type:	2D point
Saved in:	Registry

## 24.16 WORLDUCS system variable

### 24.16.1 World UCS

Specifies whether or not the UCS is the same as the WCS.

Read-only

Type:	Boolean
Saved in:	Not saved
Possible values:	Off (0): UCS doesn't match the WCS On (1): UCS matches the WCS

## 24.17 WORLDVIEW system variable

### 24.17.1 World view

Specifies whether the current UCS changes to the WCS during DVIEW or VPOINT commands.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	1
Possible values:	0: UCS remains unchanged 1: UCS changes to the WCS for the duration of the command; the command input is relative to the current UCS



## 24.18 WRITESTAT system variable

### 24.18.1 Write status

Shows the state in which a drawing is opened: read-only or that it can be written to. This variable is used in lisp to determine the write status of drawing.

Read-only

Type:	Boolean
Saved in:	Not saved
Default value:	On
Possible values:	Off (0): Can't write to the drawing On (1): Can write to the drawing

## 24.19 WSAUTOSAVE system variable

### 24.19.1 Workspace autosave

Specifies whether changes made to a workspace are automatically saved.

Type:	Boolean
Saved in:	Registry
Default value:	On
Possible values:	Off (0): Don't save automatically On (1): Save automatically

## 24.20 WSCURRENT system variable

### 24.20.1 Current workspace

The name of the current workspace.

Type:	String
Saved in:	Registry



## 25. X

### 25.1 XCLIPFRAME system variable

#### 25.1.1 Xref clipping frame

Specifies the display of xref clipping boundaries. The FRAME system variable overrides the XCLIPFRAME setting.

Type:	Short
Saved in:	Drawing
Range:	0 to 2
Default value:	2
Possible values:	0: Hide clipping boundaries 1: Display and plot clipping boundaries 2: Display but do not plot clipping boundaries

### 25.2 XDWGFADECTL system variable

#### 25.2.1 Xref database fade control

Specifies the fading level for XREF inserts. Non-positive values disable fading.

Type:	Short
Saved in:	Registry
Range:	-90 to 90
Default value:	70

### 25.3 XEDIT system variable

#### 25.3.1 Xref editable

Specifies the in-place editing of the current drawing if referenced by another drawing.

Type:	Boolean
Saved in:	Drawing



Default value:	On
Possible values:	Off (0): Can't use in-place reference editing On (1): Can use in-place reference editing

## 25.4 XFADECTL system variable

### 25.4.1 Reference editing fade control

Specifies the fading level for references which are edited in-place. This setting affects only the entities that are not being edited in the reference. Values between 0 and 90 are accepted.

Type:	Short
Saved in:	Registry
Range:	0 to 90
Default value:	50

## 25.5 XLOADCTL system variable

### 25.5.1 Xref load control

Not supported yet. Specifies xref demand-loading and determines whether a copy or the original drawing is opened.

Type:	Short
Saved in:	Registry
Range:	0 to 2
Default value:	1
Possible values:	0: Turn off demand-loading; the entire drawing is loaded 1: Turn on demand-loading; referenced drawings are kept open and locked 2: Turn on demand-loading; copies of referenced drawings are opened and locked; referenced drawings are not locked



## 25.6 XLOADPATH system variable

### 25.6.1 Xref load path

Specifies a path to store temporary copies of demand-loaded xrefs (see also Xref load control).

Type:	String Standard
Saved in:	Registry

## 25.7 XNOTIFYTIME system variable

### 25.7.1 Xnotify time

Specifies a number of minutes between checking for modified xrefs, images and PDF documents. This is if XREFNOTIFY, IMAGENOTIFY and/or PDFNOTIFY is ON.

Type:	Short
Saved in:	Registry
Range:	0 to 10080
Default value:	5

## 25.8 XREFCTL system variable

### 25.8.1 Xref control

Toggles the creation of external reference log files (XLG) on/off.

Type:	Boolean
Saved in:	Registry
Range:	Off
Possible values:	Off (0): Don't write log files On (1): Write log files

## 25.9 XREFNOTIFY system variable

### 25.9.1 Xref notify

Enables/disables the notification about missing xrefs when opening the parent drawing.



Type:	Boolean
Saved in:	Registry
Possible values:	Off (0): Disable xref notification On (1): Enable xref notification

## 25.10 XREFOVERRIDE system variable

### 25.10.1 Xref override

Specifies the display of entity visual properties (such as color, linetype, linewidth, transparency, or plot style) on referenced layers.

If Off (0): When the properties of the entities on the XREF drawing are set to ByLayer, any changes to the xref layer properties are displayed in the current drawing.

If On (1): When the properties of the entities on the XREF drawing are not set to ByLayer, entities on xref layers are treated as if their properties are set to ByLayer. And every external reference layer can have its own set of layer overrides.

Type:	Short
Saved in:	Drawing
Range:	0 to 1
Default value:	0
Possible values:	Off (0): Only ByLayer properties of the entities in the XREF drawing can be changed On (1): All properties of entities in the XREF drawing can be changed by its original layer property



## 26. Z

### 26.1 ZOOMFACTOR system variable

#### 26.1.1 Zoom factor

Specifies the incremental change in zoom with each mouse-wheel action, whether forward or backward.

When zooming in, the incremental step decreases gradually allowing to focus on a particularly detail easily. Values between 3 and 100 are accepted. The higher the number, the more the change.

Type:	Short
Saved in:	Registry
Range:	3 to 100
Default value:	40

### 26.2 ZOOMWHEEL system variable

#### 26.2.1 Mouse wheel zoom direction

Toggles mouse wheel zoom direction.

Type:	Short
Saved in:	Registry
Default value:	0
Possible values:	0: Move wheel forward zooms in; move wheel back zooms out 1: Move wheel forward zooms out; move wheel back zooms in